

LOW-LEVEL RF SYSTEM FOR THE SUPERKEKB INJECTOR LINAC

T. Matsumoto^{1,2†}, M. Akemoto^{1,2}, D. Arakawa¹, H. Katagiri¹, T. Miura^{1,2}, F. Qiu^{1,2}, Y. Yano¹,
¹KEK, 1-1 Oho, Tsukuba, Ibaraki, 305-0801, Japan

²SOKENDAI (The Graduate University for Advanced Studies), Tsukuba, Ibaraki, 305-0801, Japan

Abstract

The low-level RF system of the KEKB injector linac has been upgraded for the SuperKEKB. To satisfy the operational requirement for the SuperKEKB that is 40-times higher in luminosity compared with the KEKB, the main drive system in the low-level RF system of the KEKB injector linac was reconstructed. With recent technical developments in the solid-state amplifier, the configuration of the sub-booster system is expected to change. An outline of the low-level RF system for the SuperKEKB injector linac is described herein.

INTRODUCTION

After approximately 10 years of operation of the KEKB, the KEKB injector linac has been upgraded for use in the SuperKEKB (Fig. 1). To archive 40-times higher luminosity compared with the KEKB, the electron/positron beam intensities and their emittances required for the linac must be upgraded [1]. To satisfy these requirements at the linac, a photo-cathode RF gun is added for the electron injection to the high energy ring (HER), and a damping ring (DR) is introduced for the positron injection to the low energy ring (LER).

The KEKB injector linac is used as a multi-purpose injector not only for the KEKB HER/LER, but also for the photon factory (PF), and the photon factory advanced ring for pulse X-rays (PF-AR). During the KEKB operation period, simultaneous top-up injection into the three storage rings (HER, LER, and PF) was established. In the simultaneous top-up injection, the beam injection parame-

ter of each ring is controlled with an event-based system and switched pulse to pulse at 50-Hz repetition [2].

To satisfy the requirements of the SuperKEKB and synchronize with the event-based system for top-up injection, new RF sources for the photo-cathode RF gun, energy compensation system at the DR, and bunch compensation system for the DR are installed. Furthermore, various developments and changes have been planned and implemented for the low-level RF (LLRF) system compared with that of the KEKB injector linac [3]:

- LLRF control unit and rf monitor system based on digital system [4, 5],
- Main drive system for compatibility between laser oscillation for RF gun and HER/LER beam injection,
- Sub-booster system based on 600-W solid-state amplifiers.

The main drive system and the sub-booster system are described herein.

MAIN DRIVE SYSTEM

The main drive system is equipped with a frequency multiplier/divider and two-frequency (571 MHz and 2856 MHz) phase shifters. The master frequency of the SuperKEKB injector linac is 571.2 MHz. The signal is generated with a signal generator (Keysight; E8663D-HY2), which is synchronized with the SuperKEKB master oscillator via a 10-MHz reference signal.

571-MHz Phase Shifter

For laser oscillation of the RF gun, a supply of clock

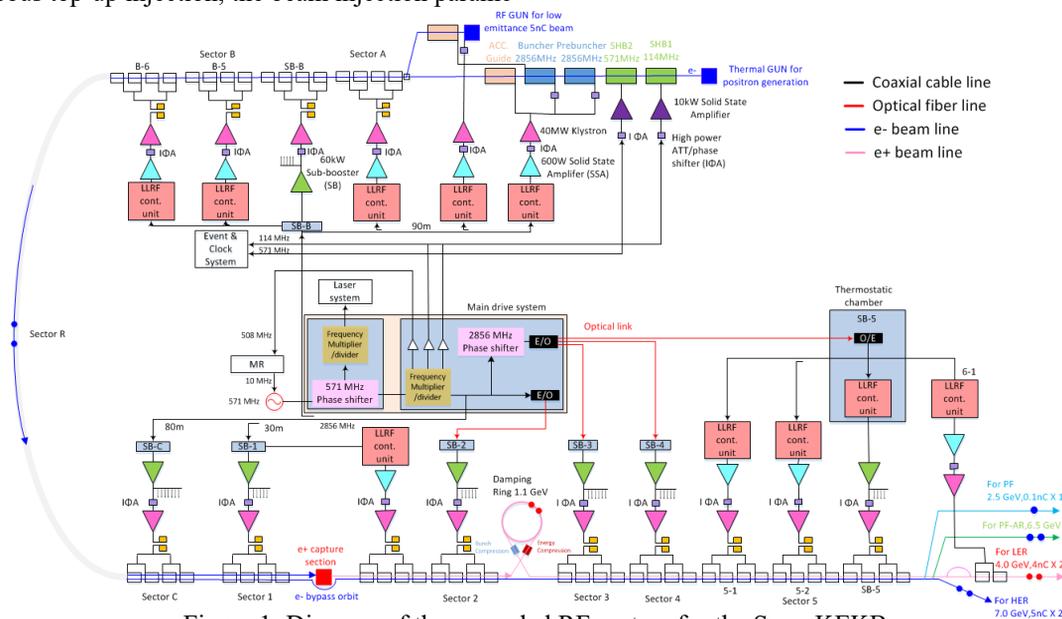


Figure 1: Diagram of the upgraded RF system for the SuperKEKB.

† toshihiro.matsumoto@kek.jp

composed of two Peltier devices with an endothermic quantity of 250 W and a heater for precise temperature control [6]. By adopting a Peltier component instead of a compressor, the RF components located inside the thermostatic chamber are not affected by mechanical vibrations and a long operational life can be expected.

The phase drift of the signals (114.24 MHz/571.2 MHz/2856 MHz/508.9 MHz) output from the main drive system is measured with a sampling oscilloscope (Tektronix; TDS8000) and the measured data is recorded to the EPICS archiver. A one-day drift tendency of zero-cross position at each frequency triggered with 10.38 MHz is shown in Fig. 5. The jitter, the fluctuation of the zero-cross position, of each frequency is estimated with the data shown in Fig. 5 and is listed in Table 2.



Figure 5: One-day's drift tendency of zero-cross position at each frequencies: 114 MHz (red), 571 MHz (light green), 2856 MHz (blue), and 508 MHz (orange).

Table 2: Jitter Estimated one-day's Drift Tendency of Each Signals Triggered with 10.38 MHz

| Signal | Jitter (Estimated) |
|------------|--------------------|
| 114.24 MHz | 1.71 ps |
| 571.2 MHz | 1.10 ps |
| 2856 MHz | 1.75 ps |
| 508.8 MHz | 1.15 ps |

SUB-BOOSTER SYSTEM

In the KEKB injector linac, eight sub-boosters are available and each sub-booster supplies power to four or eight high-power klystrons, as shown in Fig. 5(a). However, for special purposes such as ones in the electron bunching section, positron target and focusing section,

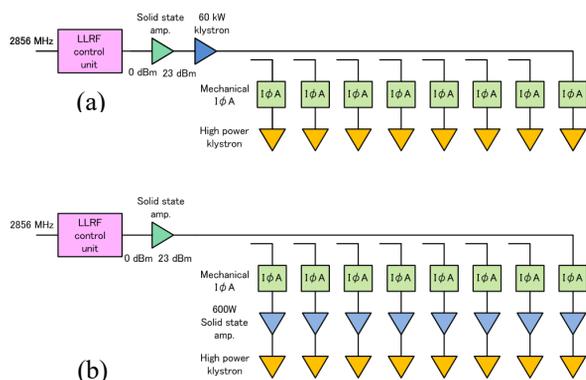


Figure 6: Diagram of the sub-booster system (a) in the KEKB injector linac, (b) planned for the SuperKEKB injector linac.

and energy spread adjustment, one high-power klystron is directly driven with one 600-W solid-state amplifier. The specification of the 600-W solid-state amplifier is shown in Table 3.

Table 3: Specification of the 600-W Solid-State Amplifier

| | |
|--------------|----------------------------|
| Type | Solid-state, AB class |
| Frequency | 2856± 10 MHz |
| Output power | 600 W |
| Gain | 57.8 dB |
| Pulse width | 200 ns – 5 μs |
| Gain | 57.8 dB |
| Cooling | Water cooling |
| Power supply | AC 100 V(1φ50/60Hz), 8.0 A |

Owing to the recent technological advances and cost reduction in solid-state amplifiers, the cost of one 60-kW klystron and that of eight 600-W solid-state amplifiers necessary for constructing one sub-booster system is balanced. Therefore, 60-kW klystrons are expected to be obsolete in the future and replaced with new sub-booster systems of 600-W solid-state amplifiers, as shown in Fig. 6(b).

SUMMARY

To satisfy the operational requirements for the SuperKEKB and synchronize with the event-based system for top-up injection, the LLRF system of the KEKB injector linac has been upgraded.

Various developments and changes have been planned and implemented for the LLRF system of the linac. The main drive system was reconstructed to operate the RF-gun and the DR. We intend to construct new sub-booster system constructed using only 600-W solid-state amplifiers.

REFERENCES

- [1] T. Kamitani *et al.*, “Injector LINAC upgrade for SuperKEKB”, in *Proc. LINAC'10*, Tsukuba, Japan, Sept. 2010, paper MOP011.
- [2] K. Furukawa *et al.*, “Pulse-to-pulse Beam Modulation and Event-based Beam Feedback Systems at KEKB Linac”, in *Proc. IPAC'10*, Kyoto, Japan, May 2010, paper TUOCMH01.
- [3] H. Hanaki *et al.*, “Low-power RF systems for the KEKB injector LINAC”, in *Proc. APAC'98*, Tsukuba, Japan, Mar. 1998.
- [4] T. Miura *et al.*, “LLRF Control Unit for SuperKEKB Injector Linac”, presented at IPAC'18, Vancouver, Canada, Apr.-May 2018, paper WEPAK018, this conference.
- [5] H. Katagiri *et al.*, “RF Monitor System for SuperKEKB Injector Linac”, presented at IPAC'18, Vancouver, Canada, Apr.-May 2018, paper WEPAK016, this conference.
- [6] Y. Yano *et al.*, “Master Oscillator for the KEKB Injector Linac”, *Proc. of 28th Linear Accelerator Meeting in Japan*, TP-15, July 2003.