

# Construction and Operational Performance of a Horizontally Adjustable Beam Profile Monitor at NSLS-II\*

B. Kosciuk<sup>#</sup>, A. Blednykh, S. Seletskiy

Brookhaven National Laboratory, Upton, NY 11973-5000, USA

## Abstract

The NSLS-II Synchrotron Light Source is a 3 GeV electron storage ring currently in the early stages of commissioning at Brookhaven National Laboratory. In order to observe the electron beam cross section in the injection region of the storage ring, a specially designed, horizontally adjustable beam profile monitor was installed at the downstream end of the injection septum. It allows the profile of the injected, bumped or single turn beam to be viewed and measured. In this presentation, we discuss the final design, construction challenges, and operational performance of this novel device.

## DESIGN REQUIREMENTS

The primary design requirements for the NSLS-II beam profile monitor [1] or "flag" are as follows. Insert a scintillator screen into the beam path at three different horizontal positions within the vacuum chamber, allowing the beam cross section and rough position to be captured. The chamber length and internal aperture are defined by the space between the upstream septum chamber and downstream kicker chamber. In this case the overall chamber length is 357mm with 150mm CF (Conflat) flanges. The upstream and downstream internal apertures are different and require a tapered transition over the chamber length.

In order to capture the beam at three different locations, the horizontal screen position needs to be precisely controlled to a resolution of 250 $\mu$ m. It is also desirable to have the screen position infinitely adjustable as opposed to just three discreet positions. A position read back device is also required to verify horizontal position.

Due to space constraints in the injection region, the choice was made to incorporate two sets of RF BPM (radio frequency beam position monitor) button assemblies into the flag chamber. One set of BPMs located 24.25mm from chamber center is intended to measure position of the injected beam while the other set located 15mm from chamber center is intended to measure bumped beam position.

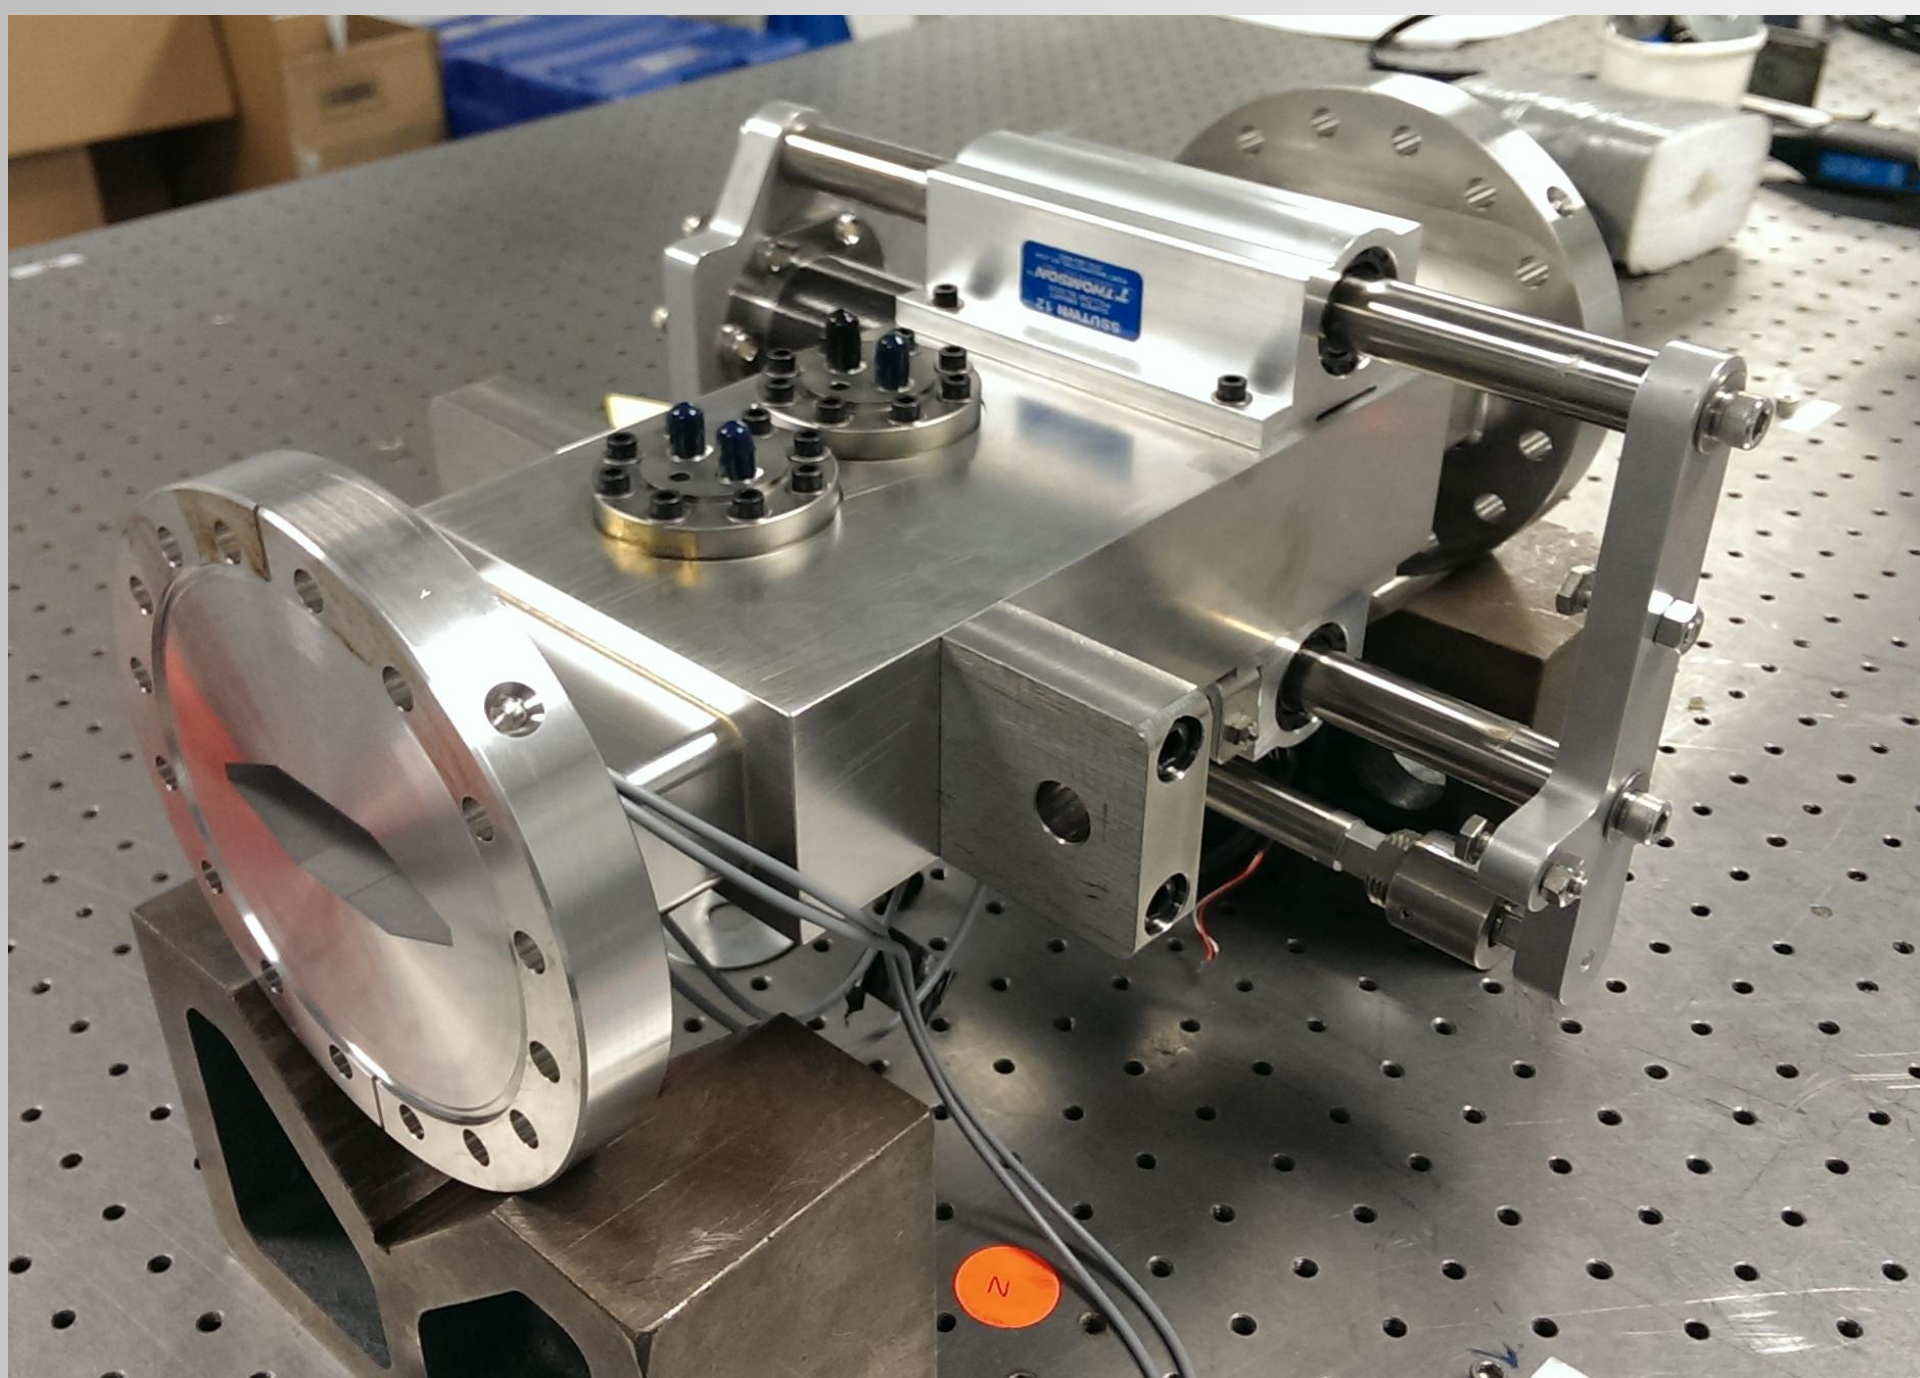


Figure 1: Final assembly of the NSLS-II Beam Profile Monitor

## SCREEN CARRIER ASSEMBLY

The primary component of the flag is a Cerium doped YAG (Yttrium-Aluminum-Garnet) scintillator screen with a 20mm calibration pattern and is produced by Crytur [2]. The elliptically shaped, 200 $\mu$ m thick screen is mounted into a custom machined aluminium screen carrier such that the angle of the screen with respect to the incident electron beam is 45°. The screen carrier assembly consists of the screen carrier optical tube, the YAG screen and the screen retainer. An aperture is cut into the screen carrier tube to allow the injected beam to pass through when viewing the bumped or single turn beams (Fig 2).

The screen carrier assembly is installed in a custom bellows which is mated to the side of the flag chamber via a custom flange and HelicoFlex seal. The free end of the bellows is capped with a fused silica viewport to allow the beam image to be observed by the optical system.

A special provision was designed into the screen retainer. A rim which when the flag is in the parked or home position bears up against a slant coil spring installed in the chamber. This feature serves to shield the cavity inside the bellows and suppress high order modes.



Figure 2: Screen in the parked position showing the RF spring. The HelicoFlex seal is also shown.



NSLS-II construction site taken on 10/9/12 nearing completion.

## CHAMBER CONSTRUCTION

The construction of the flag chamber was by far the most challenging aspect of this design. The final design consists of a three piece stainless steel assembly with two brazed joints. The body of the chamber is a rectangular stainless steel "slab" 57mm x 120mm in cross section. The internal aperture is rectangular and is 25mm x 80mm on the upstream side and tapers to 25mm x 76mm over the 230mm length. The internal aperture was precisely cut via a wire EDM (electro discharge machining) process. Ports were machined into the top, bottom and side of the slab to accept the BPMs and bellows assembly. These ports are designed to be used with HelicoFlex<sup>®</sup> Delta-type UHV (ultra high vacuum) seals and require a specially prepared surface to mate with. The surface finish requirement for these seals is 16 micro inch with a circular lay. Delta type seals are used extensively in the NSLS-II storage ring with great success.

To simplify the chamber assembly, both the upstream and downstream flanges are a one piece fabrication, each is machined from a slug of 304 stainless steel. This eliminated the need for welding Conflat flanges after the brazing was complete. The upstream aperture has a complex internal geometry, tapering from an asymmetric shape corresponding that of the downstream aperture of the septum chamber to a rectangular aperture that matches the central chamber. Machined into the face of the upstream flange is a dovetailed groove designed to accept a slant coil RF spring, the purpose of which is to shorten any cavities where high order modes can exist. The downstream flange tapers from a rectangular shape to the standard NSLS-II 25mm x 76mm hexagonal aperture. The apertures of both flanges were also cut using EDM. Fiducial targets were machined into the circumference of both flanges for in-situ survey and alignment after installation in the storage ring.

The chamber assembly and brazing (Fig 3) were performed in-house and took place in two stages, a high temperature braze for the upstream flange using an 82%Au-18%Ag braze alloy (Premabraz 131) followed by a low temperature braze for the downstream flange using a 56%Ag-42%Cu-2%Ni (Braze 559). Both braze joints were successful after the first attempt as the subsequent leak check revealed.

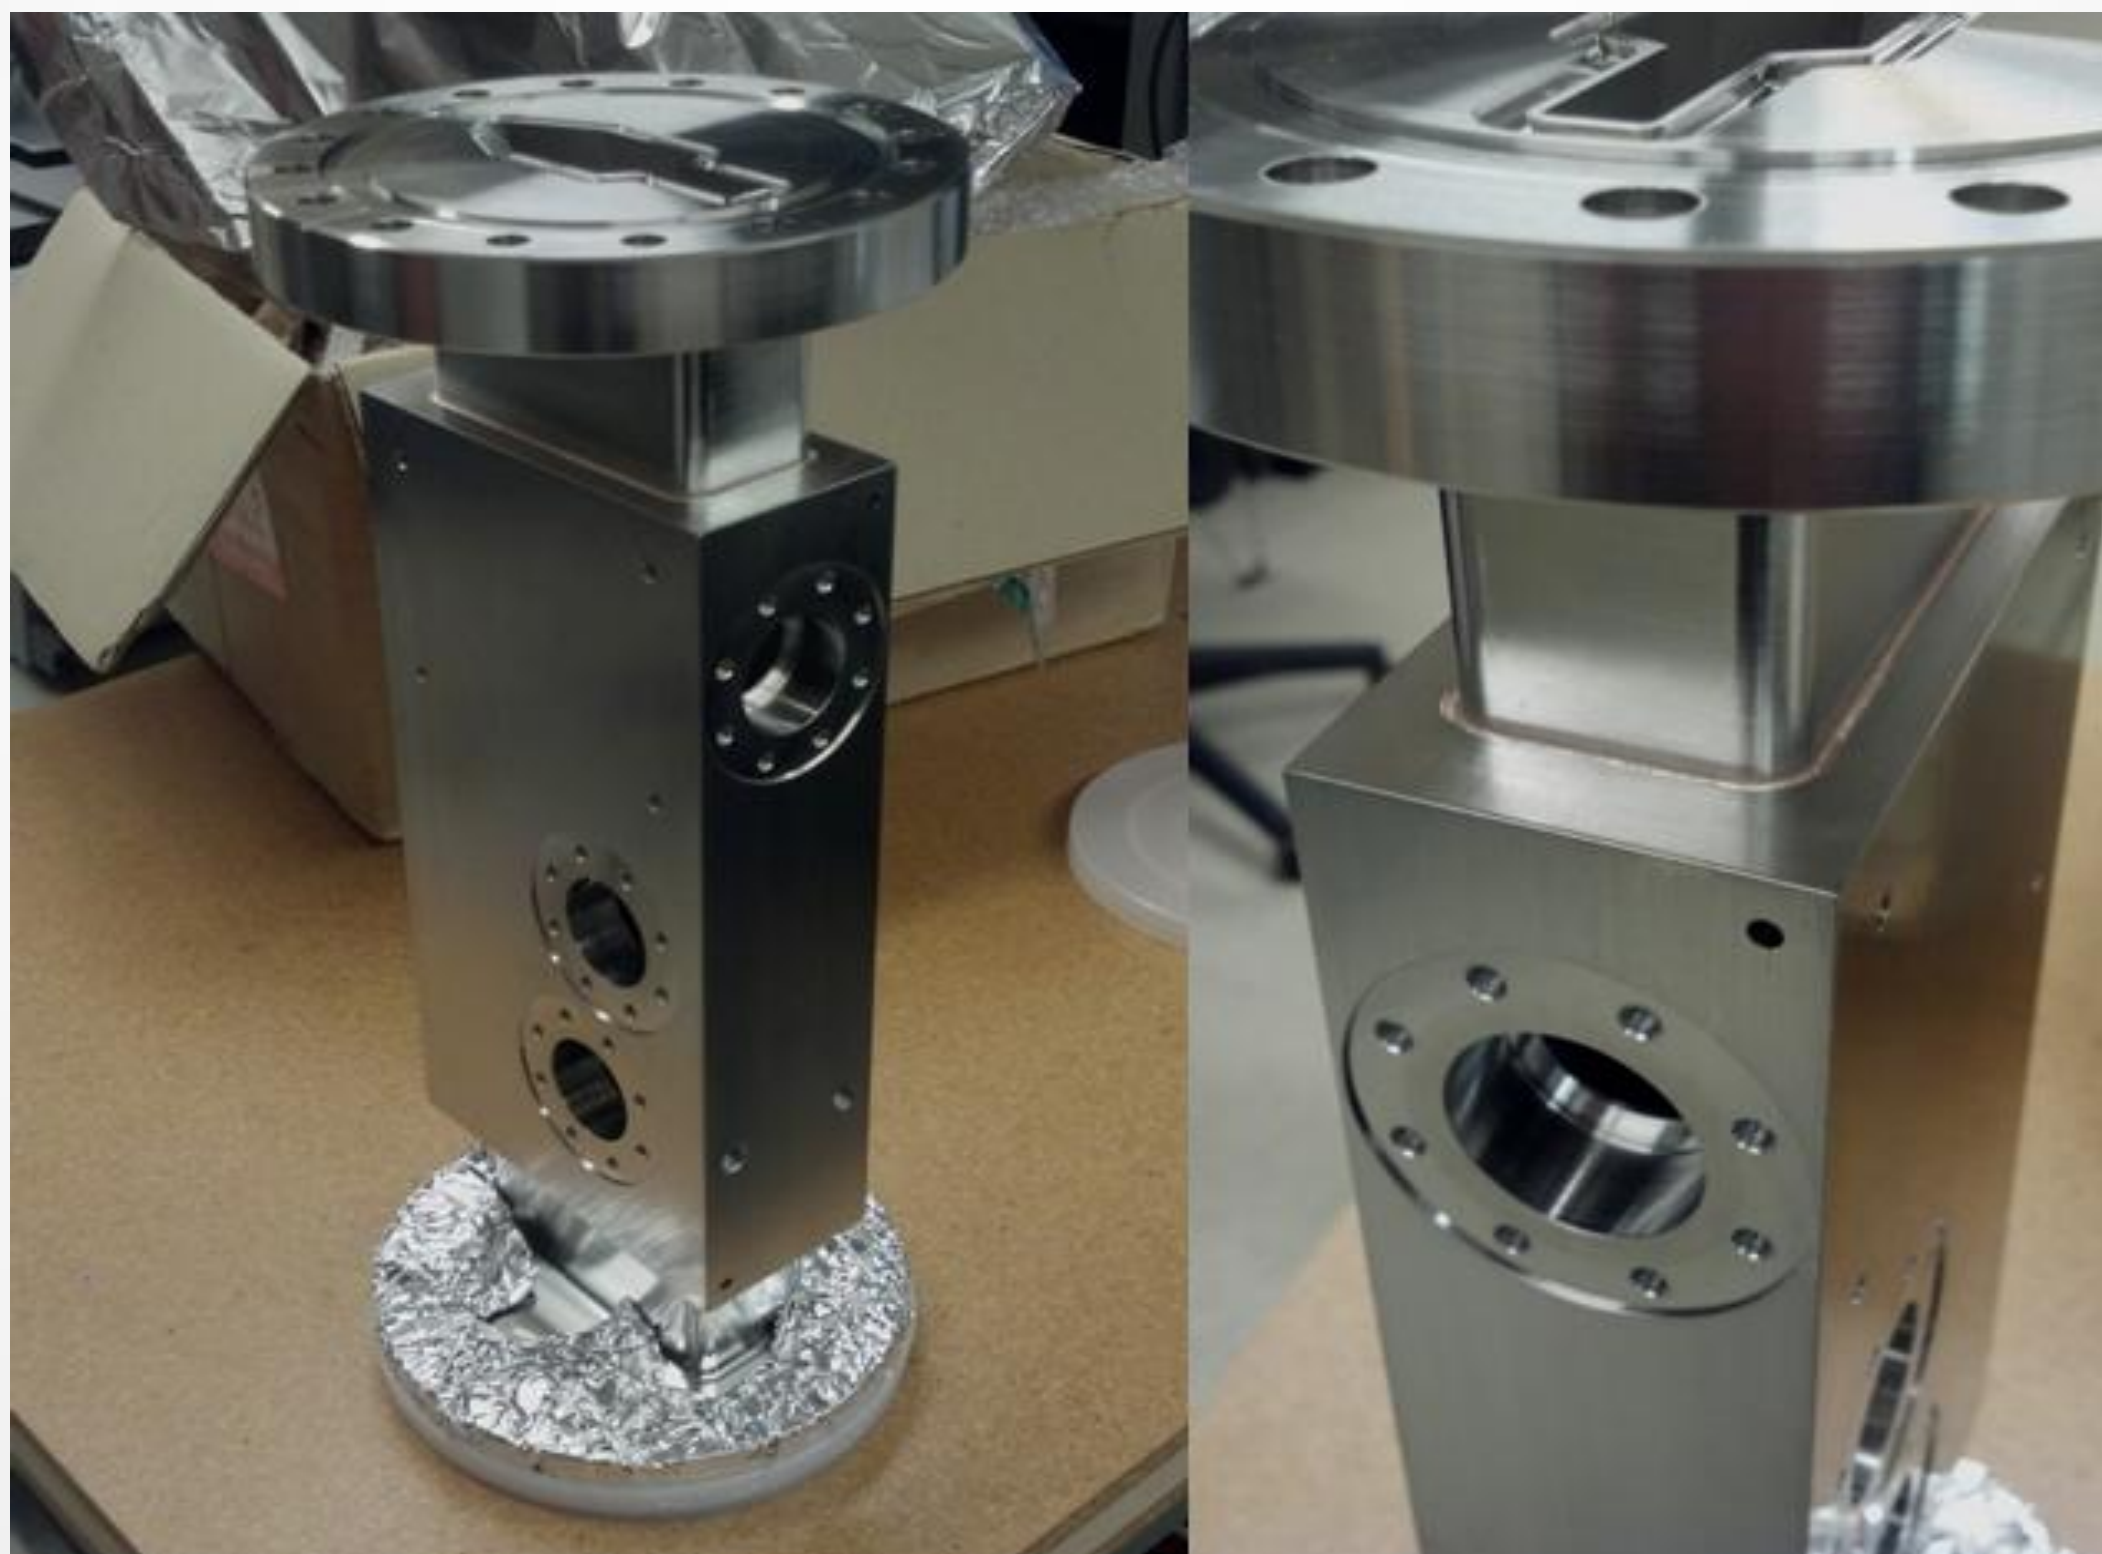


Figure 3: Successfully brazed flag chamber.

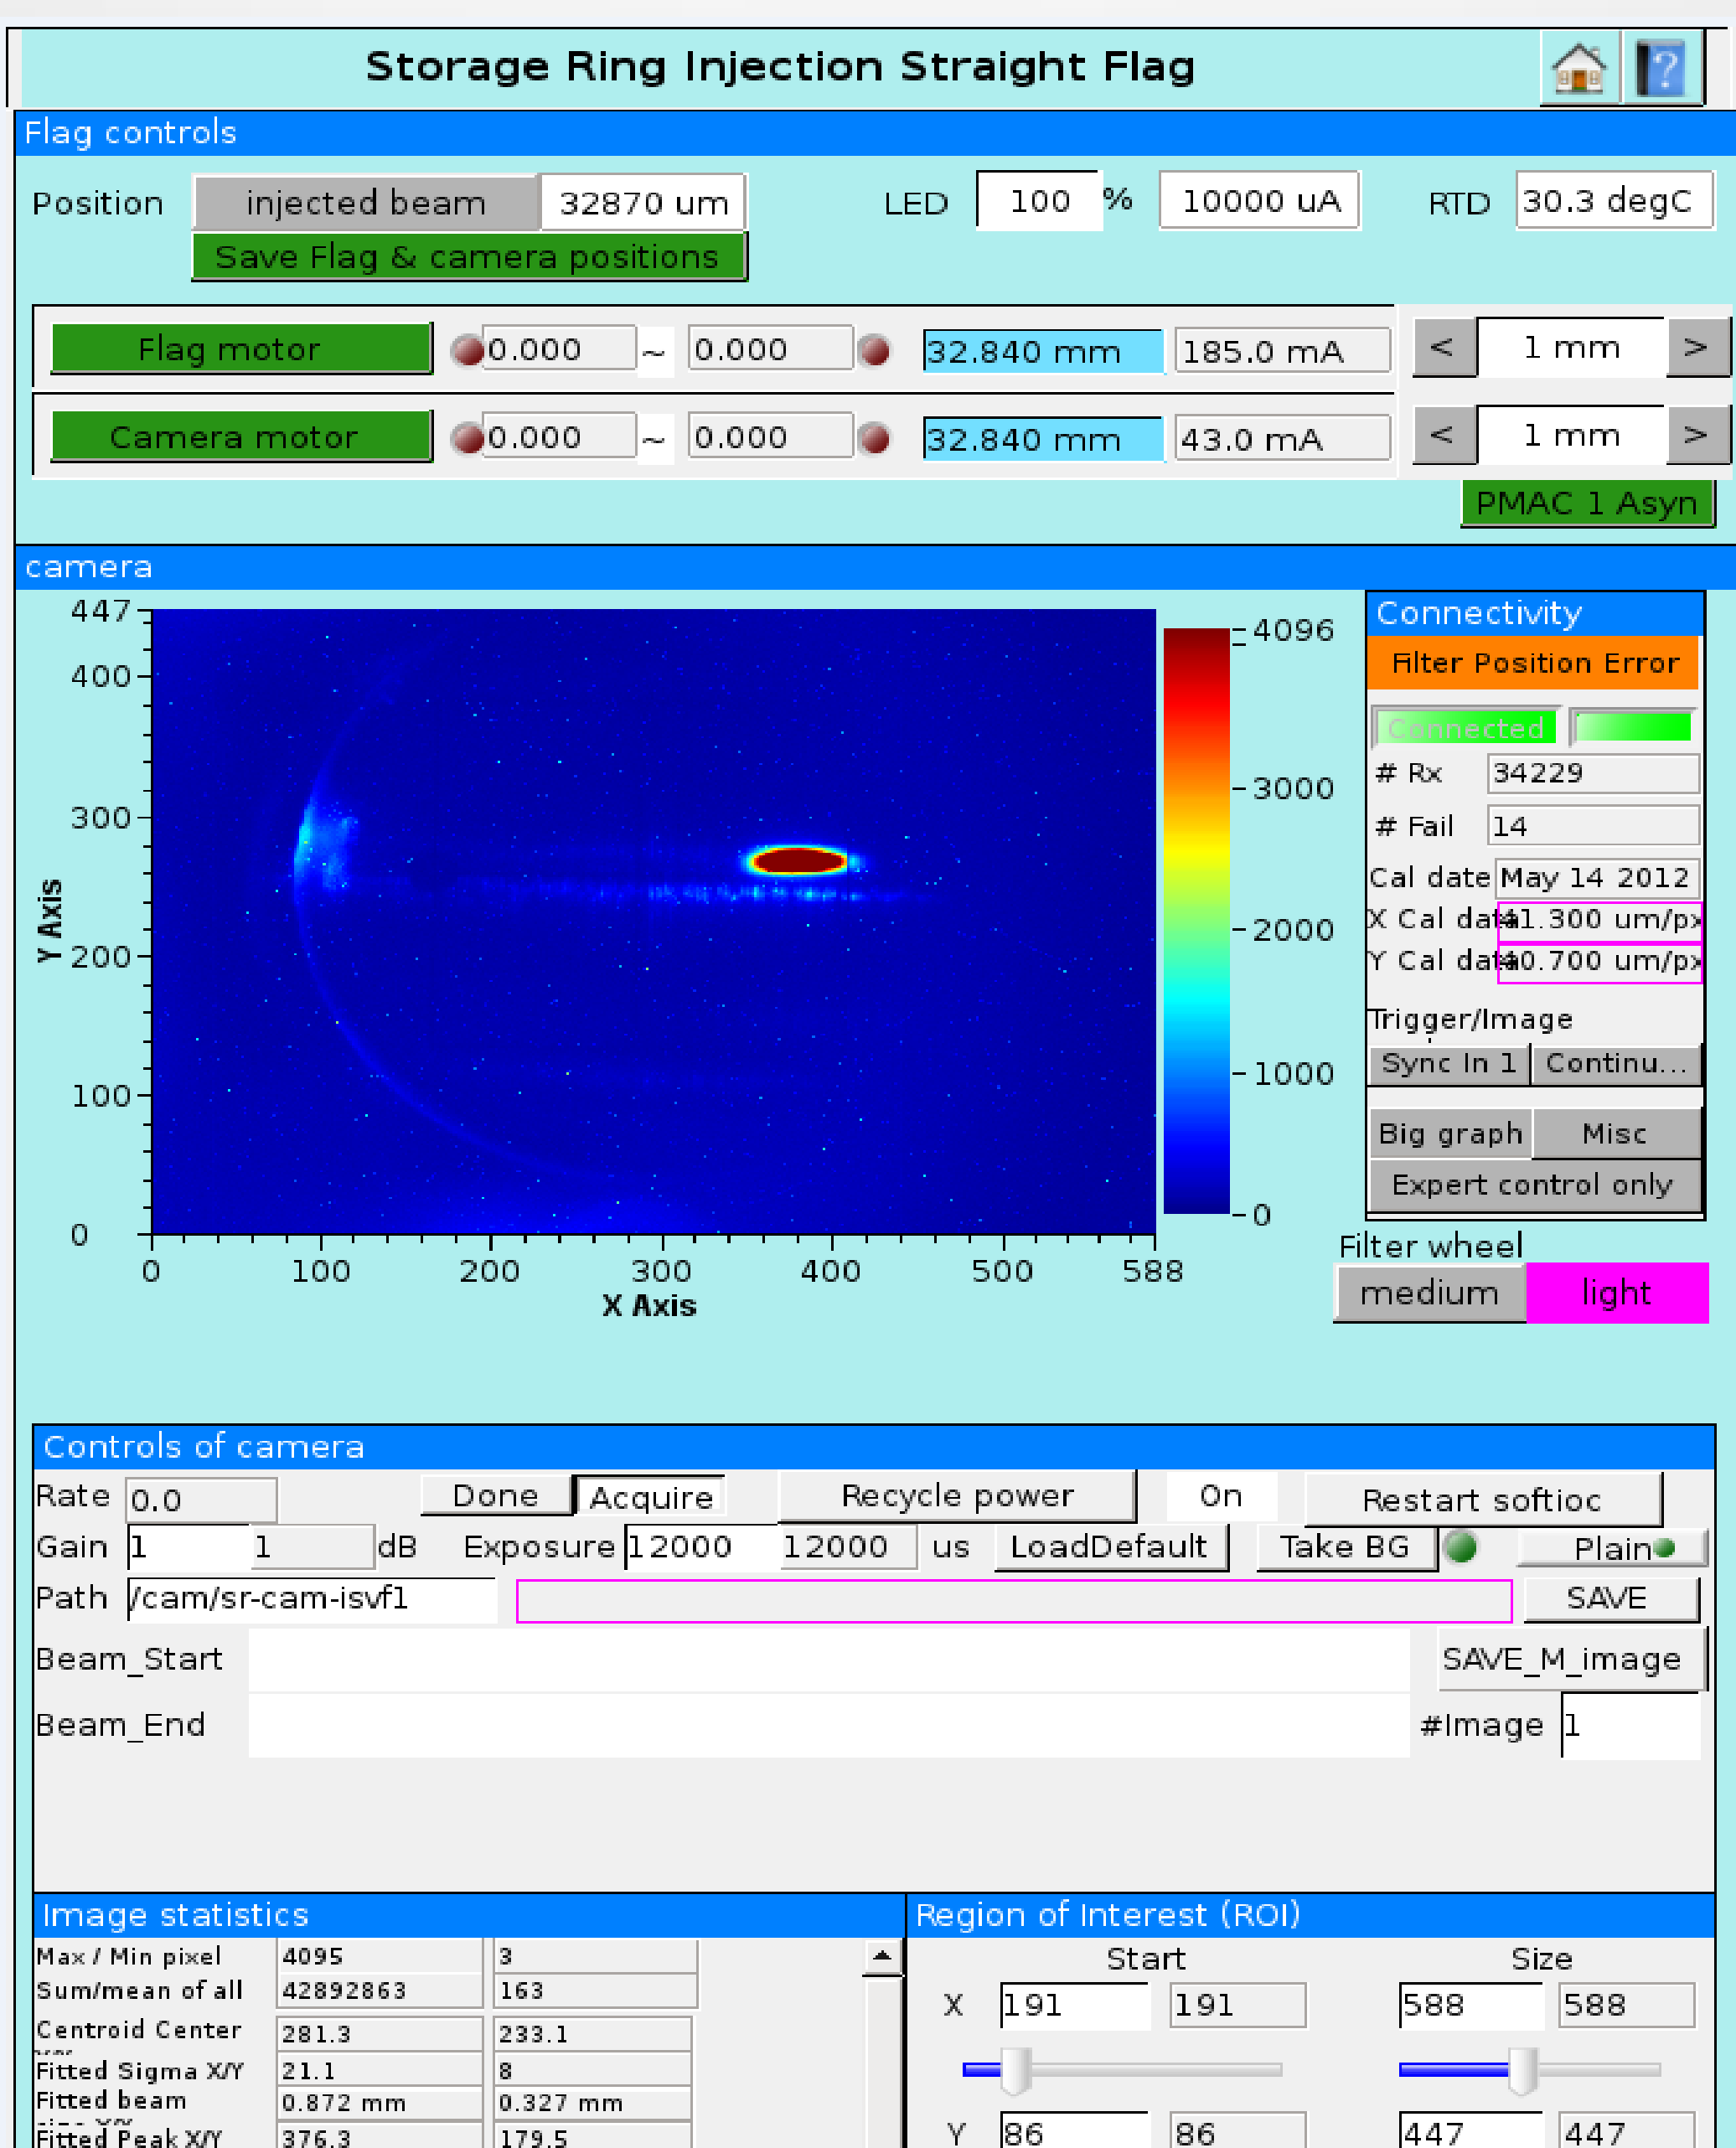


Figure 4: The interface control screen for the NSLS-II SR Flag showing and image of the injected beam.

## OPTICAL TRANSPORT ASSEMBLY

The optical transport for the flag is constructed primarily of commercial off-the-shelf components and has an optical path length of 900mm (Fig. 5). It consists of an LED illuminator coupled directly to a kinematic right angle mirror. A remotely controlled filter wheel is mounted to and extruded aluminium rail along with a CCD and lens mounted atop a 100mm focusing stage. The focusing stage is a critical element in the optical assembly due to the fact that the YAG screen is dynamic and can be positioned anywhere within the 75mm range of the chamber aperture. The control system is programmed so the focusing stage follows the linear actuator that controls the screen position. The entire optical transport was pre-assembled remotely and then installed, aligned and tested in-situ.

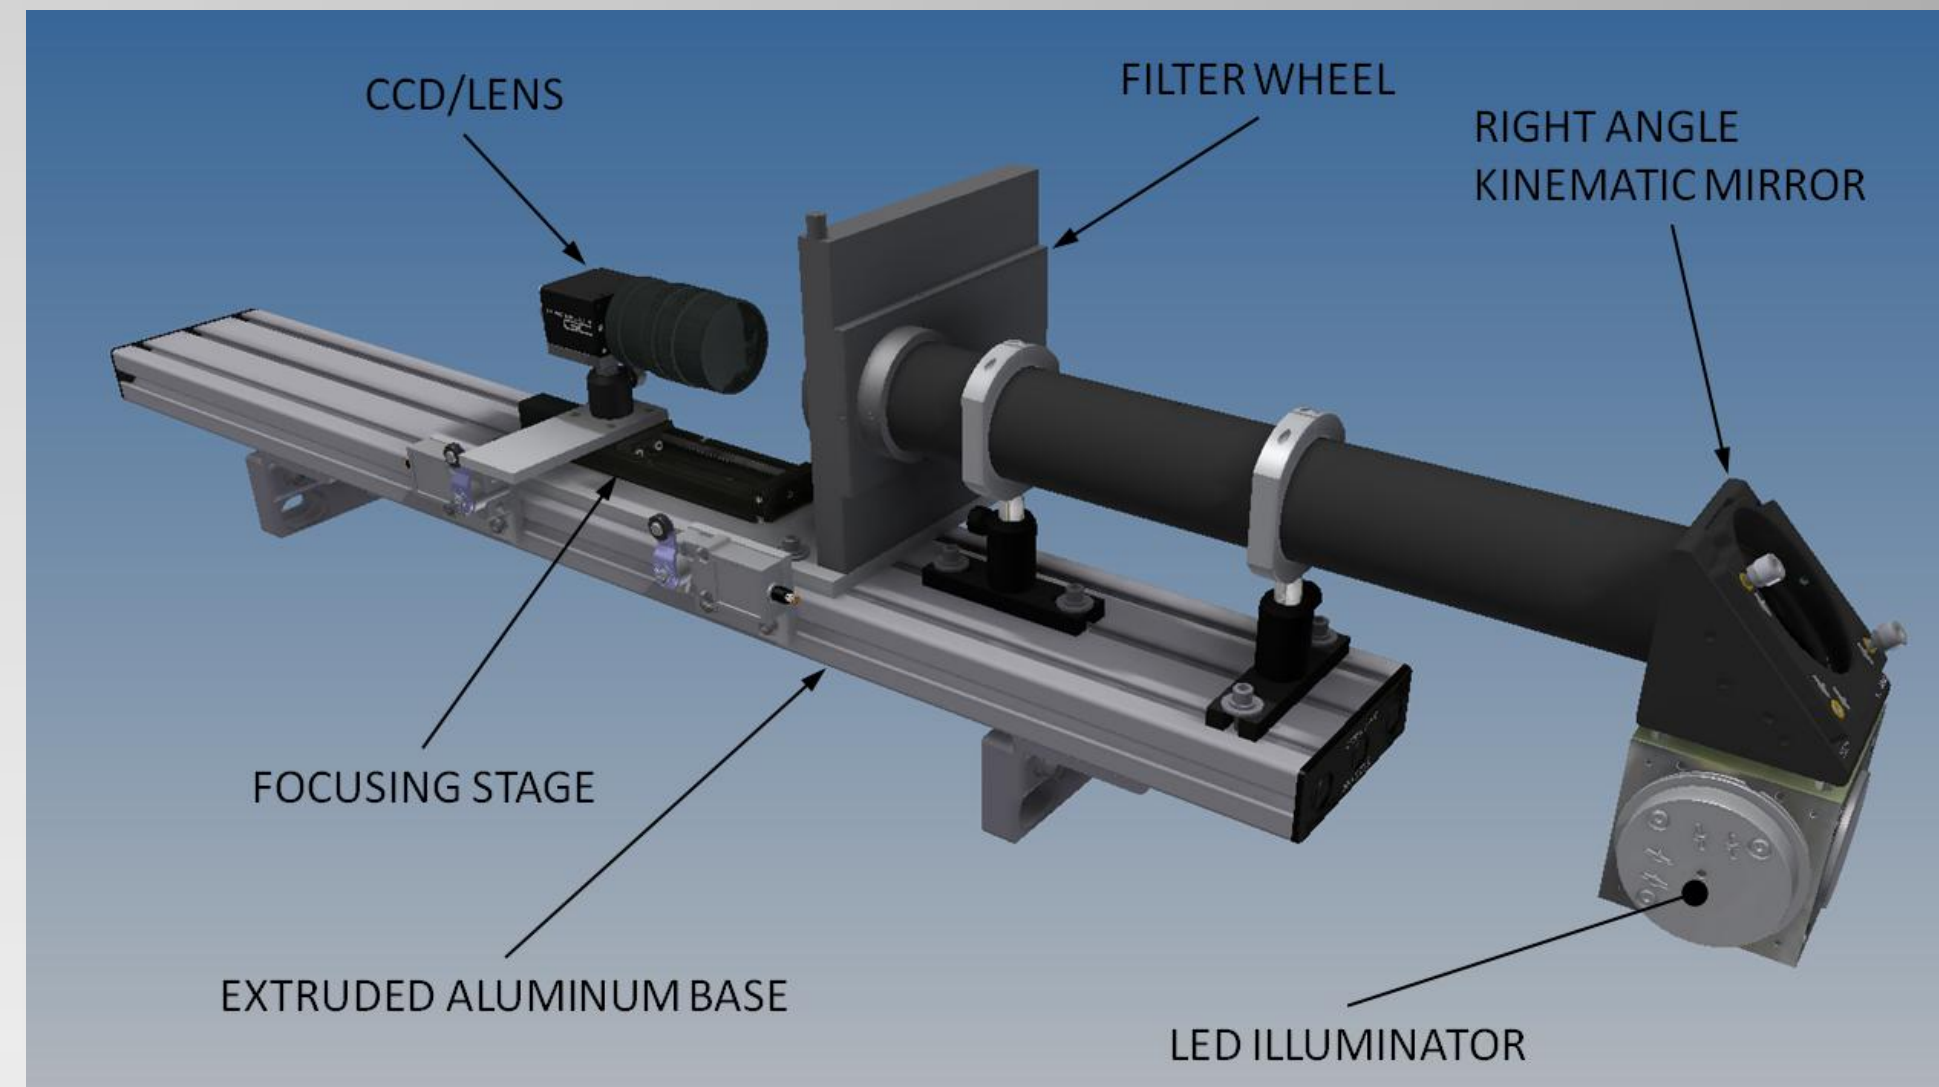


Figure 5: Details of the NSLS-II SR Flag optical transport.

## INSTALLATION

Installation within the injection straight took place in stages. The flag itself was installed and vacuum connections made between the upstream septum chamber and the downstream bellows. The system was then leak checked and a bake-out was performed to insure the vacuum satisfied NSLS-II specifications. The optical transport was then installed, aligned and tested followed by the installation of semi-rigid SiO<sub>2</sub> coaxial BPM cables (Fig.6).



Figure 6: The final configuration of the NSLS-II SR Flag.

## COMMISSIONING

The horizontally adjustable flag proved very useful during the commissioning phase of injection. The position and beam cross section were easily obtained using this device. Fig. 4 shows the CSS (Control Systems Studio) screen used to interface with the flag. The Flag Controls toolbar allow the user to move the screen to one of three pre-programmed positions corresponding to the injected, bumped or single turn beam or an arbitrary position can be entered within the physical limits of the chamber. The Camera toolbar shows the image capture with X and Y calibration in terms of  $\mu$ m per pixel as well as filter wheel information.

## REFERENCES

- [1] B. Kosciuk, "Development of a Horizontally Adjustable Beam Profile Monitor for the NSLS-II Storage Ring", MEDSI-2012, Shanghai, May 2010
- [2] Crytur, [www.crytur.cz](http://www.crytur.cz)