



# **White Rabbit Based Beam-Synchronous Timing Systems for SHINE**

**Yingbing Yan**

**Shanghai Advanced Research Institute**

**Chinese Academy of Sciences**

**SHINE**


# Outline



- SHINE Project Overview
- SHINE Timing System
- Standard Clock Transmission
- Random Trigger Distribution
- RF Signals Distribution
- Non-Standard Clock Transmission
- Prototypes Development
- Performance Test
- Summary
- Acknowledgment

# SHINE Project

- Shanghai High Repetition-Rate XFEL and Extreme Light Facility (SHINE)
- First hard X-ray FEL facility in China

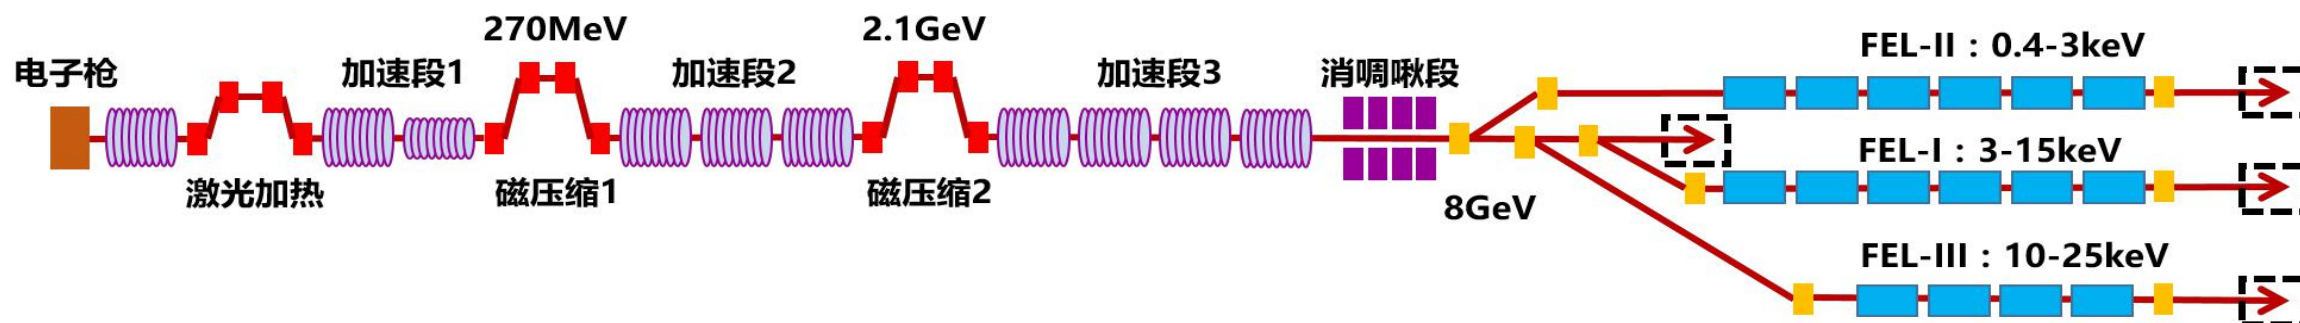

Beam energy : 8 GeV

Bunch charge : 100 pC


Total length : 3.1 km

Photon energy : 0.4 - 25 keV

Max repetition rate : 1.0030864 MHz



Underground : ~ 29m



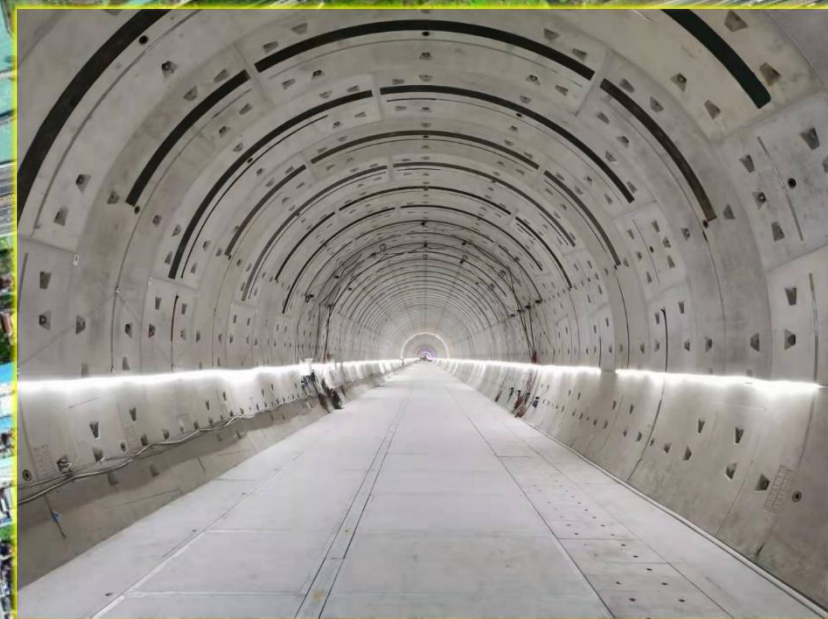



# SHINE Timing System

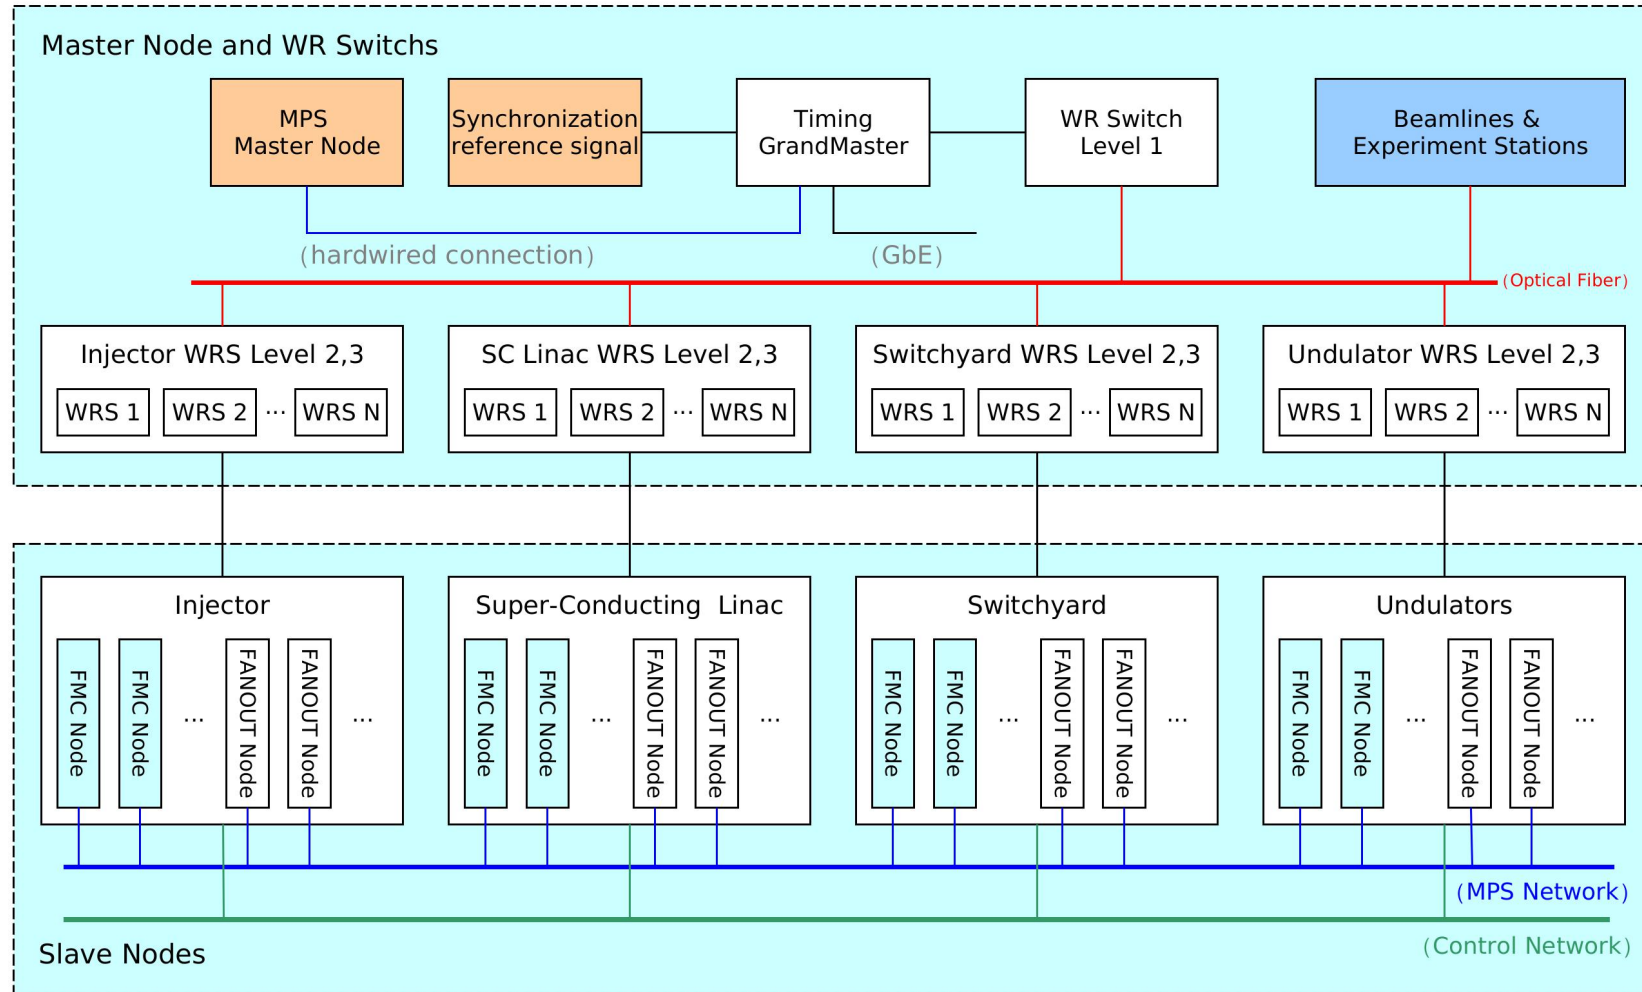

1 Master Node, ~ 800 Slave Nodes, 3 Layers ~ 80 WRS

# SHINE Timing System




- 1) Beam-synchronous trigger signal distribution
  - Precise distribution and synchronization of the 1.003086MHz (1.3GHz/1296) timing signals over a long distance of about 3.1 km
- 2) Random-event trigger signal distribution
  - Extension function of the timing system
  - Various event signals, such as beam loss, machine snapshot, etc.
- 3) Data exchange between nodes
  - May be used for local beam parameter feedback

high priority




# White Rabbit Technology

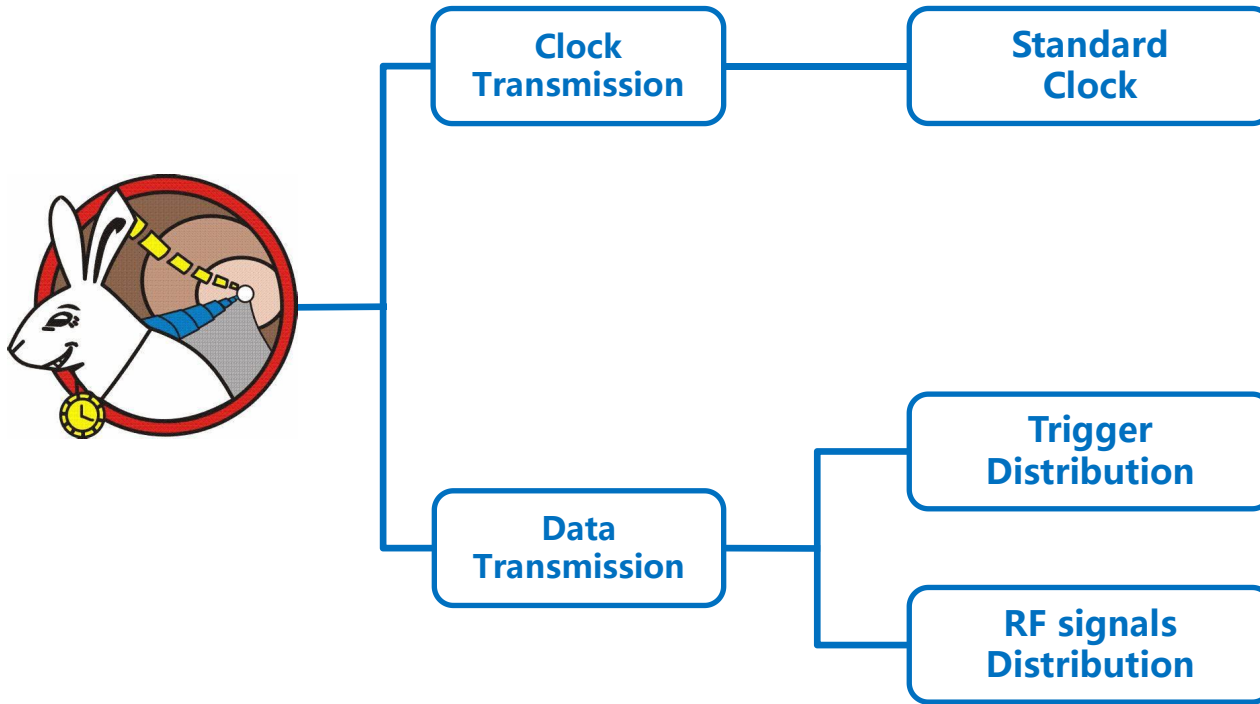

# Standard Clock Transmission


- Standard White Rabbit network operating clock 125/62.5MHz
- If the SHINE repetition frequency is 1.0MHz, 1.3GHz can be divided to 10MHz as the reference signal
- The slave node output the trigger signal at the specified time (1us, 2us, 3us, ...)

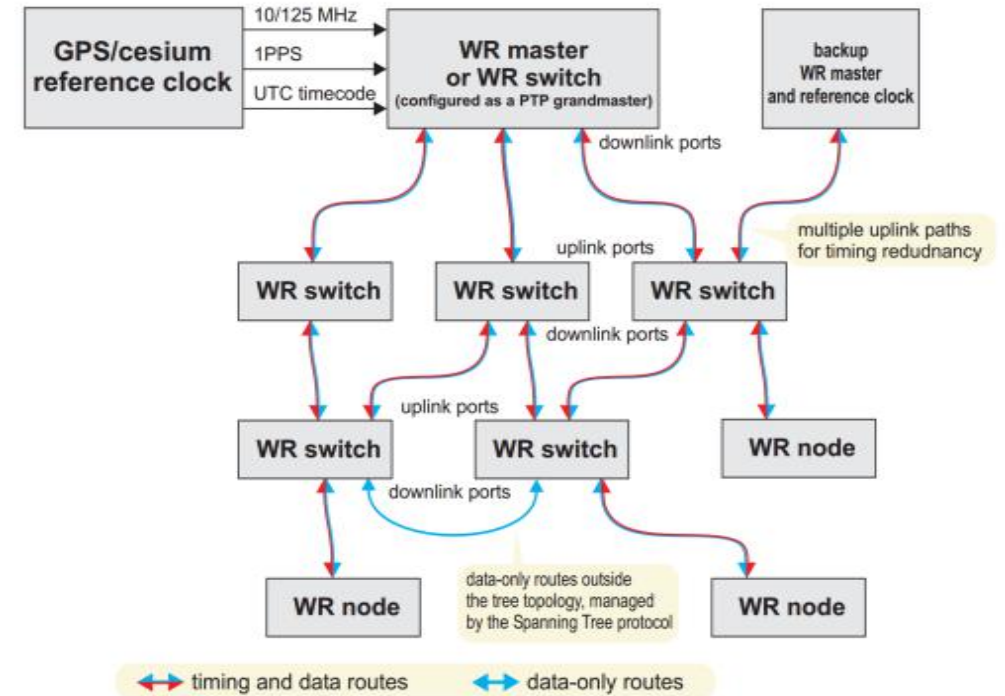




# Random Trigger Distribution

- White Rabbit Trigger Distribution (WRTD) is a generic framework for distributing triggers (events) between nodes over a White Rabbit network
- For SHINE, the network bandwidth is limited, the jitter will increase
- 10 Gigabit White Rabbit switch, no commercial product


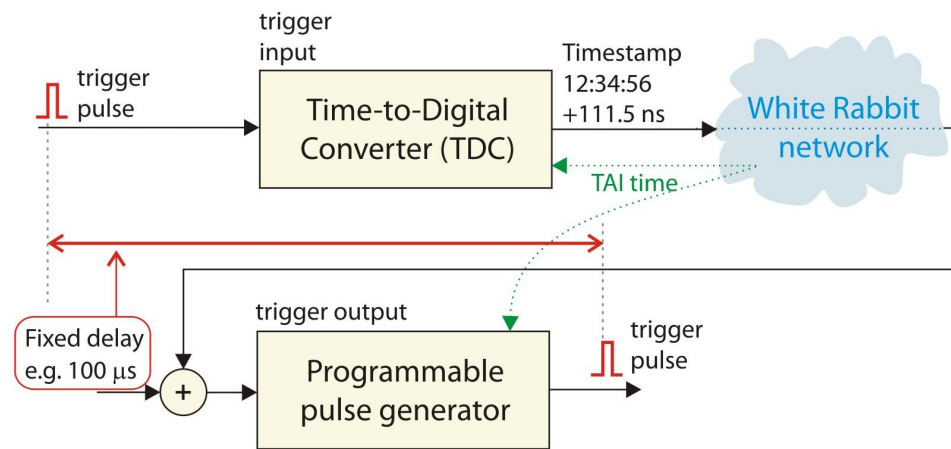


White Rabbit Trigger Distribution, ICALEPCS 2017

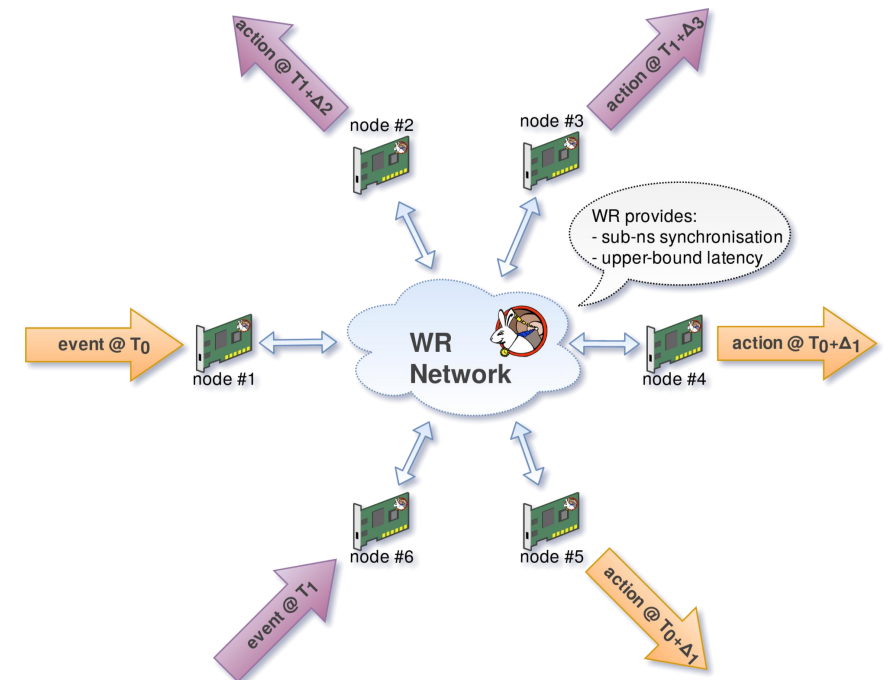

# Random Trigger Distribution

- SXFEL-UF (Shanghai soft X-ray Free-Electron Laser User Facility)
- SVEC - VME with FMC TDC 1ns 5cha and FMC DEL 1ns 4cha

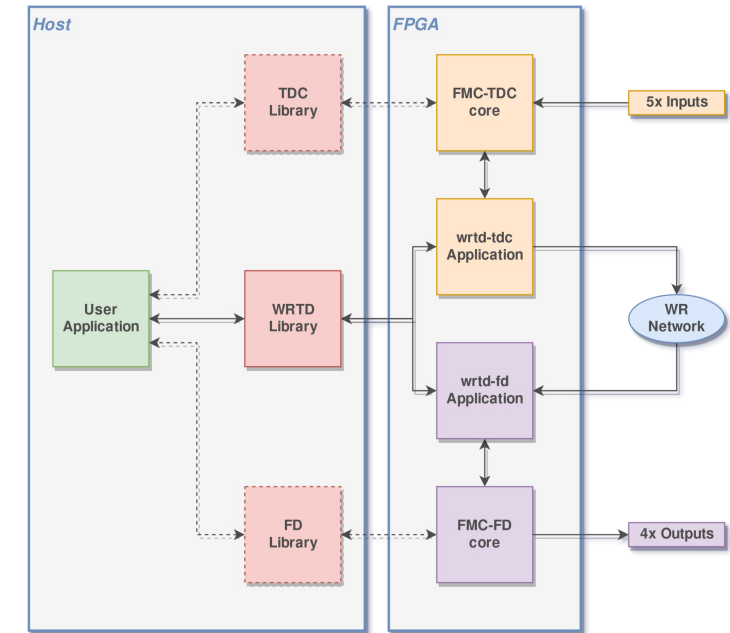
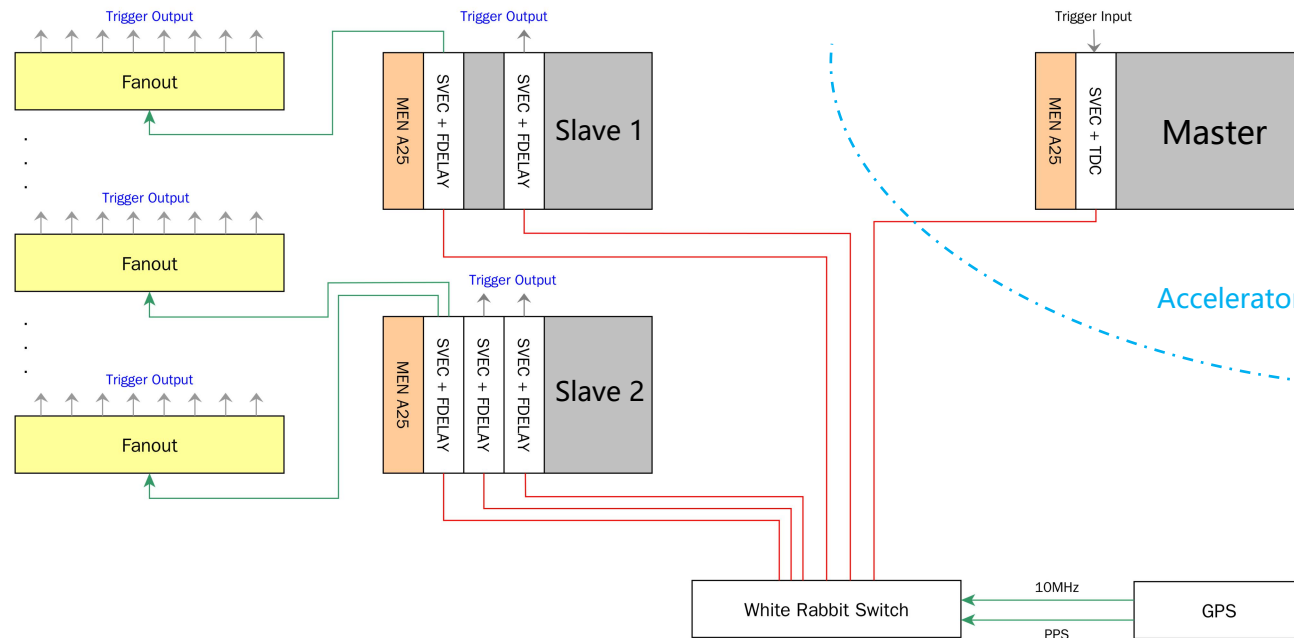


[https://wrt.readthedocs.io/en/latest/ref\\_svec\\_tdc\\_fd.html](https://wrt.readthedocs.io/en/latest/ref_svec_tdc_fd.html)

# RF Signals Distribution

- All nodes have the same reference frequency and time
- Master phase locks its DDS to the RF input
- Broadcast the DDS control words, including a TAI timestamp
- All receivers update their DDSes with the received control word at the same moment (+some fixed delay)


Can the sine be converted to editable and low jitter pulse signal ?

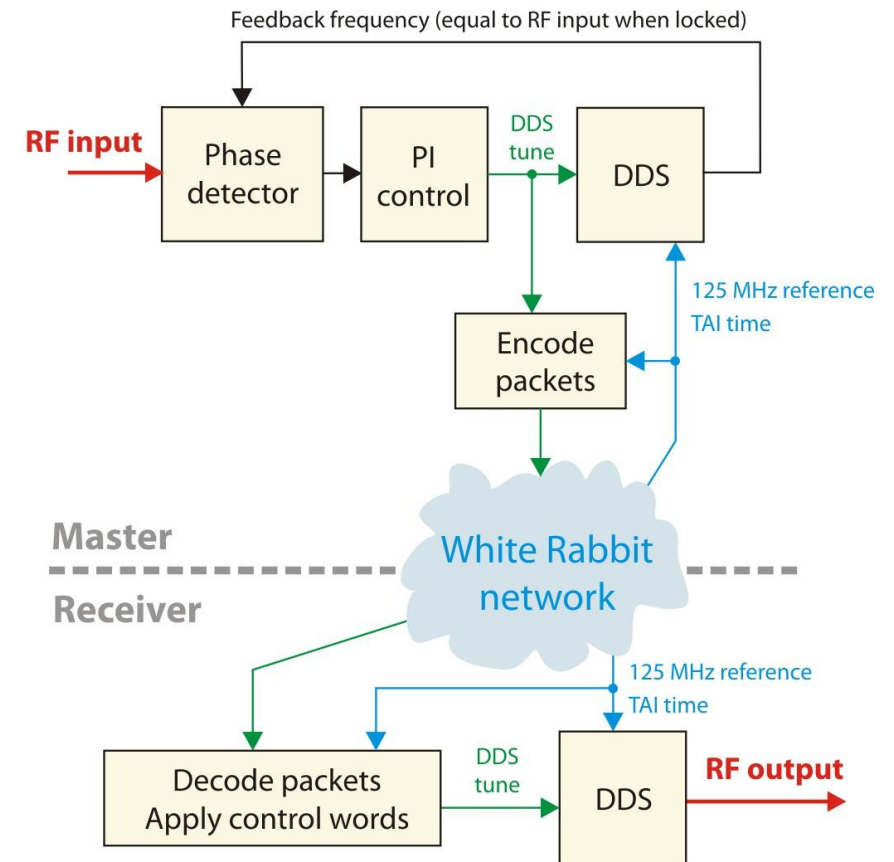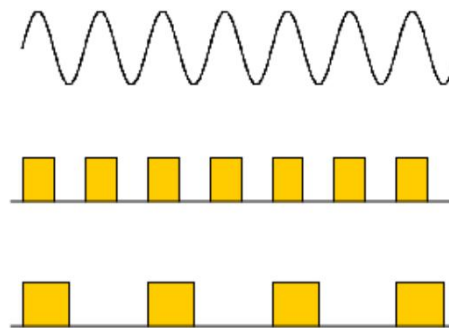

Distribution of RF signals using WR, ICALEPCS 2017




# White Rabbit Technology

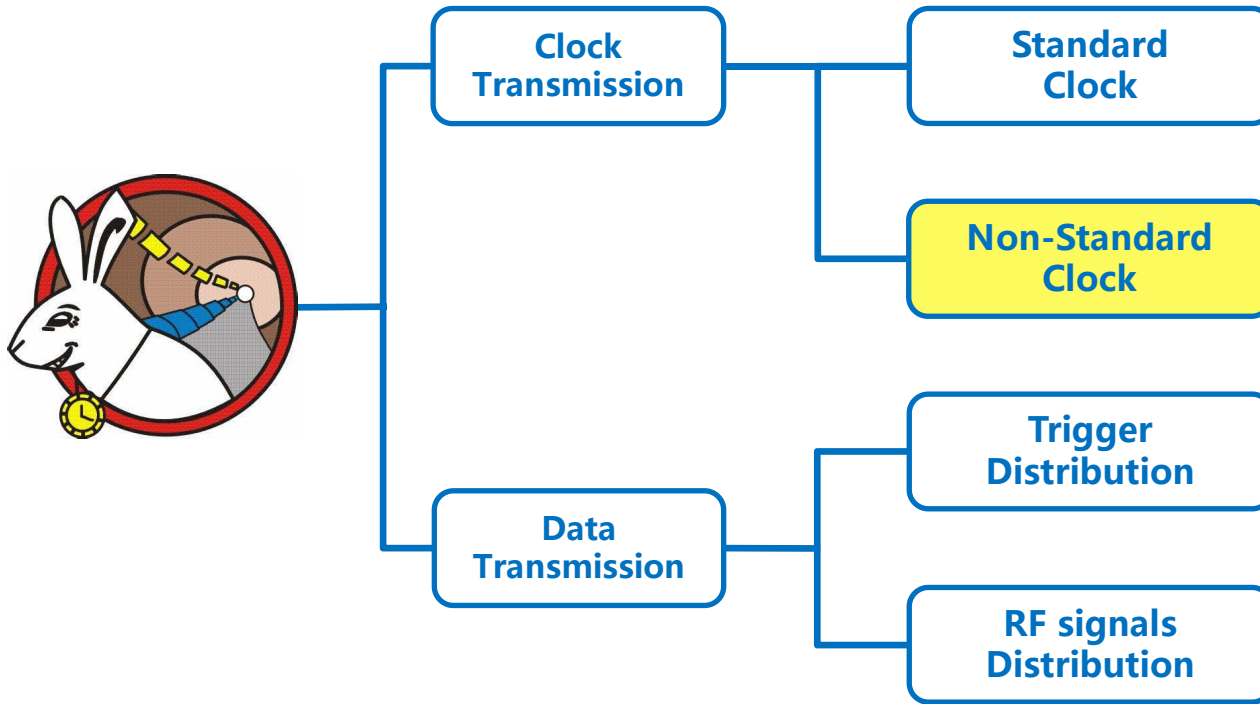


# Non-Standard Clock Transmission

- The repetition frequency of SHINE is 1.0030864MHz (1.3GHz/1296)
- 1.3GHz RF reference signal can be divided to 10.030864MHz as a reference signal

Can the White Rabbit network operating clock be changed from 125/62.5MHz to 125.385/62.693MHz?

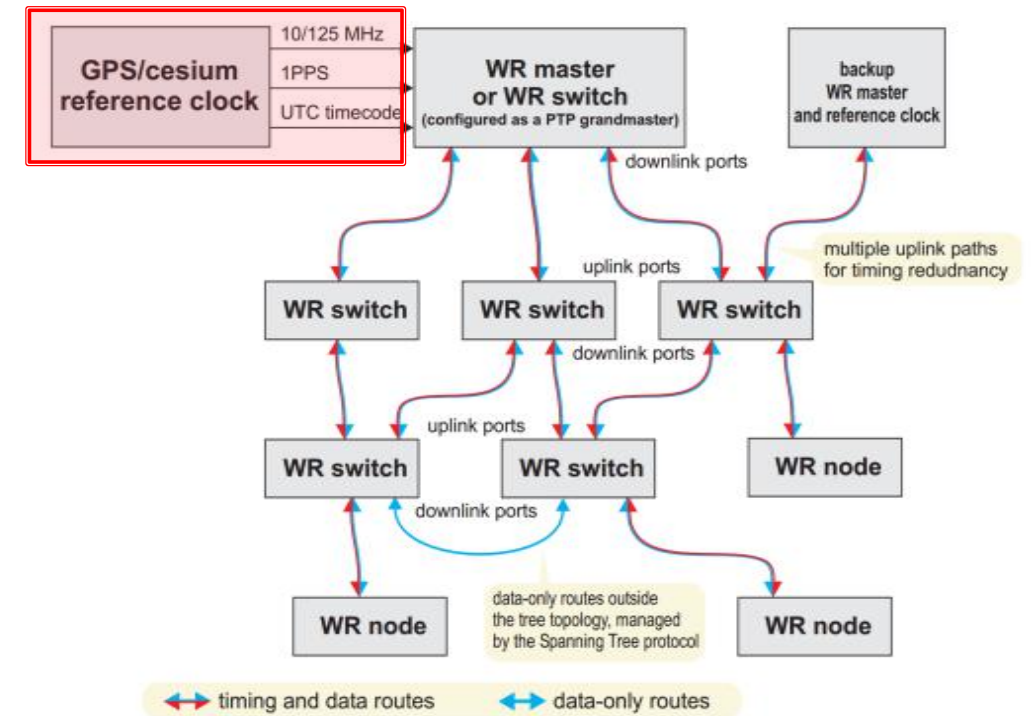


# SHINE Timing System

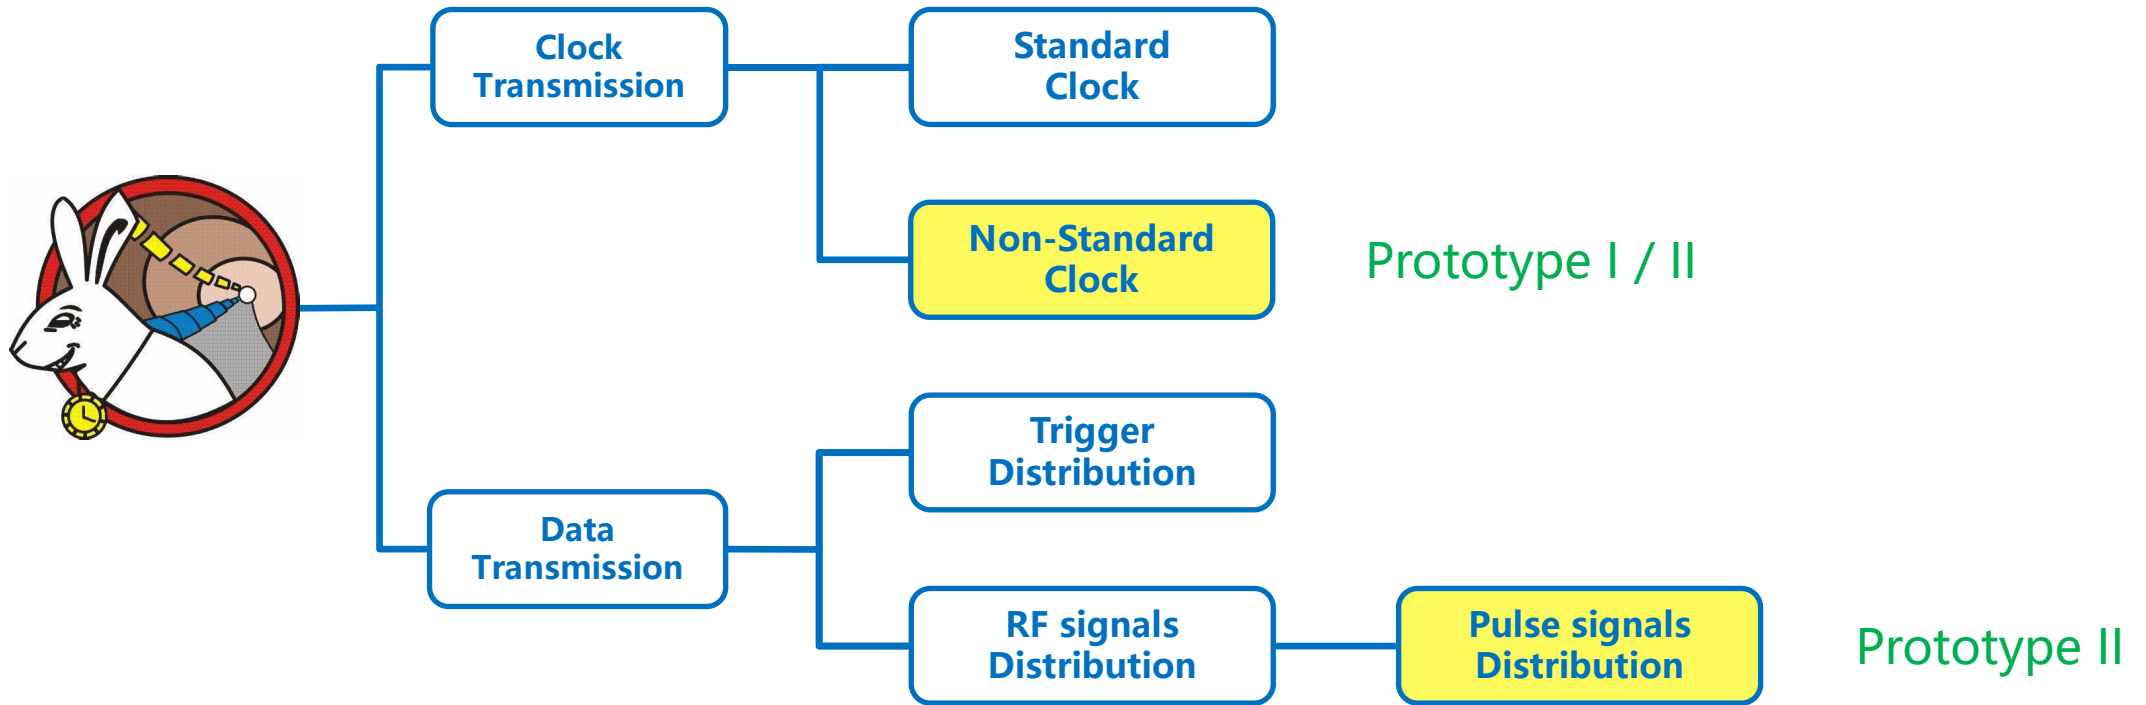




# SHINE Timing System

- 1) Beam-synchronous trigger signal distribution
  - Non-standard clock or pulse signals distribution
  - Master node : reference signal and PPS signal
  - Slave node : adjustable delay and pulse width
- 2) Random-event trigger signal distribution
  - Standard White Rabbit Trigger Distribution (WRTD)
  - Master node : 4 channels pulse inputs < 1 kHz
  - All slave nodes output at the same time ( + fixed delay )
- 3) Data exchange between nodes

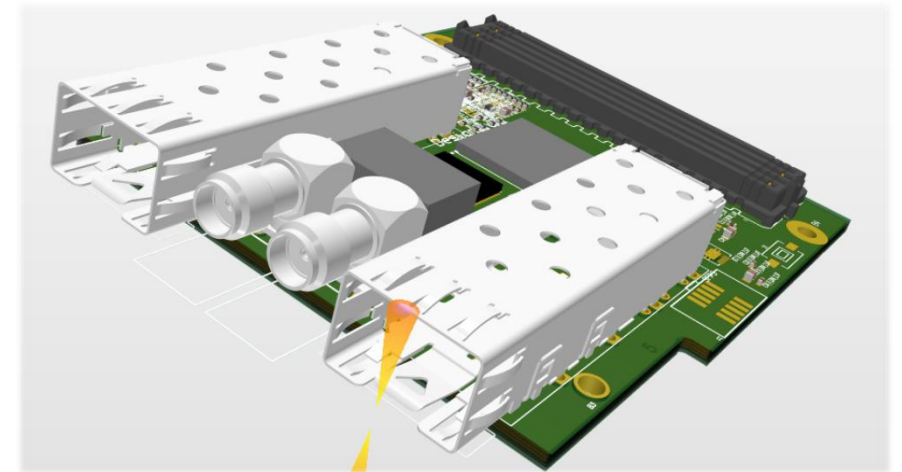

Slave node (FMC)

# SHINE Timing System

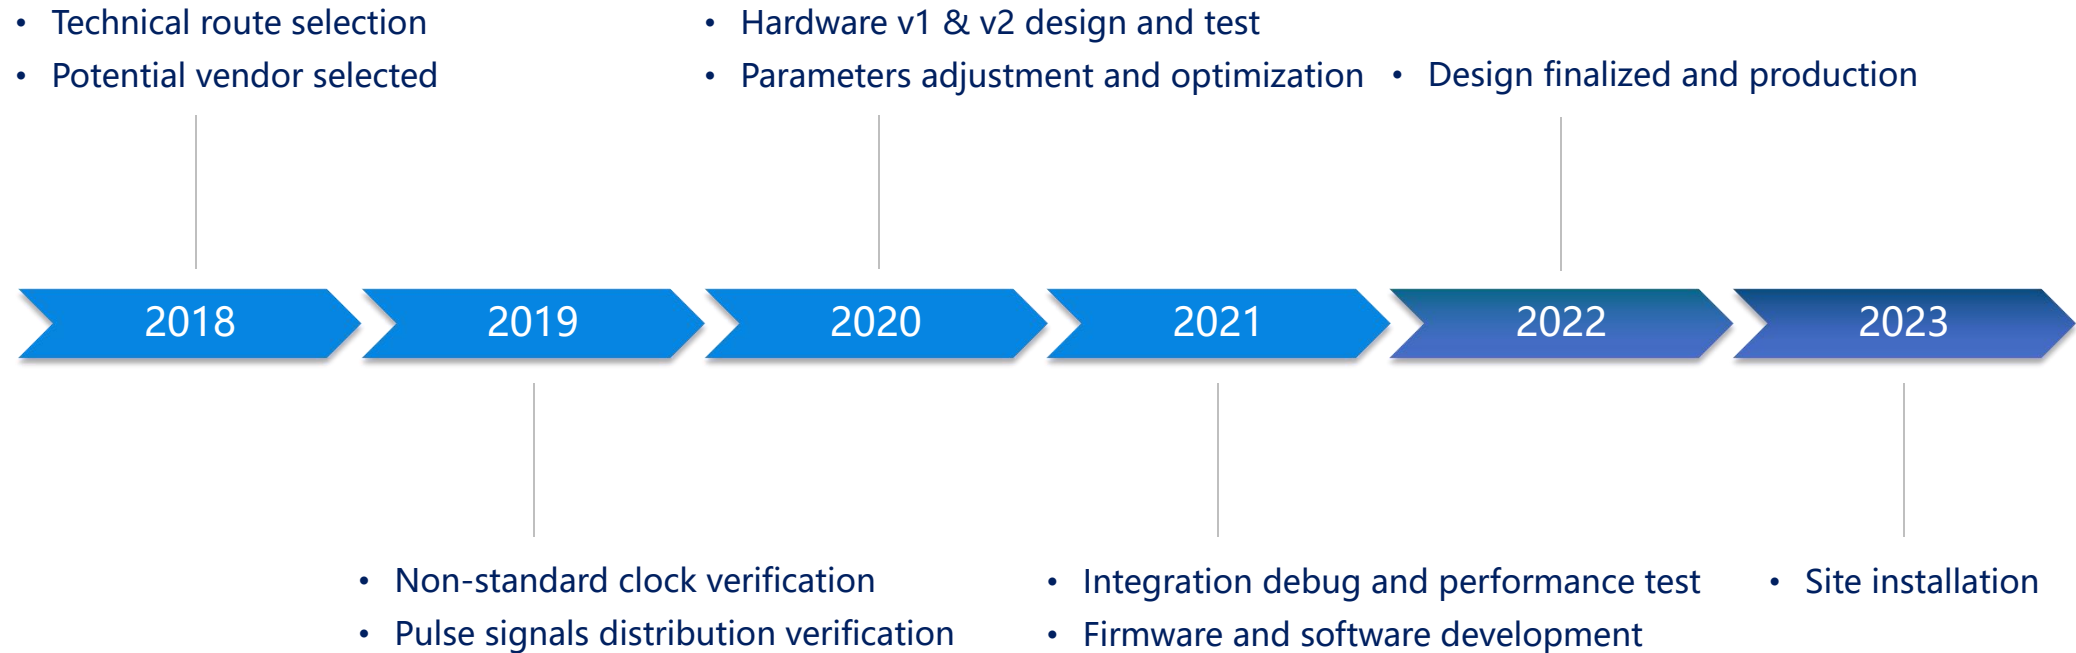

# Prototype I (Non-Standard Clock)


- Minimize modifications to the standard White Rabbit Protocol
- Replace the VCXO using customed 27.083MHz oscillator
- Operating frequency is 67.708MHz ( $1.003086\text{MHz} \times 135/2$ )
- Change the frequency to 64.197530MHz ( $1.0030864\text{MHz} \times 64, 52/81 \times 25\text{MHz} \times 4$ )
- Easy to generate  $2^N$  divisions and obtain beam-synchronous clocks
- Clear proportional relationship between the pseudosecond and the standard second

Standard time : [ seconds : nanoseconds : subnanoseconds ]


Non-standard time : [ pseudo-seconds ( $\sim 0.9969\text{s}$ ) : clock integer period ( $\sim 15.5769\text{ns}$ ) : phase ]




# Prototype I (Non-Standard Clock)

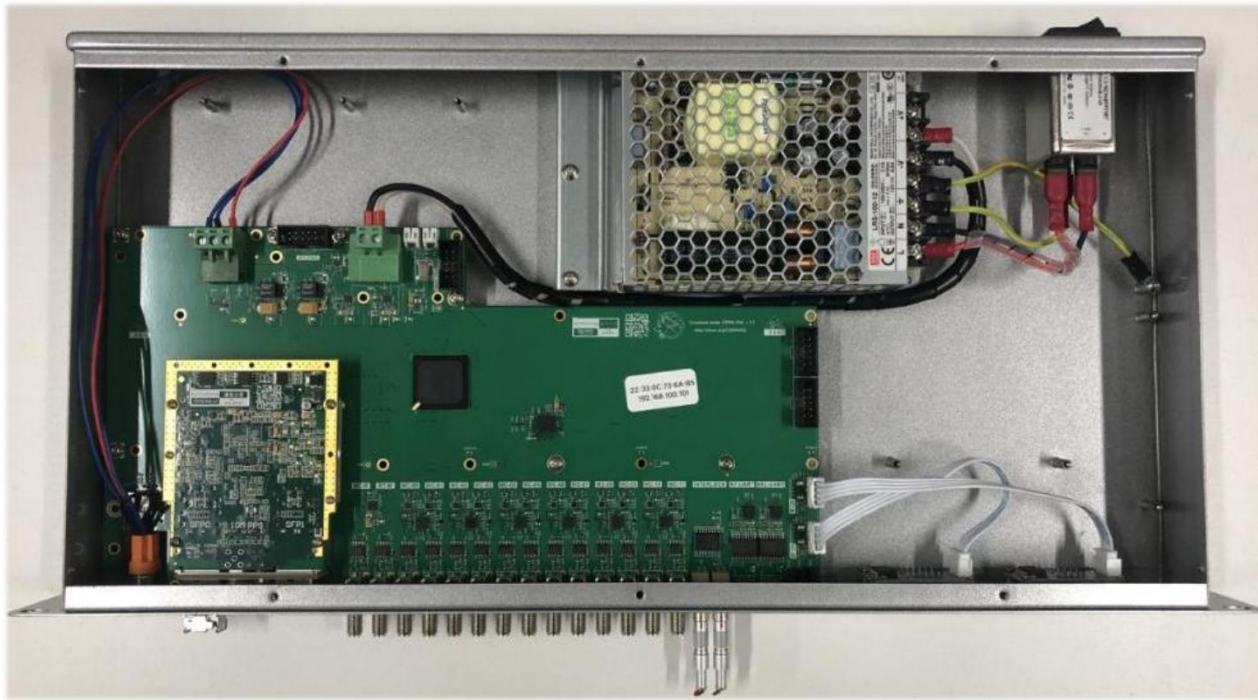

Salve Node Crate

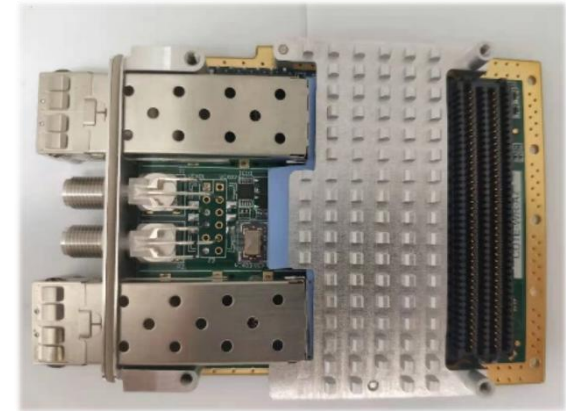

FMC LPC, ANSI/VITA 57.1-2019

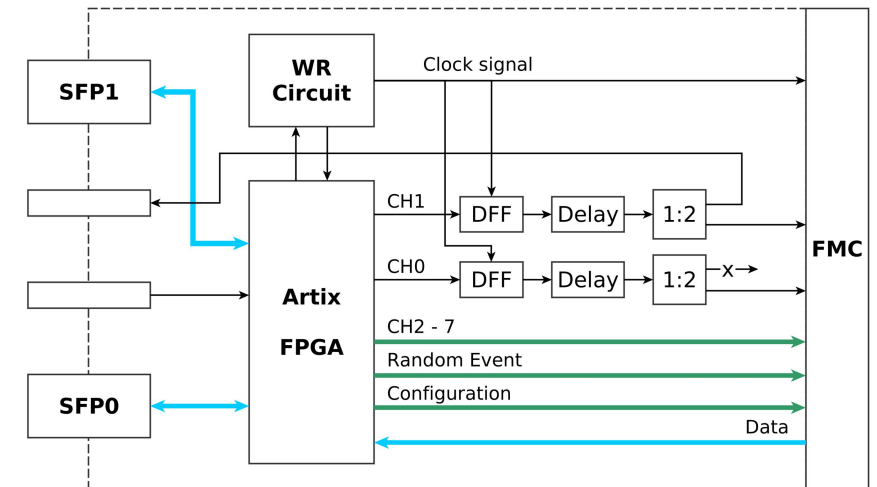


# Prototype I (Non-Standard Clock)



- GPS-Disciplined Rubidium Clock, MT6000-XPRO
- Digital Delay/Pulse Generator, DG645
- Tektronix Arbitrary Function Generator, AFG31252, 2-Ch 250MHz Bandwidth, 2GSa/s sample rate, Rise/fall time  $\leq 2$  ns, Jitter (rms) 2.5ps
- Keysight MSOS604A Oscilloscope, Infiniium S Series, 6 GHz Bandwidth, 20GSa/s sample rate, 10bits
- Siglent SDS6204 Oscilloscope, 2 GHz Bandwidth, 10GSa/s sample rate, 12bits
- Keysight Frequency Counter/Timer, 53230A


# Prototype I (Non-Standard Clock)

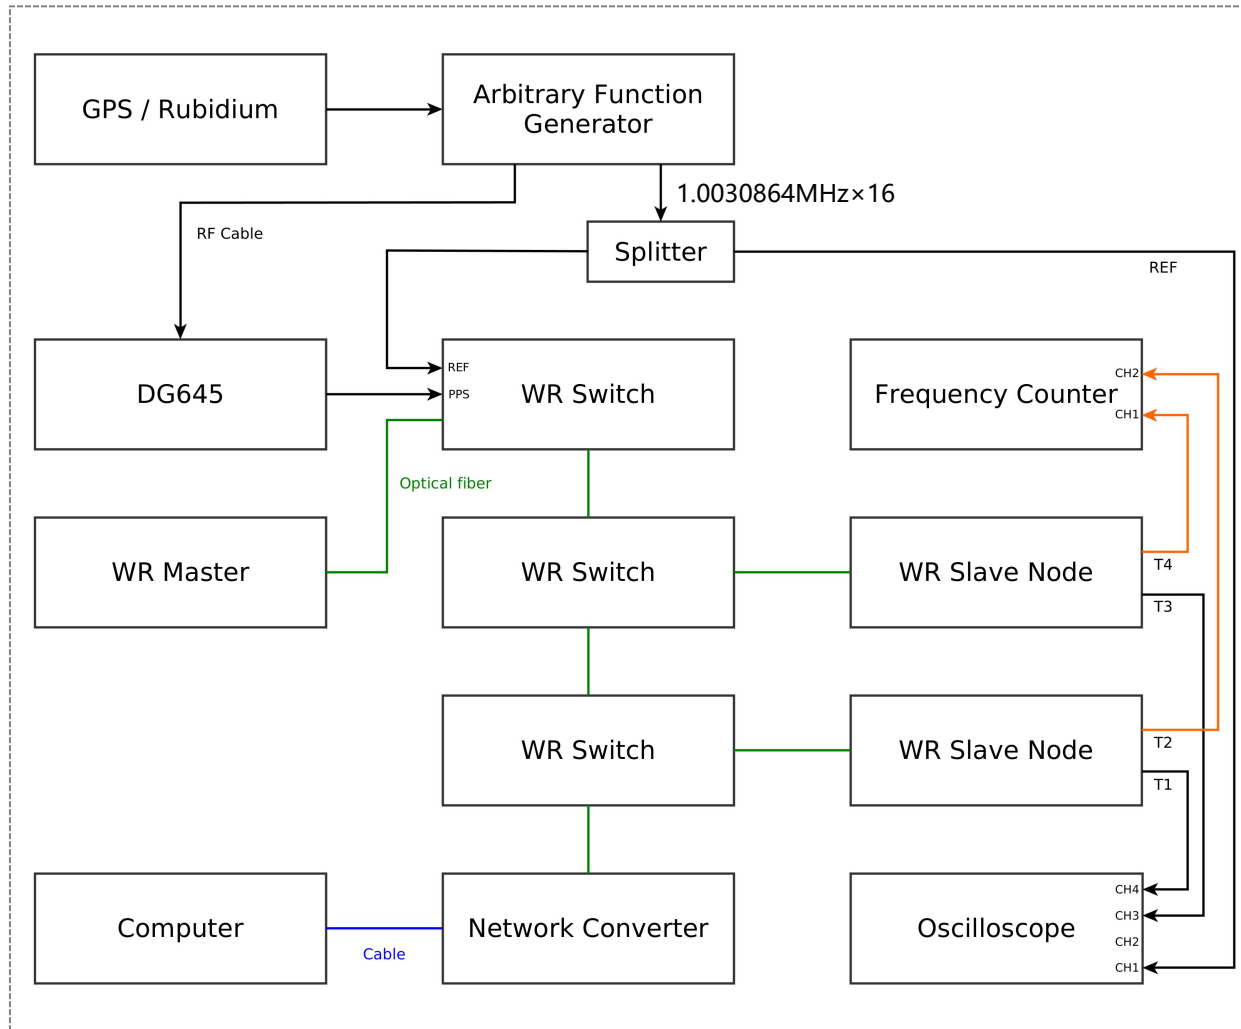

- GPS-Disciplined Rubidium Clock, MT6000-XPRO
- Digital Delay/Pulse Generator, DG645
- Tektronix Arbitrary Function Generator, AFG31252, 2-Ch 250MHz Bandwidth, 2G Sa/s sample rate, Rise/fall time  $\leq 2$  ns, Jitter (rms) 2.5ps
- Keysight MSOS604A Oscilloscope, Infiniium S Series, 6 GHz Bandwidth, 20G Sa/s sample rate, 10bits
- Siglent SDS6204 Oscilloscope, 2 GHz Bandwidth, 10G Sa/s sample rate, 12bits
- Keysight Frequency Counter/Timer, 53230A



# Prototype I (Non-Standard Clock)

- Beam-synchronous trigger signal distribution
  - Jitter between the slave node output and reference signal <10ps
  - Jitter between slave nodes outputs <5ps
- Random-event trigger signal distribution
  - Jitter between the slave node output and input trigger <60ps

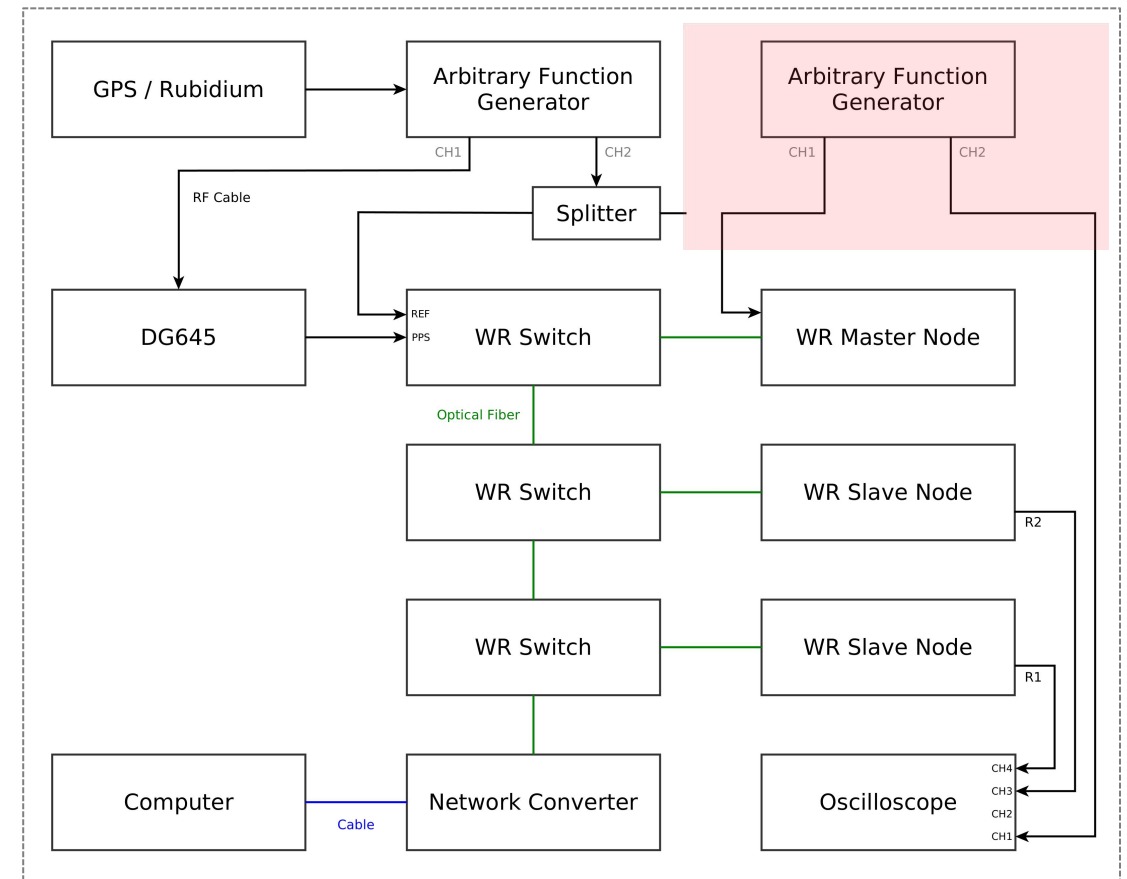

# Prototype I (Non-Standard Clock)


- The sine signal is better as the reference signal, but it is difficult to measure the jitter.
- There is jitter between the square wave cycles, which affects the system performance.

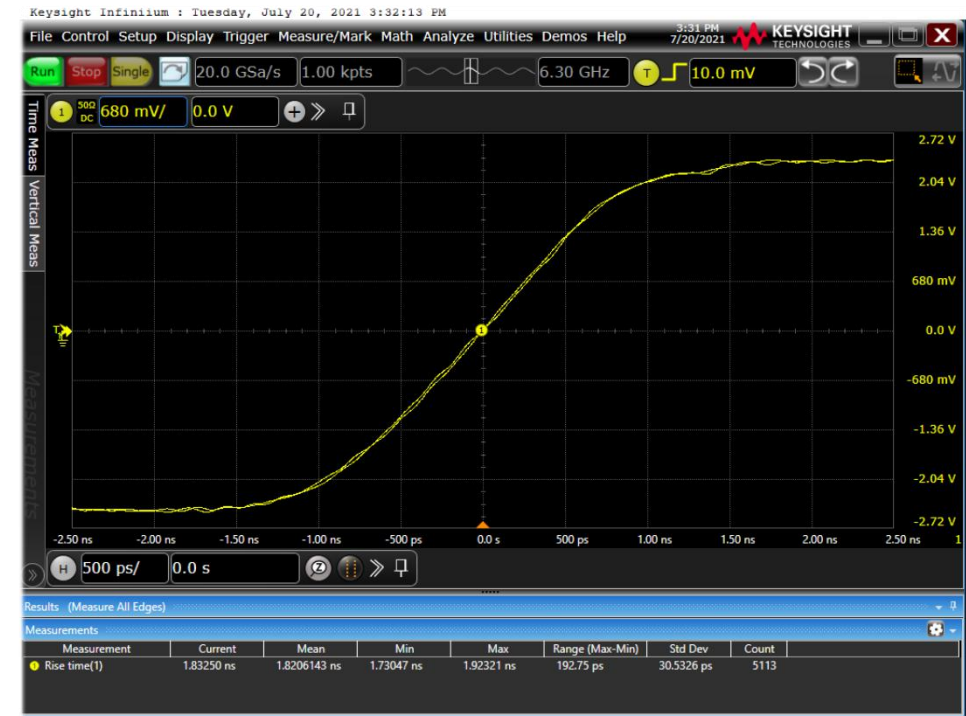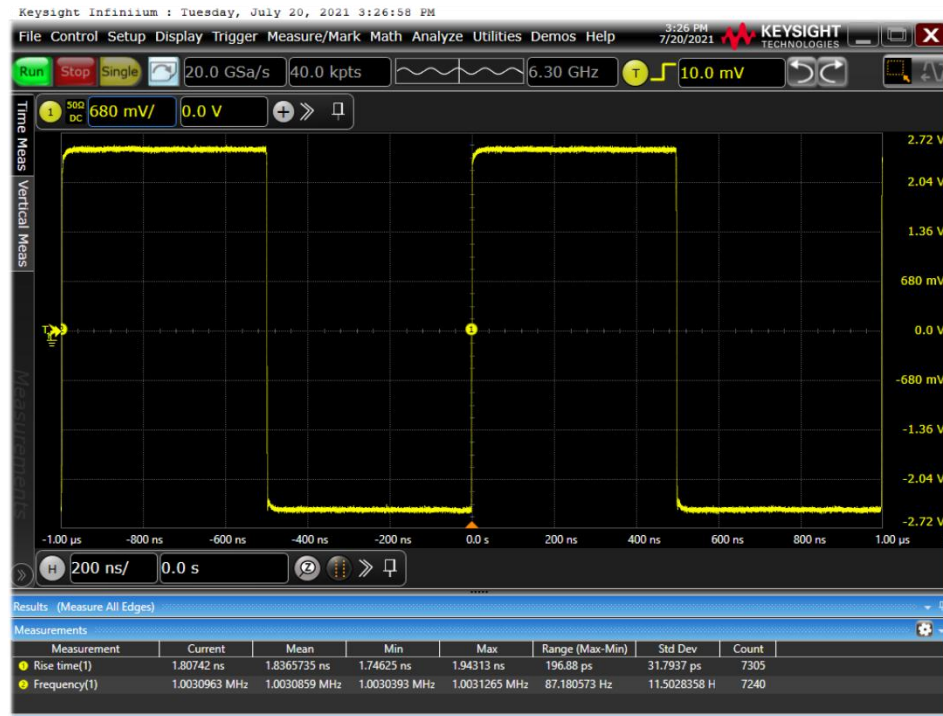




# Prototype I (Non-Standard Clock)

- Clock Phase Noise
- Agilent E5052B Signal Source Analyzer, Frequency Range 10 MHz to 7.5GHz
- 10Hz - 10MHz jitter <2ps

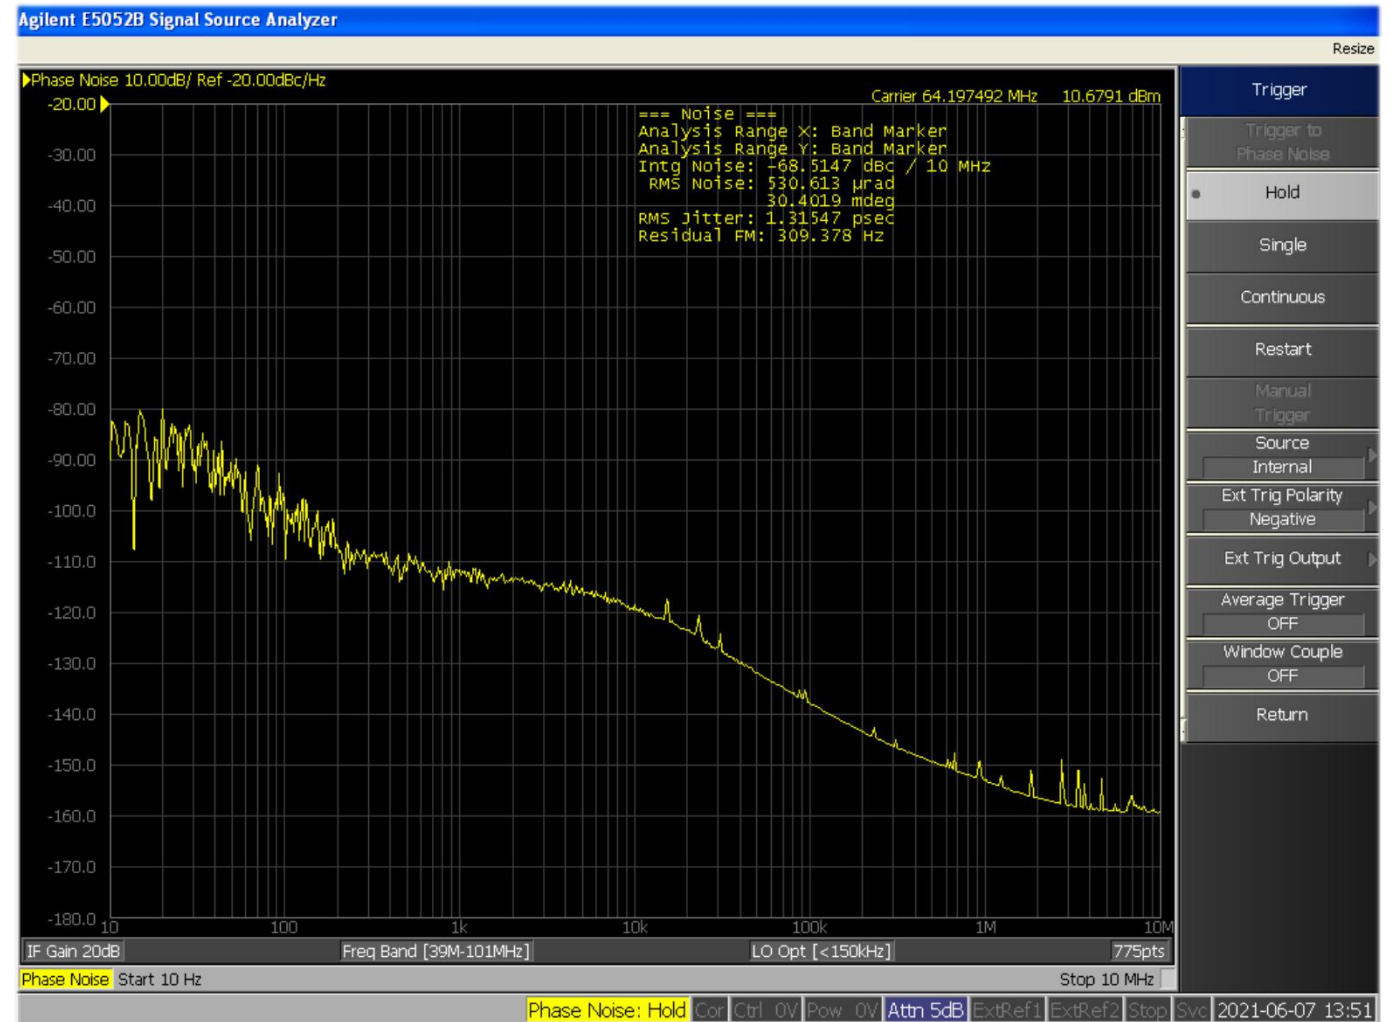

# Prototype I (Non-Standard Clock)

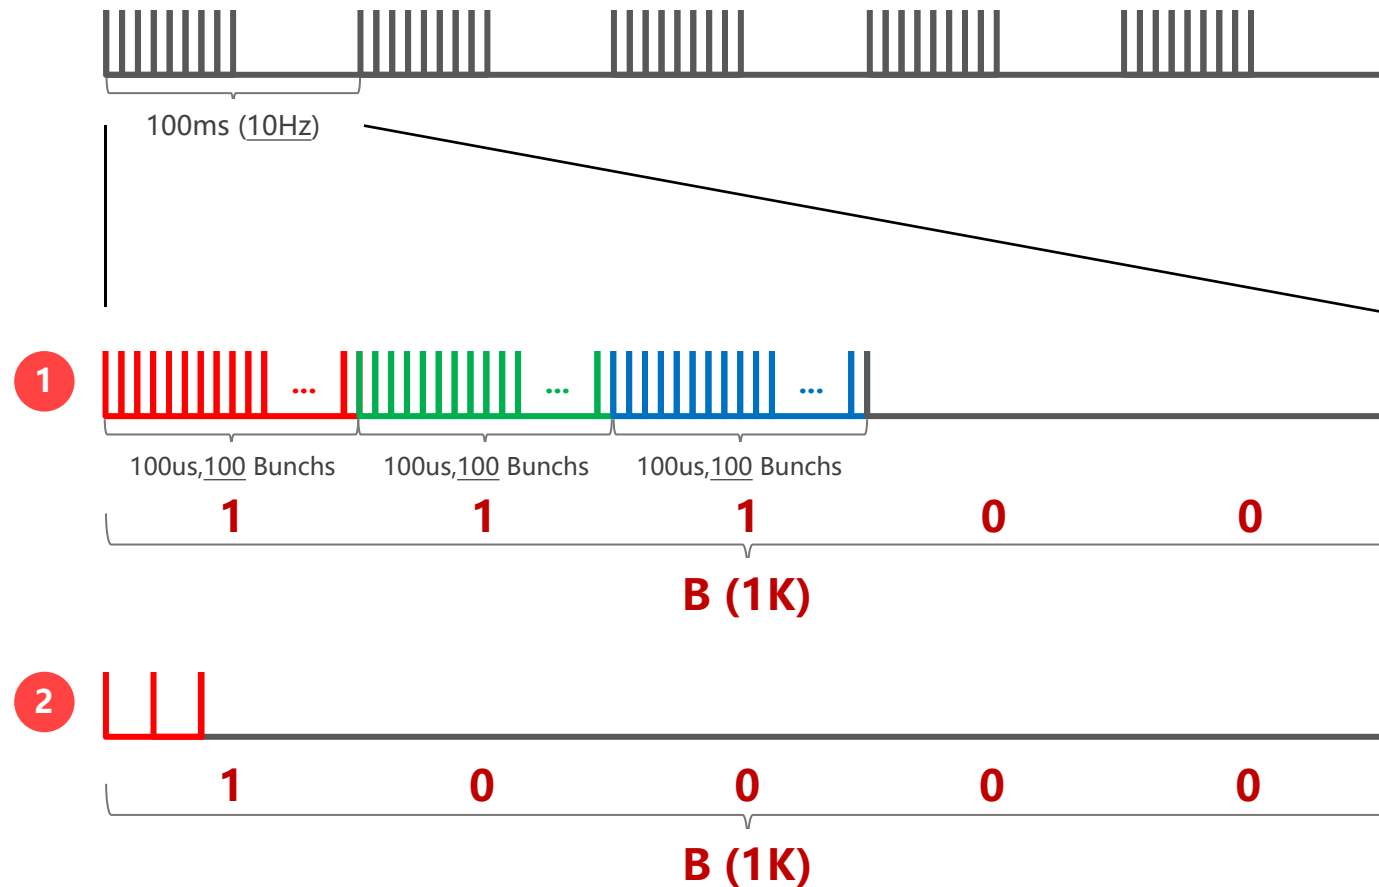


Bunch Train (Preliminary)

$$A \times B \times C$$

For example: 10Hz x 1K x 100

- A (10Hz): Train Repetition Rate
- B (1K): Sequential Editable Unit  
10000 ..., 11000 ...
- C (100): Arbitrary Editable Unit


# Prototype I (Non-Standard Clock)

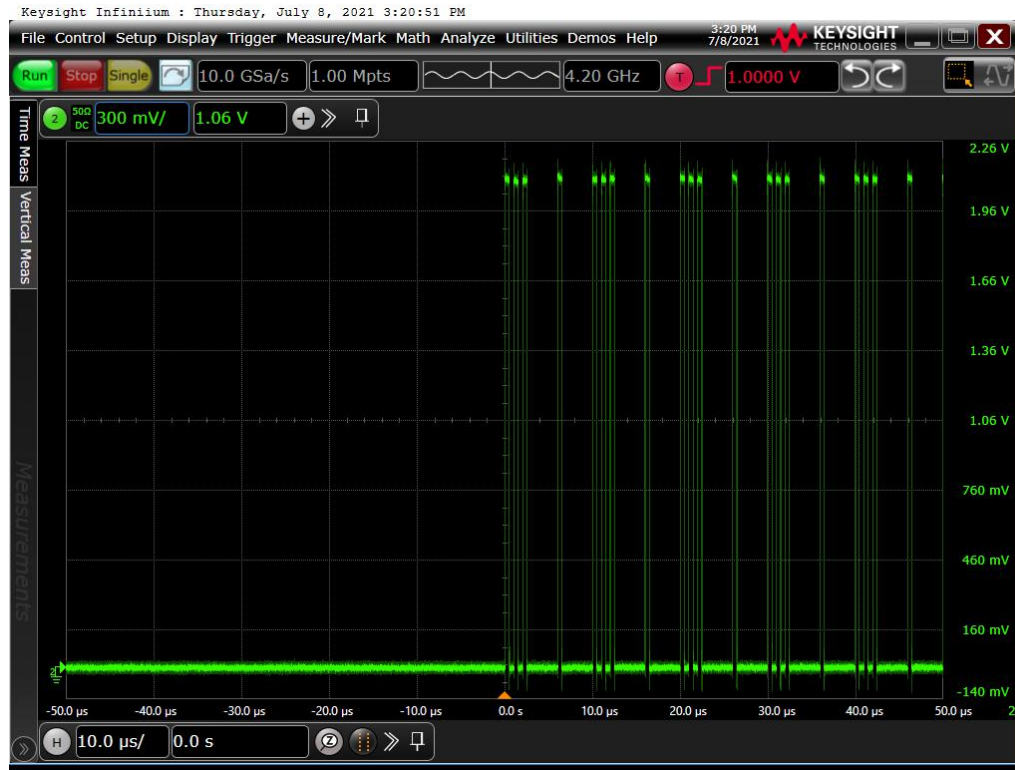

A=500Hz, B=111 ... 000 ... , C=1110001000 1110001000 ...


# Prototype II (Pulse Signals Distribution)

- Clock (125/62.5MHz) distribution and synchronization based on standard White Rabbit network
- The DDS (Direct Digital Synthesis) and D flip-flops (DFFs) are adopted for RF signal transfer and pulse configuration
- Off-chip delay for beam-synchronous trigger and on-chip delay for random-event trigger

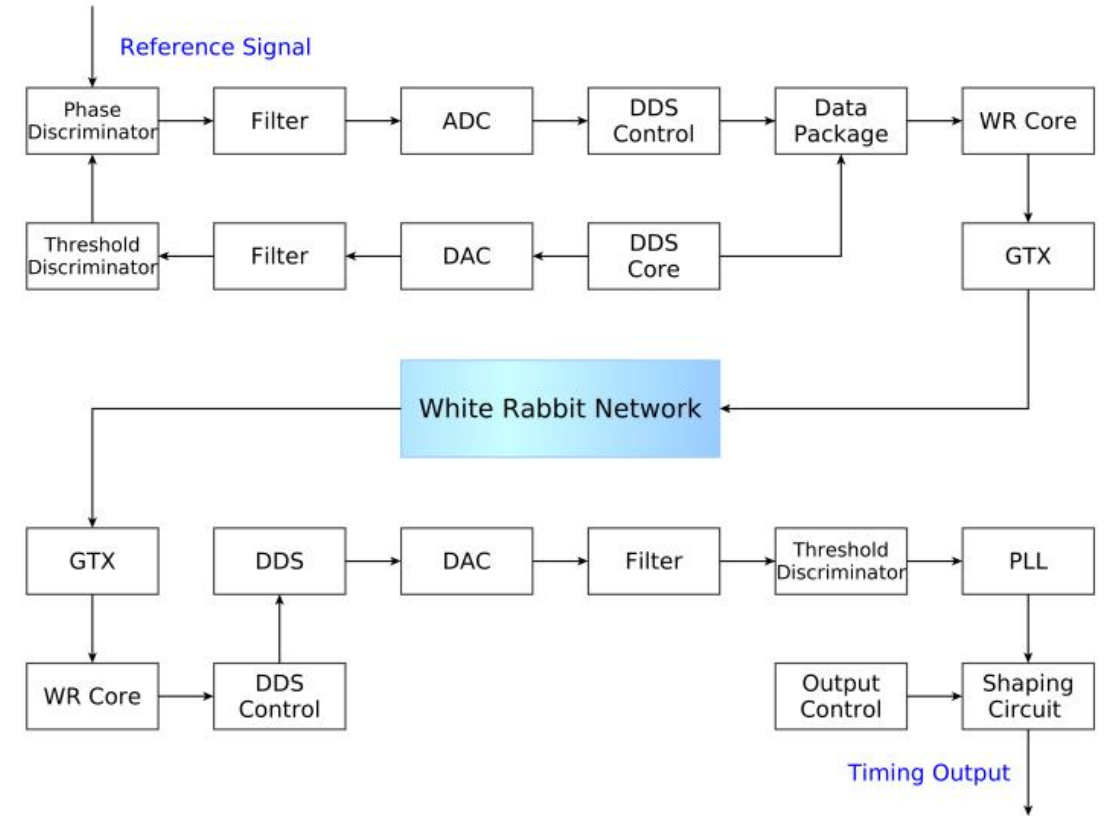


# Prototype II (Pulse Signals Distribution)

- Clock (125/62.5MHz) distribution and synchronization based on standard White Rabbit network
- The DDS (Direct Digital Synthesis) and D flip-flops (DFFs) are adopted for RF signal transfer and pulse configuration
- Off-chip delay for beam-synchronous trigger and on-chip delay for random-event trigger

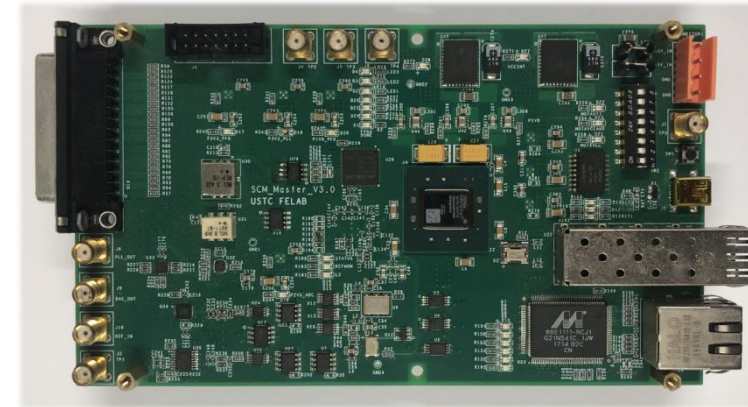

Master Node

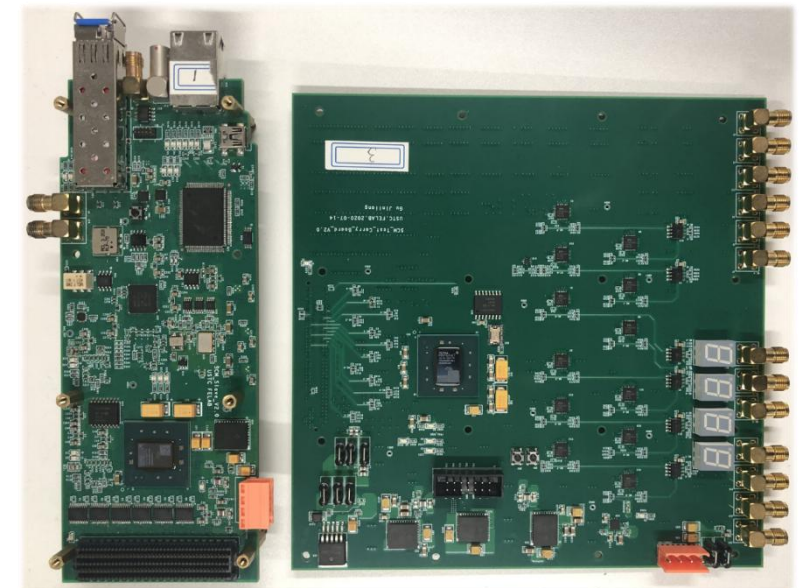


Slave Node




# Prototype II (Pulse Signals Distribution)

- Beam-synchronous trigger signal distribution
  - Jitter between the slave node output and reference signal <20ps
  - Jitter between slave nodes outputs <10ps
- Random-event trigger signal distribution
  - Jitter between the slave node output and input trigger <35ps

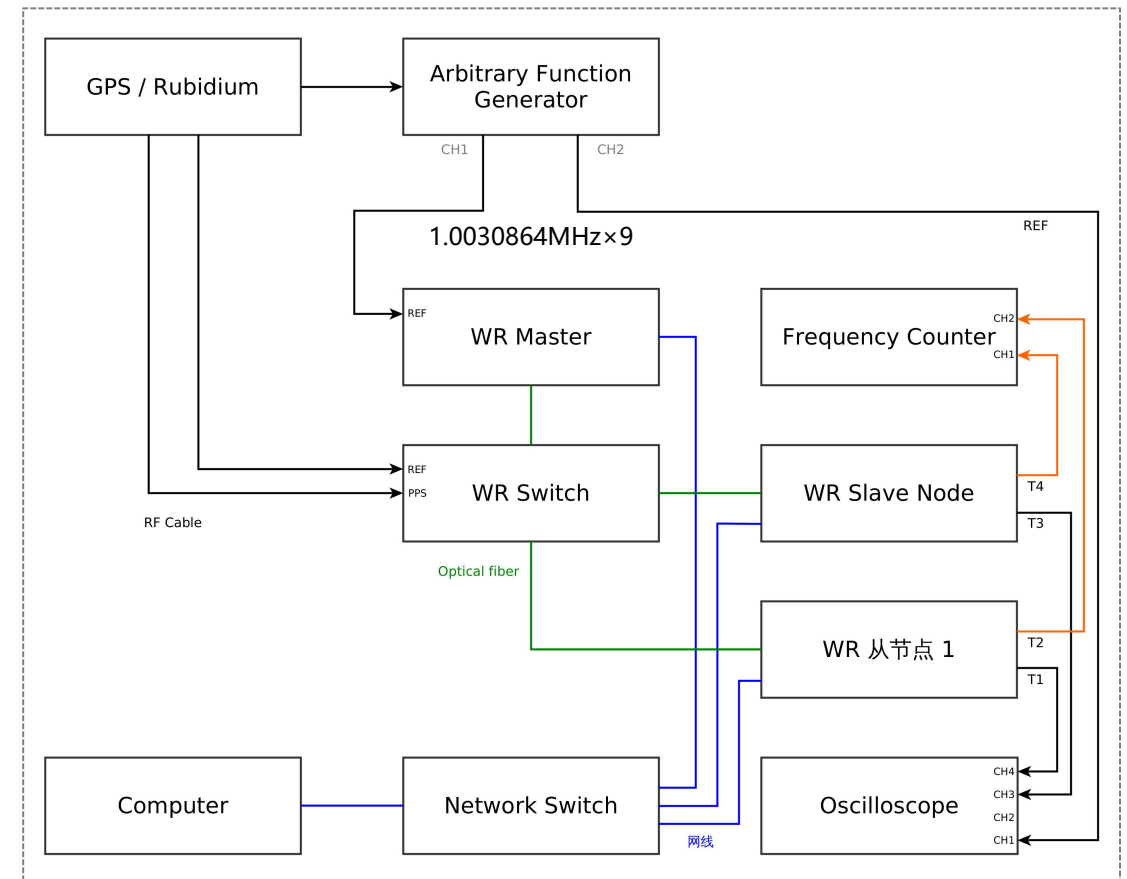

# Prototype II (Pulse Signals Distribution)

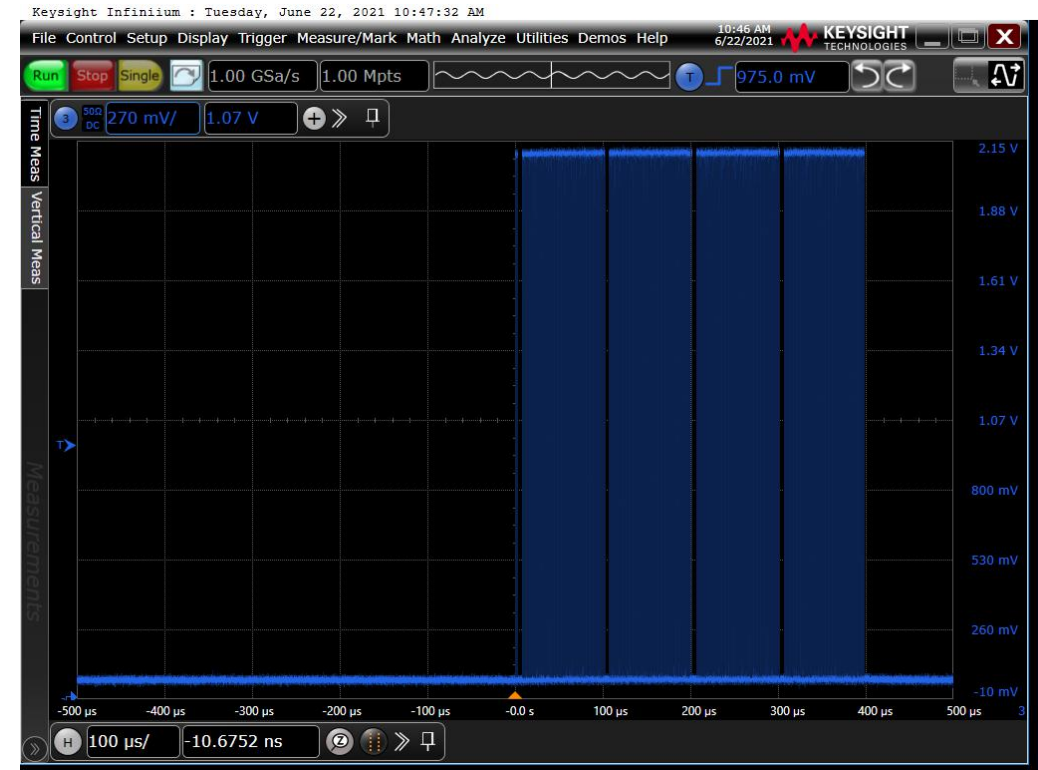

A=10Hz, B=11110000 ..., C=10100011 10100011 ...

# Summary



- The SHINE timing system is currently under construction.
- Three functions are designed, beam-synchronous trigger signal distribution, random-event trigger signal distribution and data exchange between multiple nodes.
- Two prototype systems were developed.
- The non-standard clock transmission was proposed and verified.

# Acknowledgment

- We would like to thank CERN colleagues of the Hardware and Timing Section, Beam Controls Group (BE-CO) for the discussions and suggestions.

# Team

- P.X.Yu, G.H. Chen, Q.W. Xiao (SARI, CAS)
- G.H. Gong, Y.M. Ye (Tsinghua University)
- J.L. Gu, L. Zhao, Z.Y. Jiang (USTC)



**Thank you for your attention.**