

# ON THE SUITABILITY OF A SOLENOID HORN FOR THE ESS NEUTRINO SUPERBEAM

M. Olvegård, T. Ekelöf, R. Ruber, V. Ziemann, Uppsala University, Sweden  
J.-P. Koutchouk, Uppsala University, Sweden and CERN, Geneva, Switzerland

## Abstract

The European Spallation Source (ESS), now under construction in Lund, Sweden, offers unique opportunities for experimental physics, not only in neutron science but potentially in particle physics. The ESS neutrino superbeam project plans to use a 5 MW proton beam from the ESS linac to generate a high intensity neutrino superbeam, with the final goal of detecting leptonic CP-violation in an underground megaton Cherenkov water detector. The neutrino production requires a second target station and a complex focusing system for the pions emerging from the target. The normal-conducting magnetic horns that are normally used for these applications cannot accept the 2.86 ms long proton pulses of the ESS linac, which means that pulse shortening in an accumulator ring would be required. That, in turn, requires  $H^-$  operation in the linac to accommodate the high intensity. As an attractive alternative, we investigate the possibility of using superconducting solenoids for the pion focusing. This solenoid horn system needs to also separate positive and negative pion charge as completely as possible, in order to generate separately neutrino and anti-neutrino beams. We present here progress in the study of such a solenoid horn.

## INTRODUCTION

The European Spallation Source (ESS) will provide neutrons to a variety of experiments in the applied sciences, starting 2019. The spallation neutrons are generated by a 5 MW proton beam impinging at 2 GeV on a rotating tungsten target. This world-unique intensity attracts projects beyond the neutron sciences, one of which is the ESS neutrino superbeam study, ESSnuSB [1]. The ESSnuSB plans to use a 5 MW beam from the ESS linac to produce an intense neutrino beam in a separate target station, as shown with the sketch in Fig. 1. These neutrinos will be directed towards an underground detector several hundreds of kilometers from the ESS site, where the number of electron and muon neutrinos will be counted. Placed at the second neutrino oscillation maximum, the megaton water Cherenkov detector is expected to help settle the existence of CP violation in the leptonic sector, by recording and comparing the amounts of neutrinos and anti-neutrinos.

The nuclear reactions that occur as the proton beam hits the target generate a shower of hadrons, mostly pions. These pions are to be collected and focused so that they travel in the direction of the far detector before they decay into muons and muon neutrinos. The established way of hadron collection is with a magnetic horn [2], which consists of a toroidal magnet structure where the pions need to

traverse a thin metallic conductor layer in order to reach the magnetic field region. The structure is powered by 350 kA [3], which leads to heavy ohmic heat dissipation in the conductor layer. As a result, the horn cannot accept the 2.86 ms proton pulse directly from the ESS linac, but an accumulator ring for pulse compression down to a few microseconds, is required [4]. For efficient injection into the ring the linac must support acceleration of  $H^-$  as well as the protons for neutron production, which has additional implications for the linac optics, and for the minimum curvature of transfer lines, etc. In addition, it requires an  $H^-$  source. In total, the horn requirements lead to an increase of the project complexity and cost and there are strong motivations for an alternative hadron collection scheme using superconducting magnets.

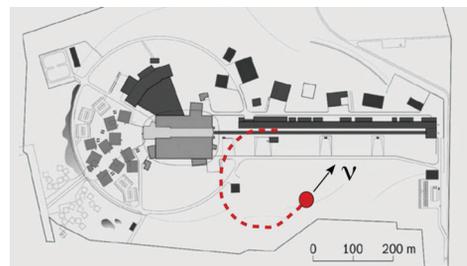


Figure 1: A sketch of the ESSnuSB layout at the ESS site.

## BACKGROUND

An attractive alternative to the van der Meer horn is a superconducting solenoid. Earlier studies conducted for neutrino factories and muon colliders, as well as for neutrino superbeams, have shown that a solenoid horn could perform as well or better for certain neutrino energy ranges [5]. Here, we look specifically at the ESSnuSB case with a moderate proton beam energy of 2 GeV.

The pion distribution expected from the target was computed by N. Vassilopoulos for a van der Meer horn [3] and is shown in Fig. 2. We see a wide distribution both in total momentum and in emission angle  $\theta$  with respect to the forward axis. The 2D distribution has its peak at around 500 MeV and 0.6 rad, which, with the strong tails, means that powerful collection directly at the target is necessary.

Figure 3 shows the decay scheme of the pions, whose life time in the rest frame is 26 ns. Since the detector cannot distinguish neutrinos from anti-neutrinos the pions of the wrong sign must be removed close to the source, before they have time to decay and contaminate the beam. Secondly, the length of the decay tunnel must be optimized so that the number of muons that have time to decay is mini-



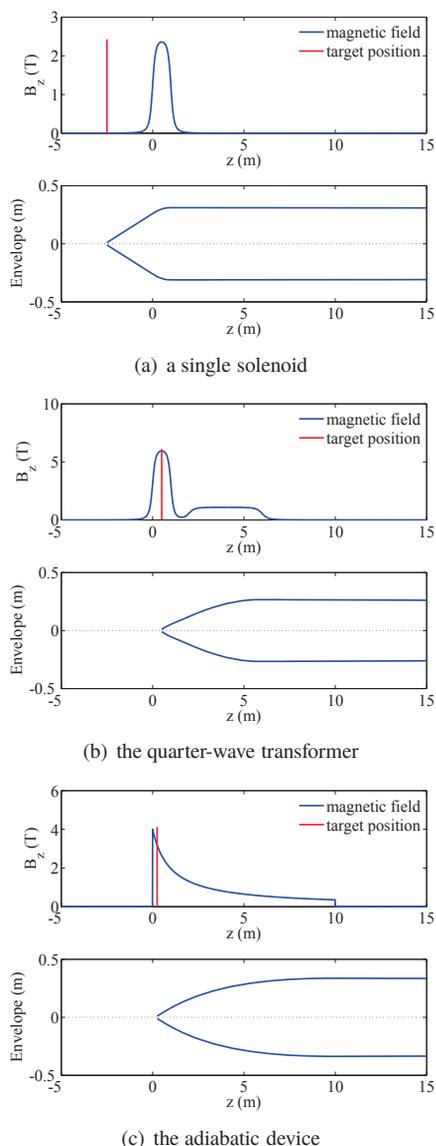


Figure 4: Beam envelope evolution for the case where a) the target is placed outside a single solenoid; b) the target is put inside a strong solenoid followed by a weaker one, and c) the target is put inside an adiabatic device with a continuously decreasing field

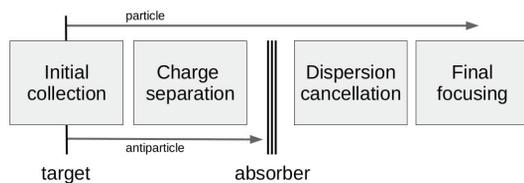


Figure 5: A scheme of the envisioned configuration of the solenoid system.

around 1 degree. The initial beam size is around 1 cm and the energy spread is 10% around 600 MeV. In this simple

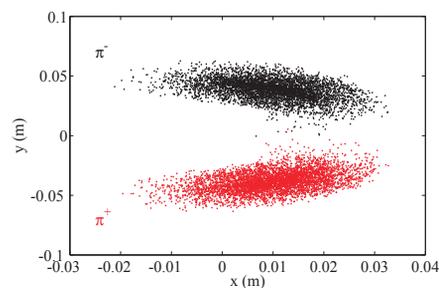


Figure 6: An example of the separation of charges in the middle of the set-up.

configuration it is thus possible to select one charge and remove the other.

## CONCLUSION

The ESSnuSB aims at using the ESS linac to produce an intense neutrino superbeam for a long baseline oscillation experiment that could reveal CP violation in leptons. To reduce the cost and complexity of the project on the accelerator side, we have performed preliminary investigations of the possibility of using a superconducting solenoid to collect pions emerging from a target. The solenoid system should reduce the angular divergence down to the order of the spread caused by the pion decay. Furthermore, the two pion charges need to be separated close to the source, as completely as possible. Previous studies suggest that the focusing capabilities are enough. We observe that in order to find a solution to the charge separation problem, further studies, which go beyond the paraxial beam optics used here and take the full angular and momentum distribution into account, are needed.

## ACKNOWLEDGEMENTS

We would like to send a special thank you to Nikos Vassilopoulos at IPHC-IN2P3/CNRS Université de Strasbourg for providing us with the pion distribution used in the study.

## REFERENCES

- [1] E. Baussan et al., Nucl. Phys. B, vol. 885, pp. 127-149, 2014.
- [2] S. van der Meer, CERN-NPA-Int-62-11, 1962.
- [3] N. Vassilopoulos, *The ESS neutrino super beam optimization design studies*, NuFact workshop, Beijing, China, 2013.
- [4] E. Wildner et al., THPF100, IPAC 15, these proceedings, 2015.
- [5] M.V. Diwan, S. Kahn and R. Plamer, Tech. report BNL-66303, 1999.
- [6] M. Reiser, *Theory and Design of Charged Particle Beams*, Wiley-VCH, 2nd ed., 2008.
- [7] R. Chehab, Nucl. Instrum. and Methods A, 451, p. 362-366, 2000.