

# NUCLOTRON DEUTERONS BEAM PARAMETERS MEASUREMENTS USING SSNTD

K. Husak\*, V. Bukhal, The Joint Institute of Power and Nuclear Research — “SOSNY” NASB, Laboratory for Experimental Nuclear Research and Expert Analysis of Radioactive Materials, Minsk, Belarus

A. Patapenka, A. Safronava, I. Zhuk, JIPNR-Sosny NASB, Minsk, Belarus

M. Artiushenko, V. Sotnikov, V. Voronko, NSC/KIPT, Kharkov, Ukraine

## Abstract

Accelerator Driven System (ADS) are considered as prospective nuclear installations for energy production and nuclear waste transmutation or recycling. The international project “Energy and Transmutation of Radioactive Wastes” (“E&T RAW”) running in the Veksler and Baldin Laboratory of High Energy Physics (VBHEP) of the Joint Institute for Nuclear Research (JINR) (Dubna, Russia) at the accelerator complex “Nuclotron” is aimed at a feasibility study of using a deeply subcritical natural or depleted uranium or thorium active core with very hard neutron spectrum inside for effective burning of the core material together with spent nuclear fuel. For any ADS experiment a necessary and a key element is beam diagnostics. In this paper a technique for precise measurement of deuteron beam parameters using solid state nuclear track detectors (SSNTD), developed within the bounds of “E&T RAW” project, is presented. The deuteron beam parameters, specifically beam shape, size and position on a target, are obtained from track density distribution on the irradiated track detectors. The presented technique has a resolution of 1 mm. The experimental results of beam parameter measurements for deuterons with energies of 2, 4 and 8 GeV at the irradiation of the uranium subcritical assembly “QUINTA”, obtained with the SSNTD technique, are presented.

## INTRODUCTION

The experience of nuclear power reactors operation with uranium and plutonium isotope fuel fissioned by neutrons has shown that future extensive nuclear power usage is impossible without solutions of some scientific, technological and ecological problems. One possible solution to these problems is to create ADS [1, 2]. It is a combination of a subcritical reactor coupled with an external accelerator. The basic principle consists in production of a large number of neutrons in the spallation process induced by relativistic ions impacting on a heavy metal target, and their multiplication in a subcritical blanket, resulting in a dense neutron field which can be used for transmutation of long-lived nuclear waste to short-lived radioisotopes.

The JINR project “E&T RAW” is based on so called Relativistic Nuclear Technology (RNT) proposed recently [3] by one of the institutions (CPTP «Atomenergomash», Moscow) participating in

“E&T RAW” collaboration.

About all RNT engineering problems including creation of appropriate accelerator can be discussed only after detailed study and verification of basic physics ideas of the proposed approach. This is the aims of JINR project “E&T RAW” adopted for realization during 2011 – 2013 on the basis of deuteron and proton beams of Nuclotron in incident energy range from 1 to 10 GeV and natural (or depleted) massive uranium targets available at JINR.

## EXPERIMENTAL INSTALLATIONS

### *Nuclotron Accelerator*

The Nuclotron is a superconducting strong focusing accelerator of relativistic nuclei. The Nuclotron lattice is typical for strong-focusing synchrotrons with separated functions. It contains 8 super periods and 8 straight sections, one of which is “warm”. The magnets are fastened to a vacuum shell of the cryostat Ø 540 mm by 8 suspension parts of stainless steel. A nitrogen shield Ø 490 mm covered with 20 layers of super insulation is placed in the vacuum space between the magnet and the vacuum shell. The dipole magnet has a window-frame type iron yoke with the sizes of window of 110 x 55 mm<sup>2</sup>. The quadrupole lens has the iron yoke with hyperbolic poles. The SC-cable was manufactured of a 5 mm in diameter copper-nickel tube with a wall thickness of 0.5 mm and 31 in parallel connected multifilament strands of 0.5 mm in diameter covering an outer surface of the tube. The strand consist of 1045 NbTi filaments 10 µm in diameter stabilized by copper [4].

The design parameters of the dipoles are:  $B=2.2$  T and  $dB/dt=2 \div 4$  T/s. Nominal current amplitudes are: up to 6.3 kA and 6 kA for the dipoles and quadrupoles respectively. There are 96 dipoles, 64 quadrupole, and 32 correcting SC-magnets in the Nuclotron ring with circumference of 251.5 m.

All the magnets are connected in parallel with supply and return helium headers. The cooling of the magnets is performed by two-phase helium flow. The Nuclotron operational temperature is 4.5 – 4.7 K. The cryogenic supply system is based on three industrial helium refrigerator/liquefiers with a total capacity of 4.8 kW at 4.5 K.

### *Target Assembly Description*

The target assembly “QUINTA” (Fig. 1) consists of five identical sections of hexagonal aluminum containers with an inner diameter of 284 mm, each of which is filled with

\*stikrina@mail.ru

61 cylindrical metallic natural uranium blocks of 36 mm diameter and a length of 104 mm aluminum cover. One block weight is 1.72 kg and the total mass of uranium in one section is 104.92 kg. The front section has the cylindrical input beam channel of 8 cm in diameter. The total mass of uranium in the target assembly is about 500 kg.

In front of the target and between the sections as well as behind it, there are 6 experimental plates for detectors and samples. To prevent the free passage of some part of an incident beam through the horizontal empty space between the tightly packed uranium cylinders, an axis of the target assembly is shifted by 2 degrees with respect to the beam axis.

The lead blanket with thickness of 10 cm with the input beam window (150 x 150 mm) surrounds "QUINTA". In the top cover of the blanket there are special slots for quick removal of the detector's plates.

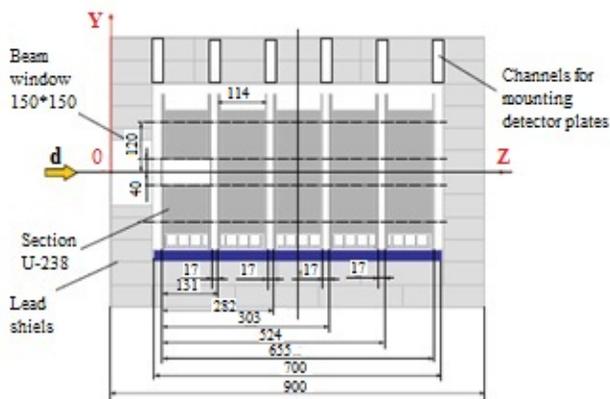


Figure 1: The target assembly "QUINTA" equipped by lead blanket.

The main objectives of the experiments with the target assembly "QUINTA" were:

- Testing methods to measure the basic characteristics of nuclear processes occurring in the active core under the influence of relativistic particles. It is necessary for the further experiments at quasi-infinite uranium target (mass ~ 21 t) available at JINR.
- Basic and applied studies of the interactions of relativistic particles with massive multiplying target.

### Experiment Details

Irradiation of the "QUINTA" setup was carried out with 2 GeV, 4 GeV and 8 GeV deuterons beams.

The axis of the setup was aligned with beam axis with the help of the adjustable stand under the whole setup. The alignment of the beam center with the center of the setup was achieved by examining polaroid films placed in front of the target and exposed to a couple of deuterons pulses prior to the installation of the sample plates and the start of the main irradiation.

Deuteron beams shape and position on the target were obtained from track density distributions on the irradiated

track detectors. Sensors made of  $^{nat}\text{Pb}$  foils and artificial mica as SSNTD were used for registration of  $^{nat}\text{Pb}(d,f)$  reaction. Sensors were placed directly onto the beam input window in the lead blanket surrounding the uranium target and at the first experimental plate (Plata 0). The sensors had the size 3 x 4 cm.

### EXPERIMENTAL TECHNIQUE

In our experiments we used a SSNTD method to determine the beam parameters such as beam shape and size, beam center position on the target, total beam intensity.

SSNTD technique is based on correlation between the track density on a track detector and a flux density of the investigated beam.

Sensors made of track detectors placed in contact with a fission foil are irradiated by the beam. Fission fragments produced in spallation reactions in fission foils form tracks on the track detectors surface.

After the exposure the detectors are etched in appropriate chemical reagents (depending on the detector type) to make tracks "visible" in an optical microscope (Fig. 2). To obtain an accurate measure of the track densities the tedious method of manual track counting is chosen. We count tracks in many photomicrographs produced for each detector using an optical microscope. The distributions of the track density along the X- and Y-axis are used to obtain the beam intensity distribution on the target.

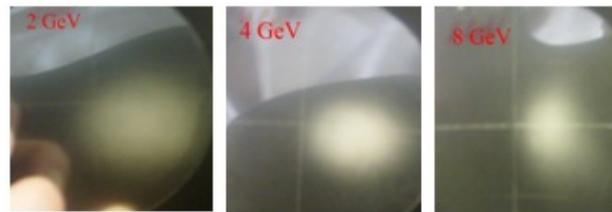


Figure 2: SSNTD after etching, RUN DECEMBER2012.

The most common formula for the relationship between the tracks density and the flux density is determined as:

$$N^i = A^i \mu^i \varepsilon d \rho t_{\text{exp}} \int_0^{\infty} \sigma_f^i(E) \varphi^i(E) dE$$

where  $A^i$  - number of charged particles produced in the fission reaction of i-nuclides;  $\mu^i$  - the fraction of charged particles reaching the detector in the fission reaction of i-nuclides;  $\varepsilon$  - detection efficiency of the charged particle track detectors;  $d$  - i-layer thickness of nuclides in the radiator, cm;  $\rho$  - nuclear density of i-nuclides in the radiator, nuclei/cm<sup>3</sup>;  $t_{\text{exp}}$  - duration of sensors the exposure, sec;  $\sigma_f^i(E)$  - differential microscopic fission cross section of i-nuclides with deuterons, cm<sup>2</sup>.

The technique was developed by I. Zhuk and A. Malikhin. It was applied for fission reactions rates measurements in reactor systems [5, 6]. The presented technique has a resolution of 1 mm.

In this work thick radiators were used. In the context of SSNTD technique “thick” radiator means that the radiator thickness is exceeded significantly the mean free path of fission fragments in the radiator material. This circumstance allows to reject an uncertainty caused by radiator thickness determination (as for thin foils) and to increase the total number of fission fragments. At the same time, due to the radiator thickness, we can register the only one fission fragment from the binary fission process and cannot distinguish it by using two correlated tracks. So, the fission process cannot be discriminated from the other high energy processes (such as spallation, multifragmentation and strong asymmetric fission) in which heavy and medium mass particles can be generated. FLUKA, intranuclear cascade model and the model of the nucleon-nucleon interactions RQMD-2.4 were applied to study this effect. The overall contribution of this effect into the relative variation of the sensitivity of the sensor is  $\sim 0.5\%$  and was taken into account when analyzing the results.

In addition, the influence of the kinematics of  $^{nat}\text{Pb}$  fission process on the track density on the track detectors has to be taking into account for the whole deuterons energy range. Pulse transfer effect for  $^{nat}\text{Pb}$  can be compensated by the “sandwich-like” composition of sensors, which allows to register tracks in  $4\pi$  geometry [7].

### EXPERIMENTAL RESULTS

The experimental tracks density distributions of fission fragments of  $^{nat}\text{Pb}$ , which characterize the spatial distribution of the incident deuteron beams at the front end of a uranium target, are shown in Fig. 3. These distributions are well approximated by a three-dimensional Gaussian function. Calculated from the experimental data the beam position parameters of the Gaussian distributions are shown in Tables 1 and 2. Total deuteron beam intensity in 46th Nuclotron Run (December 2012) measured with SSNTD is presented in the Table 3. Full width at half-maximum (FWHM) of a Gaussian distribution is expressed in terms of its standard deviation  $\sigma$  as

$$FWHM = 2\sigma\sqrt{2 \ln 2}$$

Table 1: Primary Beam Parameters (at the Beam Input Window in the Lead Blanket)

Deuterons energy, GeV	Beam centre coordinates, cm		FWHM of distribution, cm	
	X	Y	FWHM <sub>X</sub>	FWHM <sub>Y</sub>
2	2.0±0.2	0.0±0.1	2.2±0.3	1.5±0.3
4	2.1±0.1	-0.3±0.2	1.4±0.2	0.9±0.1
8	1.0±0.2	-0.1±0.1	0.9±0.1	1.0±0.1

Table 2: Primary Beam Parameters (at the Plata 0)

Deuterons energy, GeV	Beam centre coordinates, cm		FWHM of distribution, cm	
	X	Y	FWHM <sub>X</sub>	FWHM <sub>Y</sub>
2	1.5±0.2	0.1±0.1	2.0±0.1	1.7±0.2
4	1.8±0.1	-0.3±0.1	1.5±0.2	1.1±0.1
8	0.9±0.1	0.1±0.1	1.0±0.1	1.3±0.1

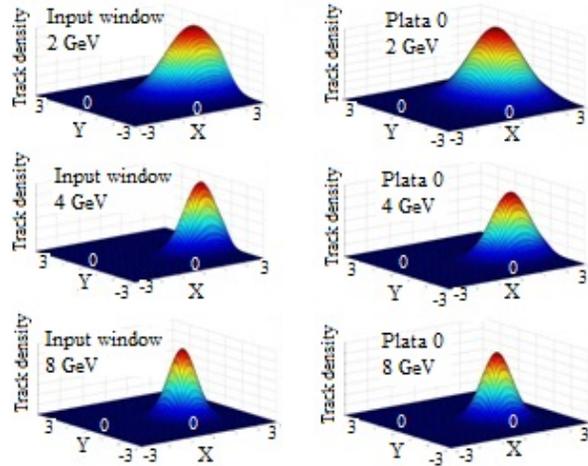


Figure 3: The spatial distributions of the beam at the target.

Table 3: Total Deuteron Beam Intensity in 46th Nuclotron Run (December 2012) Measured with SSNTD

Deuterons energy, GeV	Total deuteron intensity, number of deuterons
2	$(3.0\pm 0.3)\cdot 10^{13}$
4	$(3.1\pm 0.3)\cdot 10^{13}$
8	$(8.6\pm 0.9)\cdot 10^{12}$

Figure 4 shows the position of the deuteron beams at the central uranium rods of the target. At the figure the 2D projections of the tree-dimensional distributions of the deuteron beam intensity on the input surface and the first plate of the “QUINTA” assembly are presented. Dotted lines show the uranium rods cross-sections. The ellipse semi-major and semi-minor axes (thick lines on the figure) correspond to the  $1\sigma$  and  $2\sigma$  parameters of the Gauss distribution. Integration over the surface of the minor and major ellipses gives respectively 68 % and 95 % of the total number of primary deuterons hitting the target.

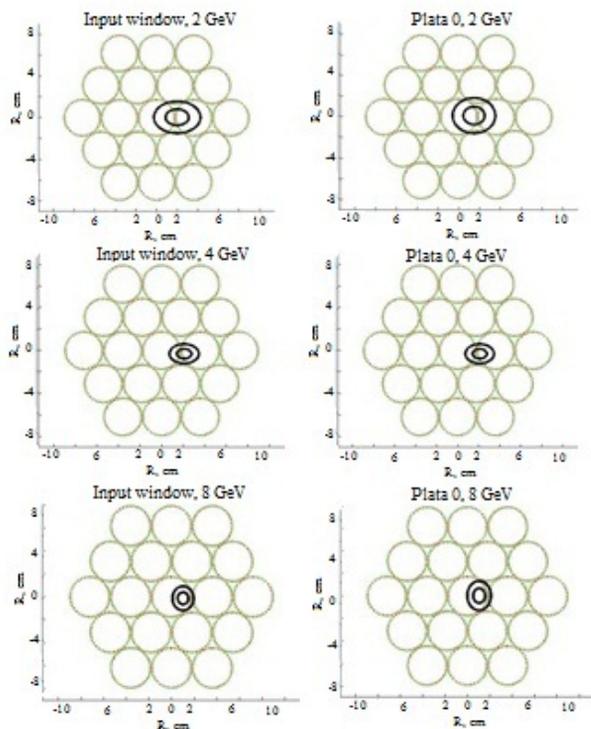


Figure 4: 2D projections of the tree-dimensional distributions of the deuteron beam intensity on the target.

From the Fig. 4 it is obvious that in all experiments the beam center was shifted from the assembly central point. This has to be taken into account for analyzing the experimental data on nuclear reactions inside the setup.

## CONCLUSION

Beam position measurements, as well as beam size and beam shape, on a massive target irradiated by relativistic particles, allow to determine the analysis correctness of spatial distributions of nuclear reactions measured inside the target. In our case, it is number of fission of  $^{238}\text{U}$  and the rate of production of  $^{239}\text{Pu}$ , recorded by different detectors located inside and on the surface of the assembly. In addition, the experimental results of the beam parameters determination using the presented SSNTD technique can be used for the correct modeling of the experiments using by different program codes (such as MCNPX, GEANT4, FLUKA) and testing them by comparison with measurements.

## REFERENCES

- [1] C. Rubbia, J. A. Rubio, S Buono, et al., Conceptual Design of a Fast Operated High Power Energy Amplifier // CERN/AT/95-44 (ET), Geneva, 1995.
- [2] A. S. Gerasimov, G. V Kiselev. Science and Technology Problems of the Electronuclear Devices for Transmutation and Energy Production (Russian experience) // Fizika Elementarnykh Chastits I Atomnogo Yadra, 2001, v.32, issue 1, p.143-188.

- [3] V. V. Chilap et al., The problems of development of worldwide nuclear power and the relativistic nuclear technologies (RNT) (in Russian), <http://www.cftp-aem.ru/Data/RADS02.pdf>.
- [4] Kovalenko A. D., Nuclotron: first beams and experiments at the superconducting synchrotron in Dubna, [http://nucloserv.jinr.ru/text/2004/nuclotron\\_overview.html](http://nucloserv.jinr.ru/text/2004/nuclotron_overview.html)
- [5] Zhuk, I. V. The spatial and energy distribution of neutrons and functional in critical systems modeling composition of active zones temperature gas-cooled reactor fuel matrix: dis. ... candidate. tehn. sciences: 05.14.03 (in Russian), I. V. Zhuk. - Minsk, 1989, p. 203
- [6] Malikhin, A. P. Experimental study of integral parameters of critical systems with different neutron spectrum by solid track detectors: dis. candidate. tehn. sciences: 05.14.03 (in Russian), A. P. Malikhin. - Minsk, 1979, p. 283
- [7] K. V. Husak, A. S. Patapenka, A. A. Safronova, I. V. Zhuk. Experimental determination of value of linear momentum transfer by deuterons to fission fragments of lead (in Russian), Scientific publication "Youth in Science", Proceedings of the International Conference of Young Scientists (Minsk, 17-20 April 2012). S. 291-298.
- [8] Furman W. I., Adam J., Baldin A. A. et al., Recent results of study of ADS with 500 kg natural uranium target assembly QUINTA irradiated by deuterons with energies from 1 to 8 GeV at JINR NUCLOTRON, In Proceedings of XXI IHEP PoS(MC2000)086.