A Graphical Tool for Viewing and Interacting with a Control System

J. Forsberg, V. Hardion and D. Spruce, MAX IV Laboratory, Lund, Sweden

Abstract

We present a graphical interface ("synoptic") for displaying status information and enabling user interaction with the Tango based control system for the MAX IV synchrotron. It focuses on bringing an intuitive view of the whole system, so that operators can quickly access the controls for any hardware based on its physical location.


The view is structured into different layers that can be selectively shown, and various live updated information can be displayed in the form of e.g. color or text. Panning and zooming is supported, as well as invoking commands. The interface is defined by an SVG drawing which can be edited without programming expertise.

Project goals

- A user friendly view of the control system
- Immediate access to important information
- A quick way to lauch specific GUIs




Architecture

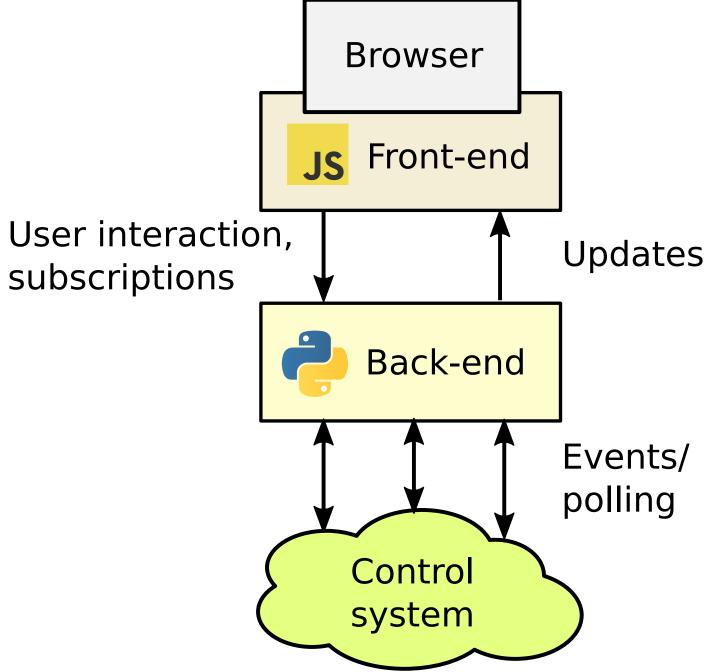



Since our system is based on modern web technologies, it can be run as a web service accessible by standard browsers, but it can also be integrated in GUI applications.

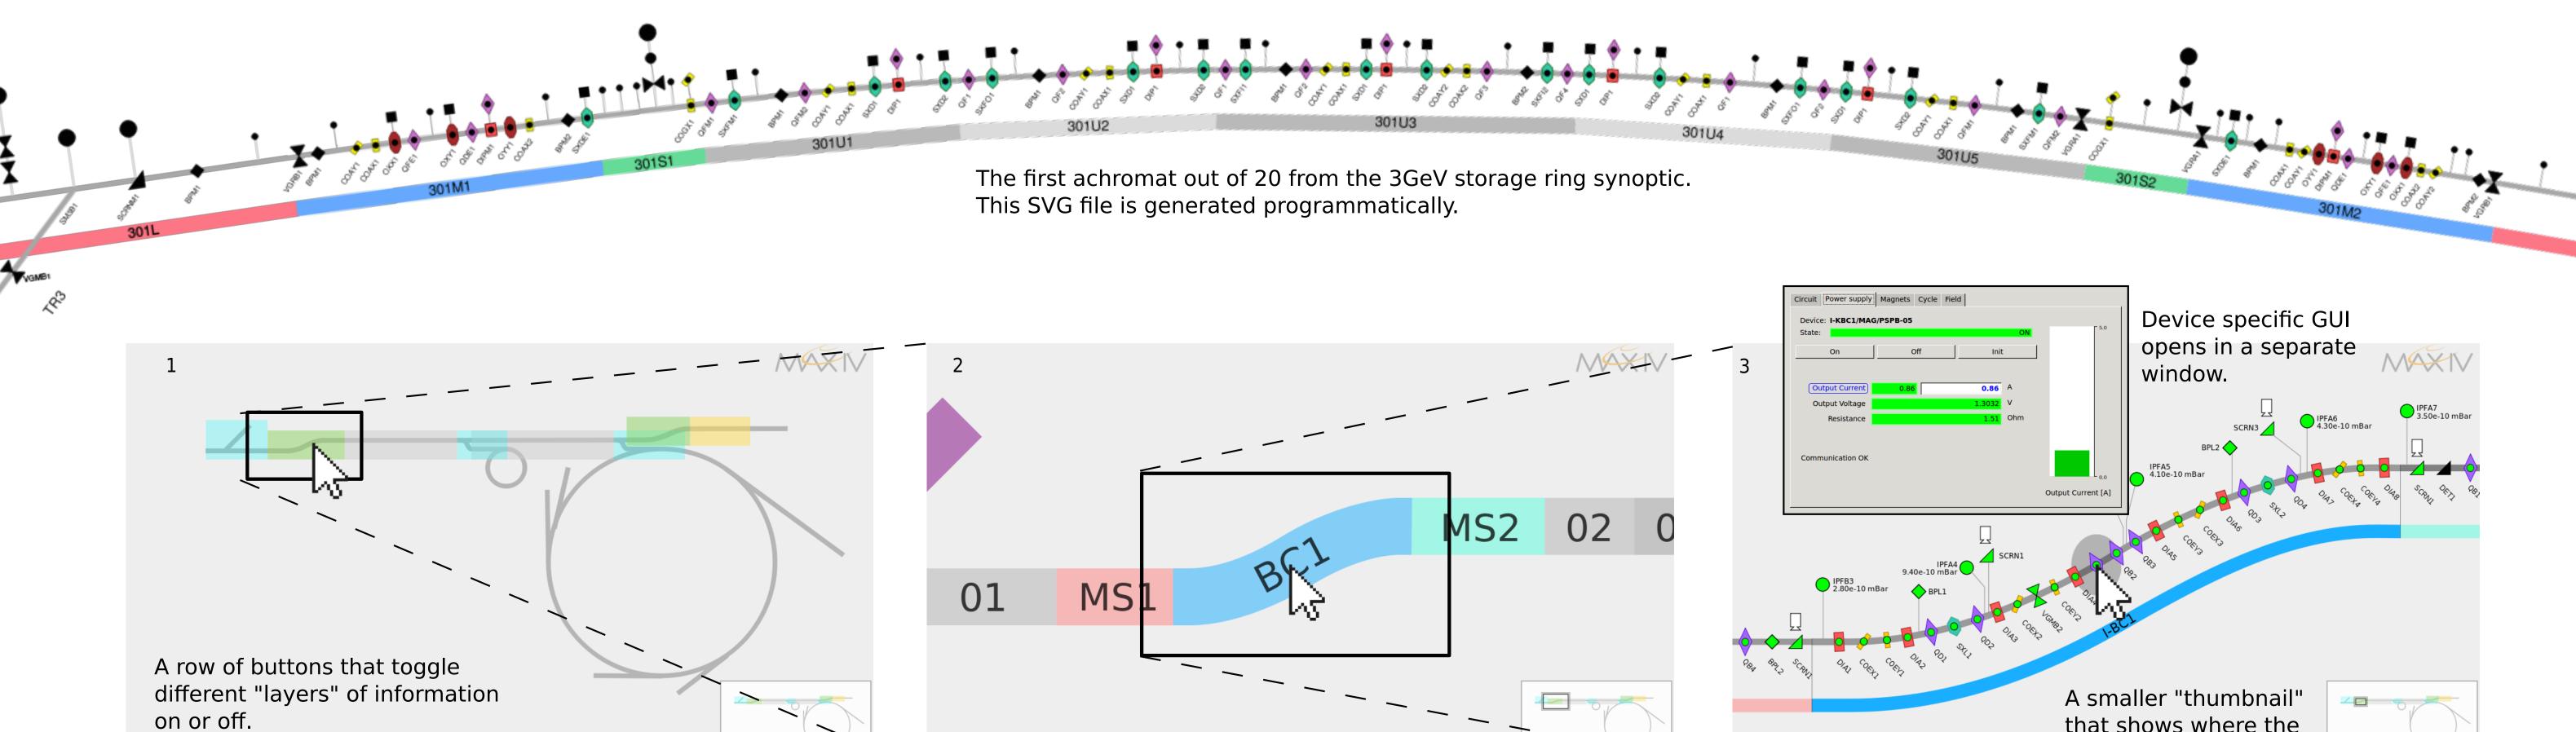

DIA RF MAG VAC

This is the SVG synoptic for the linear accelerator, The user can successively zoom into the image by clicking different parts, or freely by spinning the mouse wheel

An intermediate detail level where each section of the linear accellerator is shown.

In this detailed view, each object represents a TANGO device. The State of the device is represented by color, and for ion pumps the Pressure attribute is displayed as text. The user can launch specialised panels for interacting with a particular device (here, a magnet).


R3Vacca File View Taurus Tools Panels Help 🎦 🛛 Load Perspectives 🗸 🛛 🔯 🗗 🗶 Device 🛛 🗷 Synoptic Device Browser (right-click on any element to search/st Q R3-311M1/DIA/TCO-02 🔲 7 R3-305 X State FlowGauge 1S1 311M1 HeatAbsorber R3-305L/VAC/IPFC-01 R3-305S1/VAC/IPFC-01 Attributes Commands R3-30552/VAC/IPFC-01 R3-305U1/VAC/IPFE-01 IonPumpSummary ByPassed (Thermocouple ThermocoupleSummary Interlock VacuumGauge VacuumValve RawTemperature 244.00 R3-306 Temperature 24.40 degree Celsius > R3-307 > R3-308 R3-309 R3-310 7 R3-311 This equipment seems to work fine. FlowGauge HeatAbsorber R3-311L/VAC/IPFC-01 R3-311S1/VAC/IPFC-01 Overview R3-311S2/VAC/IPFC-01 R3-311U1/VAC/IPFE-01 Current value IonPumpSummary Thermocouple Average ion pump pressure R3-311L/DIA/TCO-01 R3-311M1/DIA/TCO-02 VAC DIA MAG Reset Apply R3-311M1/DIA/TCO essure Profile Pumps average pressur Gauges pressures (mBar Pumps pressures (mBar) pump pump

 \sim

DIA RF MAG VAC

File format



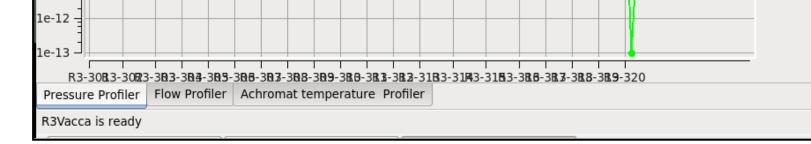

The synoptic widget can also be embedded in an application (this one specialised for vacuum monitoring of the storage ring) and react to signals such as selecting a device by directly zooming to it.



An example of a SVG synoptic for a single beamline. It is based on an image file supplied by the beamline scientists.

The MAX IV Laboratory

The MAX IV Laboratory opened for operation in 1987 (under the name MAX-lab) and is a national laboratory operated jointly by the Swedish Research Council and Lund University. The laboratory supports three distinct research areas: Accelerator Physics, Research based on the use of Synchrotron Radiation, and Nuclear Physics using high energy electrons. At present three synchrotron storage rings are in operation MAX I-III and each year close to 1000 researchers visit the laboratory to perform experiments. The MAX IV laboratory is also responsible for the build up of the MAX IV facility situated in the Brunnshög area just outside of Lund and approx 2 km from the present facility.