

STATUS OF THE RAL FRONT END TEST STAND

A.P. Letchford, M.A. Clarke-Gayther, D.C. Faircloth, D.J.S. Findlay, S.R. Lawrie, P. Romano, P. Wise (STFC RAL, Didcot, UK), F.J. Bermejo (Bilbao, Spain), J. Lucas (Elytt Energy, Madrid, Spain), J. Alonso, R. Enparantza (Fundación Tekniker, Elbr, Spain), S.M.H. Al Sari, S. Jolly, A. Kurup, D.A. Lee, P. Savage (Imperial College of Science and Technology, London, UK), J. Pasternak, J.K. Pozimski (Imperial College of Science and Technology, London; STFC RAL, Didcot, UK), C. Gabor, C. Plostinar (STFC ASTeC, Didcot, UK), J.J Back (University of Warwick, Coventry, UK)

Abstract

High power proton accelerators (HPPAs) with beam powers in the several megawatt range have many applications including drivers for spallation neutron sources, neutrino factories, waste transmuters and tritium production facilities. The UK's commitment to the development of the next generation of HPPAs is demonstrated by a test stand being constructed in collaboration between RAL, Imperial College London, the University of Warwick and the Universidad del Pais Vasco, Bilbao. The aim of the RAL Front End Test Stand is to demonstrate that chopped low energy beams of high quality can be produced and is intended to allow generic experiments exploring a variety of operational conditions. This paper describes the current status of the RAL Front End Test Stand.

BACKGROUND

In order to minimise the need for remote or active handling of accelerator components, beam loss in future HPPAs must be kept to levels comparable to those of current facilities. With beam powers an order of magnitude or more greater than those currently achieved, fractional beam loss must necessarily be reduced by a similar factor. Beam chopping is one approach to reducing loss and will be an important feature of the next generation of HPPAs.

Beam Chopping

In circular machines a significant source of beam loss occurs when the continuous linac beam is trapped and bunched in the ring RF bucket. Trapping efficiency can be improved with higher harmonic RF systems but to achieve the improvements necessary for MW scale beams, the linac beam must be chopped at the ring revolution frequency. This chopped beam allows for the ring RF bucket to be precisely filled with little trapping loss. The low levels of beam between bunches also reduces loss at extraction.

Everywhere downstream of the RFQ the linac beam has RF structure, this structure typically being at some 100s of MHz. Partially chopped bunches can occur in the linac if the chopping is not precisely synchronised with the linac beam RF bunch structure. With less charge than normal and possibly off axis or off momentum, these partially chopped bunches may lead to beam loss in the linac. The ideal is perfect chopping where the chopper

switches on and off in the time between two successive linac beam bunches which is typically a few ns. This very fast switching requirement coupled with the increasing stiffness and power of the beam at higher energies dictates that chopping is carried out at the front of the linac, downstream of the RFQ at around 2.5 – 3 MeV.

Front End Test Stand

The Front End Test Stand (FETS) project at RAL [1][2][3][4] has several goals. The primary goal is to demonstrate a high quality, high current, chopped H⁻ beam. This is a generic objective and does not have a single future application in mind. FETS is funded by the Science and Technology Facilities Council (STFC) as part of their HPPA and Megawatt Spallation Source programme [5] and as a generic work package of the UK Neutrino Factory (UKNF) project [6].

A secondary goal of FETS is to encourage the study of accelerator technology within UK universities and foster international collaborations on HPPA research. High energy and particle physics has been well served by UK universities who are enthusiastic users of accelerator facilities and contributors to detector and physics projects however accelerator theory and technology has traditionally been less well served.

TEST STAND COMPONENTS

The front end test stand consists of an H⁻ ion source, magnetic low energy beam transport (LEBT), 324 MHz RFQ, medium energy beam transport (MEBT) chopper line and comprehensive diagnostics.

Ion Source

FETS will use an ion source based on the well-proven and highly successful Penning type H⁻ surface plasma source (SPS) [7] which is in routine operation on ISIS producing currents in excess of 50 mA at a duty factor of ~1%. Its use with an RFQ pre-injector has been previously demonstrated [8].

Following previous work which concentrated on increasing the current and duty factor of the source [9][10][11], recent work has focussed on understanding the beam transport and optics with a view to decreasing the emittance to the FETS specification. Considerable experimental and computational effort, using CST EM & Particle Studies [12] plus General Particle Tracer (GPT) [13], is leading to a much better understanding of the

beam behaviour [14][15][16]. Figure 1 shows the predicted and measured beam profile at low extraction voltage.

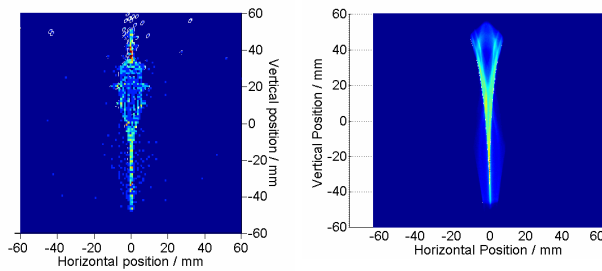


Figure 1: Left, simulated and right, measured beam profile.

In addition to furthering the theoretical understanding, installation of the ion source infrastructure in the FETS building at RAL is nearing completion [17]. Figure 2 shows part of the installation. First beam is anticipated in autumn 2008.



Figure 2: The high voltage cage and 65 kV high voltage platform.

Magnetic LEBT

A 3 solenoid magnetic LEBT has been chosen for FETS [18][19]. In part this decision was informed by the successful combination of such a LEBT with the Penning ion source in the ISIS RFQ pre-injector upgrade [8]. An electrostatic Einzel lens LEBT, although offering some advantages, was rejected for this application due to fears about operating such a LEBT in close proximity to the highly caesiated ion source.

Figure 3 shows the simulated beam envelopes in the LEBT, calculated with GPT and based on the latest ion source measurements. Calculations suggest that from 0 – 100% space charge neutralisation can be accommodated by varying the solenoid fields.

Manufacture of the solenoids has been completed by Elytt/Neureus in Spain.

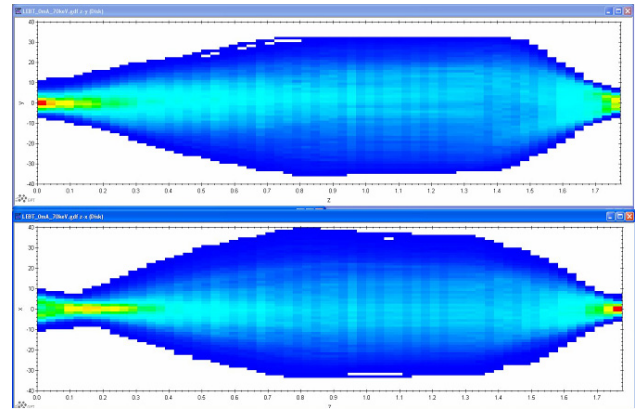


Figure 3: LEBT beam envelopes calculated with GPT.

Design of the LEBT support structures is complete with 2 of the 3 solenoids installed. Figure 4 shows the full LEBT design and one of the completed solenoids.

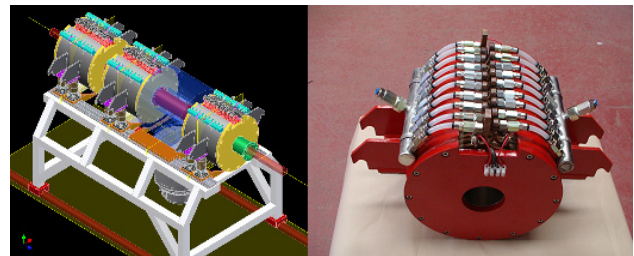


Figure 4: Layout of the FETS LEBT and one of the completed solenoids from Elytt.

RFQ

A frequency of 324 MHz has been chosen for the FETS RFQ, determined by the ready availability of the Toshiba E3740A klystron developed for the JPARC linac [20]. One of these klystrons has been purchased and is at RAL. A contract has been signed for a HV power supply and solid-state modulator from Diversified Technologies, Inc [21] for delivery late in 2008.

A design for a 4-vane RFQ is well advanced with a cold model completed and extensively measured and compared to simulations [22][23][24]. Figure 5 shows the cold model during tests at Imperial College.

MEBT and Chopper

FETS will use the novel fast-slow chopper scheme developed at RAL [25][26]. Having previously demonstrated operation of the ‘fast’ high voltage pulser, attention has now focussed on the ‘slow’ pulser [27] and prototyping the slow wave deflector structures [28].

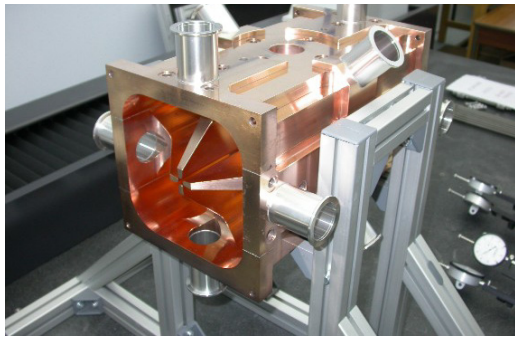


Figure 5: The RFQ cold model under test at Imperial College.

An optical design has been chosen as the FETS baseline for the MEBT. Compact PMQ/EMQ magnets are under investigation [29]. It is hoped to develop cavity cold models soon.

Diagnosics

High quality diagnostics are essential to fully exploit the test stand. In addition to a suite of traditional diagnostics devices, non-destructive laser stripping techniques will also be employed. Non-destructive techniques are attractive due to the high beam power. A laser stripping transverse emittance measurement system is under investigation [30] as is a laser wire beam tomography system for determining beam density profiles [31]. The laser diagnostic vessel is manufactured and ready for installation.

REFERENCES

- [1] D.J.S. Findlay et al, "The RAL Front End Test Stand", Proc. NuFact04, Osaka University, Japan, Aug 2004.
- [2] A.P. Letchford et al, "The RAL Front End Test Stand", EPAC'06, Edinburgh, Scotland, June 2006.
- [3] J.J. Back et al, "Progress at the RAL Front End Test Stand", Nucl Phys B (Proc Suppl) 155 309-311.
- [4] A.P. Letchford et al, "Status Report on the RAL Front End Test Stand", PAC07, Albuquerque, NM, USA, Jun 2007.
- [5] J. Thomason et al, "Megawatt Upgrades for the ISIS Facility", EPAC'08, Genoa, Italy, June 2008.
- [6] <http://hepunx.rl.ac.uk/uknf>.
- [7] D.C. Faircloth, et al, "Understanding Extraction and Beam Transport in the ISIS H- Penning Surface Plasma Ion Source", Review Of Scientific Instruments 79, 02b717 2008.
- [8] A.P. Letchford et al, "Testing, Installation, Commissioning and First Operation of the ISIS RFQ Pre-injector Upgrade", PAC05, Knoxville, May 2005.
- [9] D.C. Faircloth and J.W.G. Thomason, "Extending the Duty Cycle of the ISIS H- ion source, Thermal Considerations", EPAC'04, Lucerne, June 2004.
- [10] D.C. Faircloth et al, "Thermal Modeling of the ISIS H- Ion Source", Review of Scientific Instruments, Volume 75, Number 5, May 2004.
- [11] D.C. Faircloth et al, "Practical experience in Extending the Ion Source and Injection System H-Ion Source Duty Cycle", Rev. Sci. Instrum. 77, 03A520 (2006), March 2006.
- [12] CST Ltd., Bad Nauheimer Strasse 19, 64289 Darmstadt, Frankfurt, Germany <http://www.cst.de>.
- [13] Pulsar Physics, Burghstraat 47, 5614 BC, Eindhoven, The Netherlands, <http://www.pulsar.nl>.
- [14] D.C. Faircloth et al, "Study of the Post Extraction Acceleration Gap in the ISIS H Penning Ion Source", EPAC'08, Genoa, Italy, June 2008.
- [15] S.R. Lawrie et al, "Redesign Of The Analysing Magnet In The ISIS H- Penning Ion Source", 1st International Conference on Negative Ions, Beams and Sources, Aix-en-Provence, France, Sep 2008.
- [16] D.C. Faircloth et al, "Multi-Beamlet Study Of Beam Transport In The Isis H- Ion Source Analysing Magnet", EPAC'08, Genoa, Italy, June 2008.
- [17] D.C. Faircloth et al, "Installation Of The Front End Test Stand High Performance H- Ion Source", EPAC'08, Genoa, Italy, June 2008.
- [18] A.P. Letchford et al, "The RAL Front End Test Stand", EPAC'06, Edinburgh, Scotland, June 2006.
- [19] S. Jolly et al, "LEBT Simulations and Ion Source Beam Measurements for the Front End Test Stand (FETS)", EPAC'06, Edinburgh, Scotland, June 2006.
- [20] <http://www.toshiba-tetd.co.jp/eng/>.
- [21] <http://www.divtecs.com/>.
- [22] A Kurup, A.P. Letchford, "Electromagnetic Design of a Radio Frequency Quadrupole for the Front End Test Stand at RAL", EPAC'06, Edinburgh, Scotland, June 2006.
- [23] P. Savage et al, "Mechanical Design and RF Measurement on RFQ for Front-end Test Stand at RAL", EPAC'06, Edinburgh, Scotland, June 2006.
- [24] D.A. Lee et al, "Detailed Study of the RF Properties of the FETS RFQ Cold Model", EPAC'08, Genoa, Italy, June 2008.
- [25] M.A. Clarke-Gayther, "Modulator Systems for the ESS 2.5 MeV Fast Chopper", PAC01, Chicago, USA, June 2001.
- [26] M.A. Clarke-Gayther, "A Fast Beam Chopper for Next Generation High Power Proton Drivers", EPAC'04, Lucerne, Switzerland, July 2004.
- [27] M.A. Clarke-Gayther, "The Development of a Fast Beam Chopper for Next Generation High Power Proton drivers", EPAC'08, Genoa, Italy, June 2008.
- [28] M.A. Clarke-Gayther, "Slow-wave chopper structures for next generation high power proton drivers", PAC07, Albuquerque, NM, USA, Jun 2007.
- [29] C. Plostinar, M.A. Clarke-Gayther, "Hybrid Quadrupoles Designs for the RAL Front End Test Stand (FETS)", EPAC'08, Genoa, Italy, June 2008.
- [30] C. Gabor et al, "Laser-based Beam Diagnostic for the Front End Test Stand (FETS) at RAL", EPAC'06, Edinburgh, Scotland, June 2006.
- [31] D.A. Lee et al, "Laser-based Ion Beam Diagnostics for the Front End Test Stand at RAL", EPAC'08, Genoa, Italy, June 2008.