

The beam already knows what emittance it should deliver, we just have to measure it !

## Content:

- measurement setup
- cathode laser
- different guns
- longitudinal phase space
- transverse projected emittance
- cathode studies
- future upgrades of the facility


# The PITZ collaboration

## Colleagues actively participating in measurements / new design:



- **DESY, Zeuthen site:**  
F. Stephan, J. Bähr, C. Boulware, H.J. Grabosch, Y. Ivanisenko\*, S. Khodyachykh, S. Korepanov, M. Krasilnikov, A. Oppelt\*\*, B. Petrosyan, S. Riemann, S. Rimjaem, K. Rosbach, A. Shapovalov\*\*\*, T. Scholz, R. Spesyvtsev\*\*\*\*, L. Staykov
  - **DESY, Hamburg site:**  
K. Flöttmann, J.H. Han, S. Lederer, S. Schreiber
  - **BESSY Berlin:**  
T. Kamps, F. Marhauser\*\*\*\*\*, R. Ovsyannikov, D. Richter, A. Vollmer
  - **CCLRC Daresbury:**  
D.J. Holder, B.D. Muratori
  - **INRNE Sofia:**  
G. Asova, K. Boyanov, I. Tsakov
  - **INR Troitsk:**  
A.N. Naboka, V. Paramonov, A.K. Skassyrskaya
  - **Acknowledgements:** R. Brinkmann, U. Gensch, E. Jaeschke, L. Kravchuk, V. Nikoghosyan, C. Pagani, L. Palumbo, J. Rossbach, W. Sandner, S. Smith, T. Weiland, G. Wormser
  - **LAL Orsay:**  
T. Garvey\*\*
  - **LASA Milano:**  
P. Michelato, L. Monaco, D. Sertore
  - **LNF Frascati:**  
D. Alesini, L. Ficcadenti
  - **MBI Berlin:**  
G. Klemz, I. Will
  - **TU Darmstadt:**  
W. Ackermann, E. Arevalo, W. Müller, S. Schnupp
  - **Uni Hamburg:**  
J. Rönsch
  - **YERPHI Yerevan:**  
L. Hakobyan
- \* on leave from IERT Kharkov,  
\*\* now at PSI, Villingen,  
\*\*\* on leave from MEPhI, Moscow,  
\*\*\*\* on leave from NSCIM, Kharkov,  
\*\*\*\*\* now at JLAB, Newport News

# Present layout of PITZ

This setup was used for the measurements to be presented:

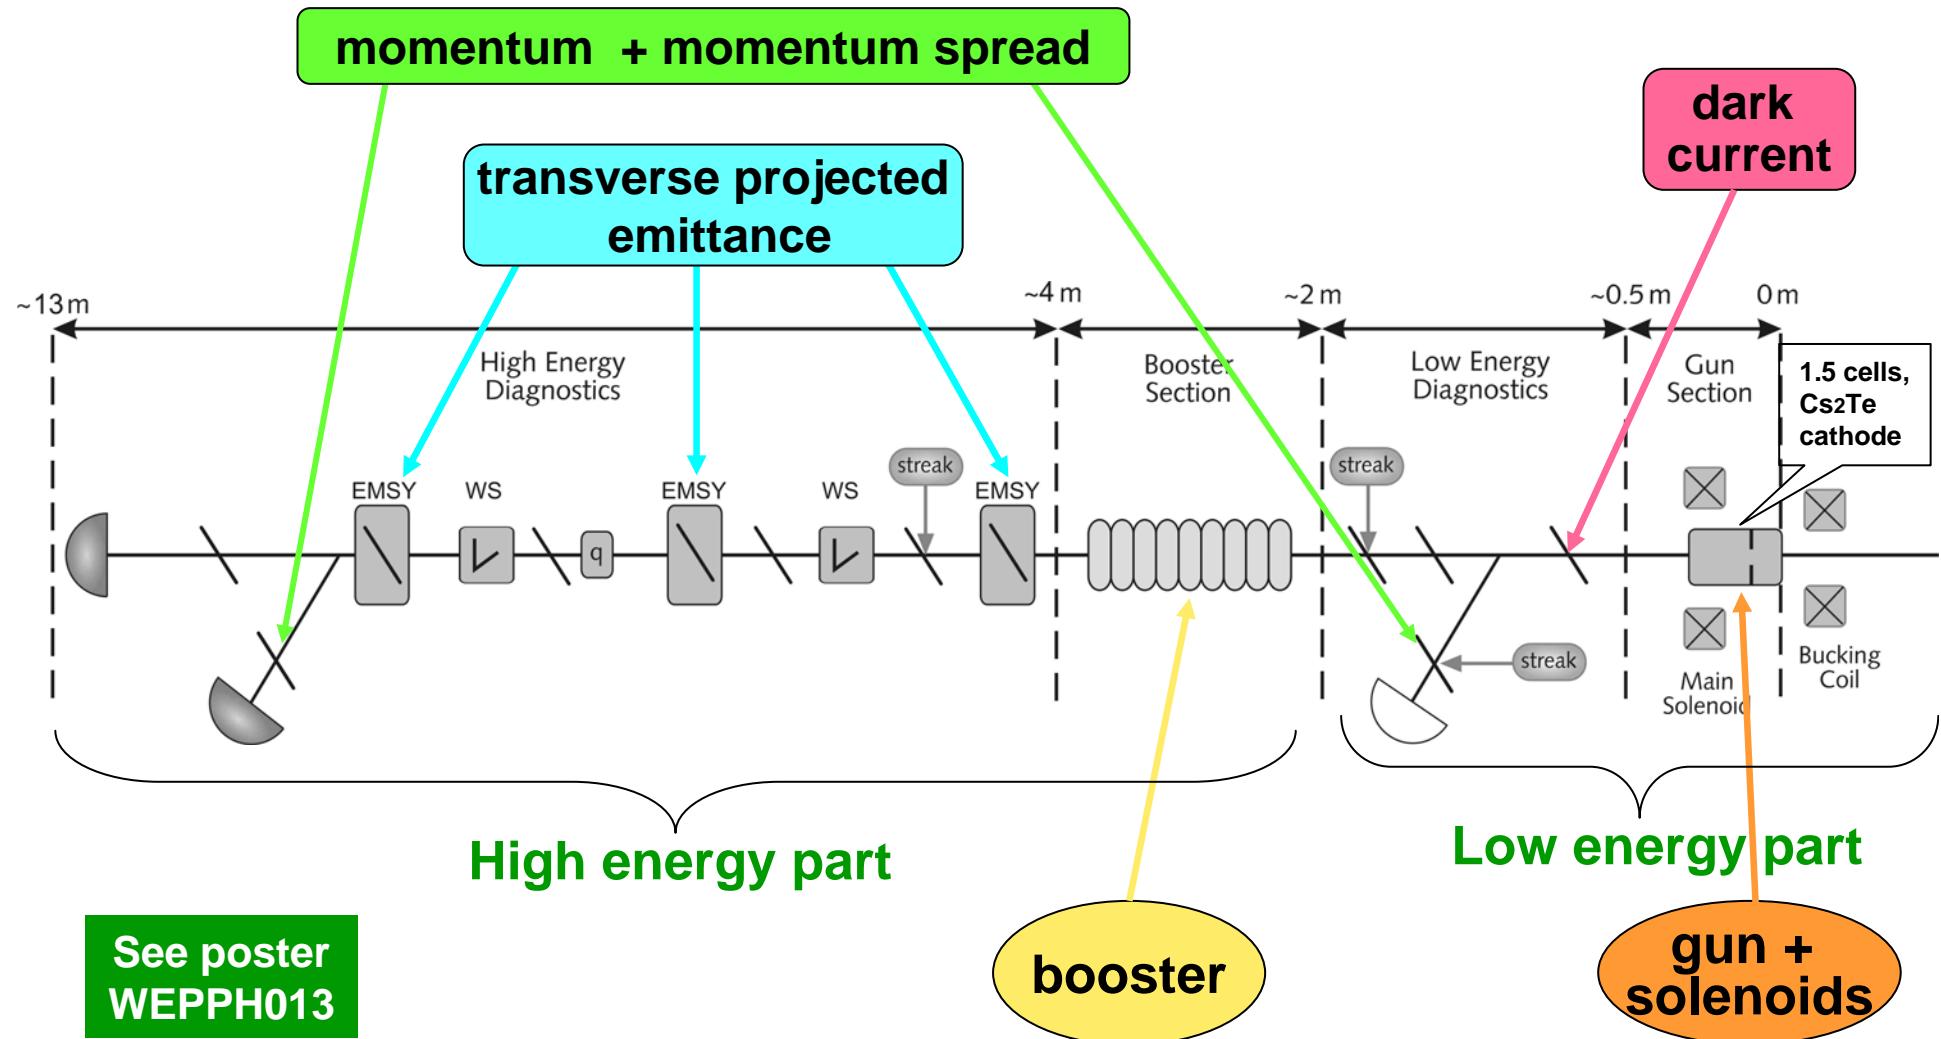


# Present layout of PITZ

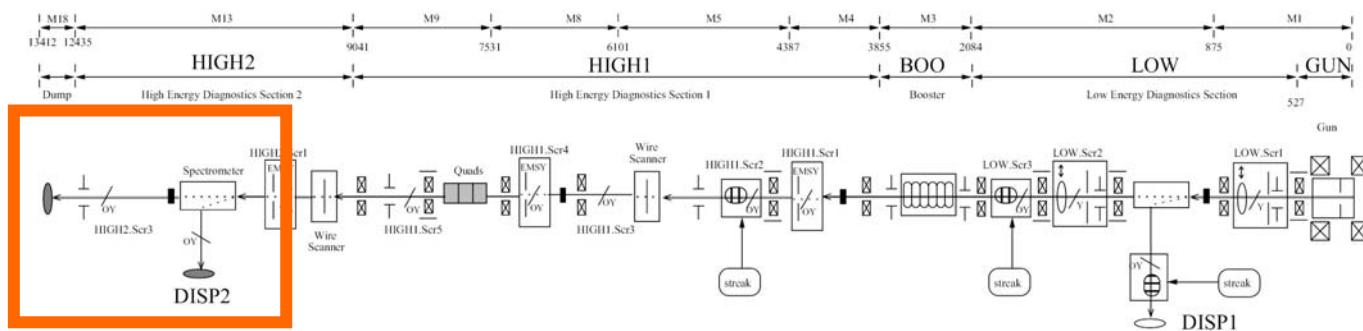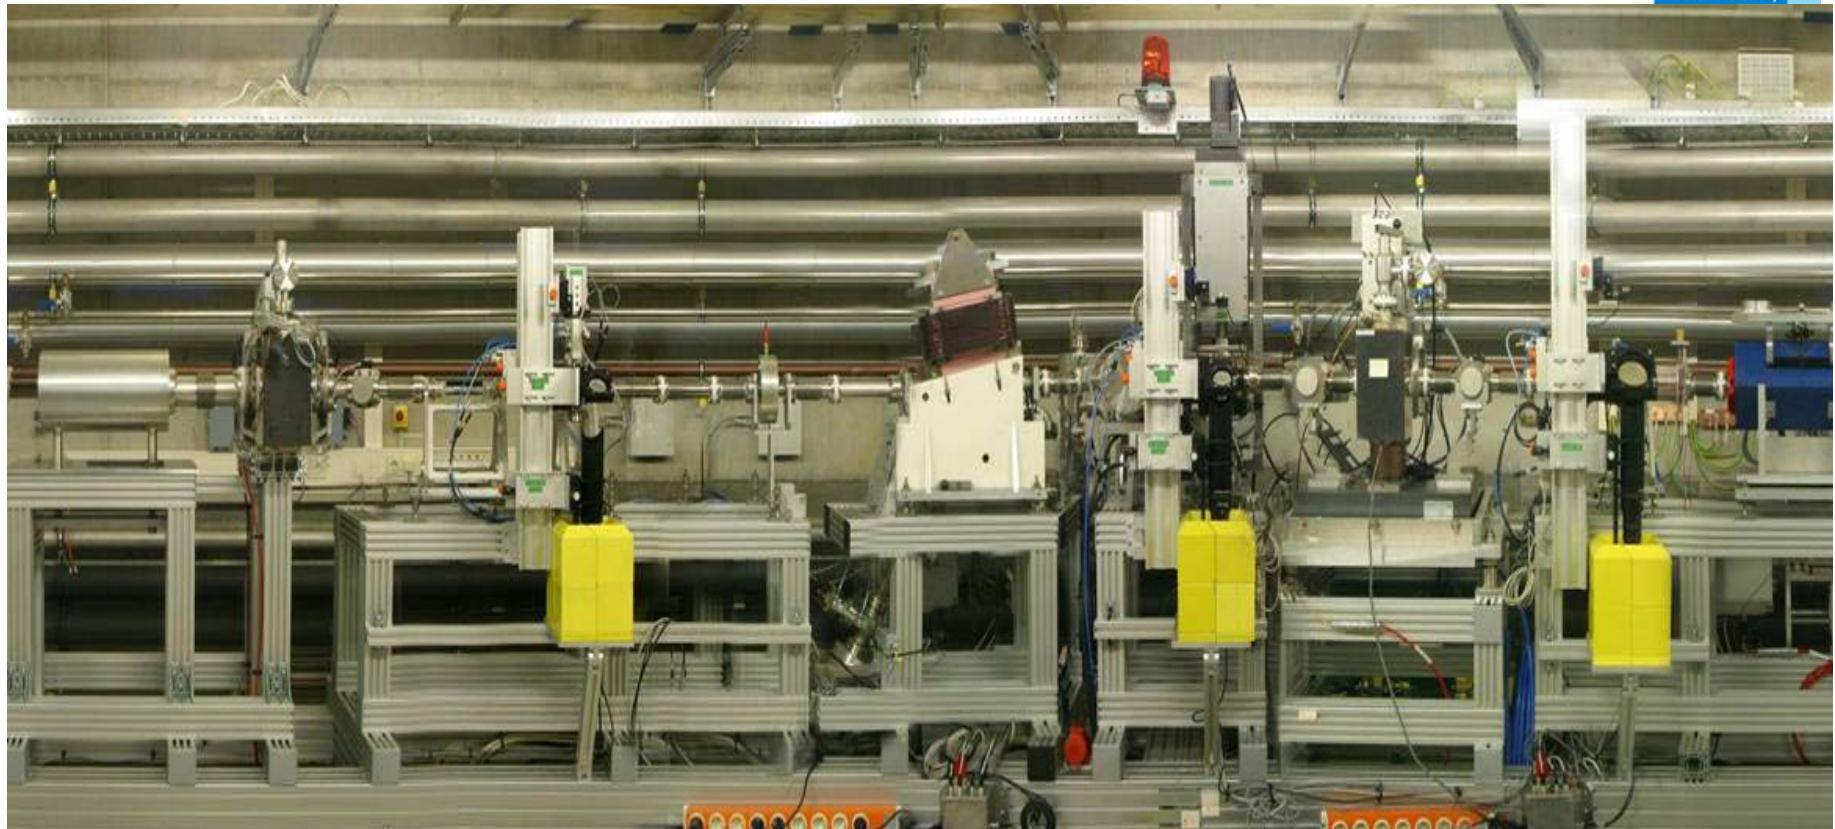


Version 6.2.07


# Photo cathode laser

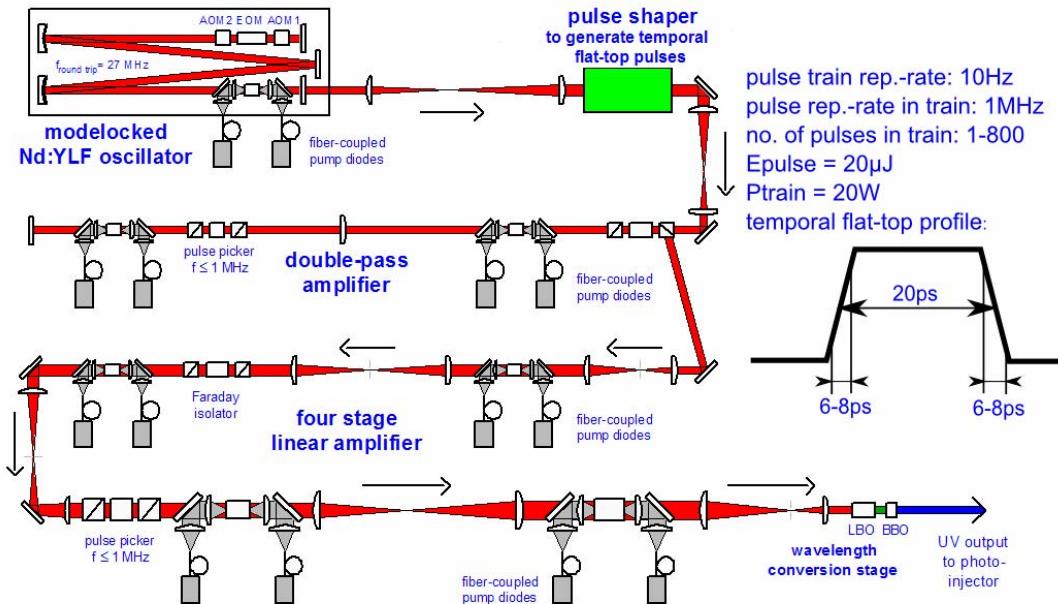

Schematics of the diode-pumped Nd:YLF photo cathode laser system

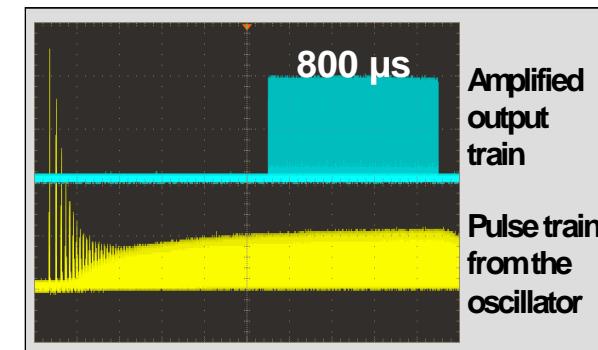


## Beamlne to photo cathode

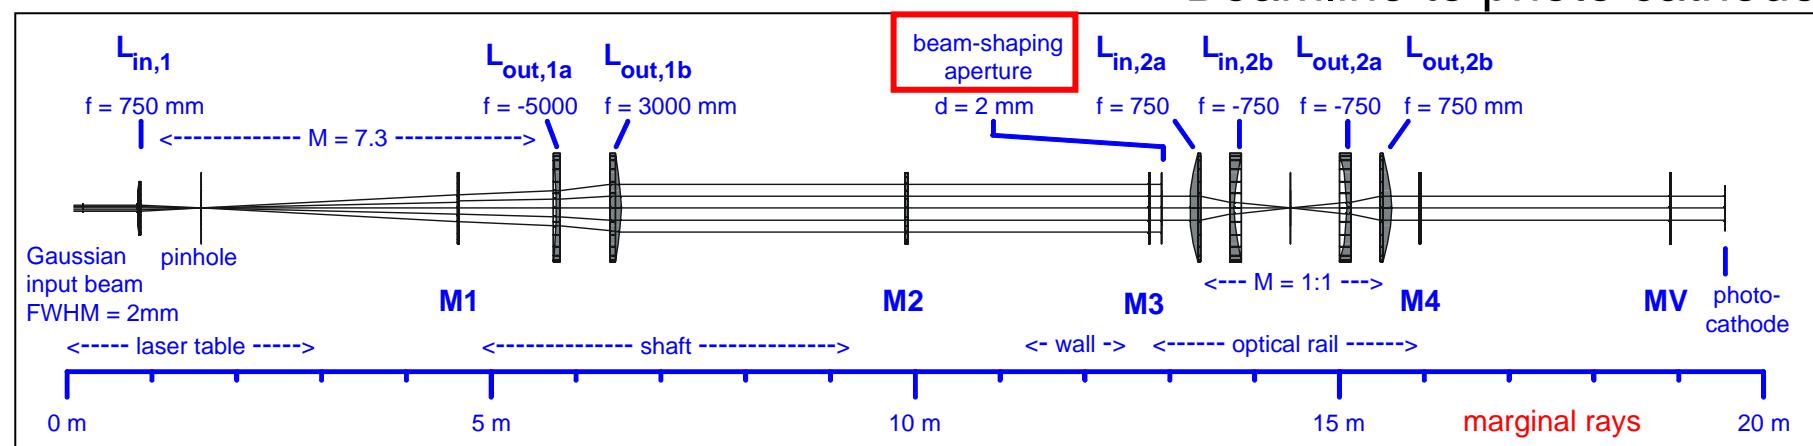


# Photo cathode laser properties

- longitudinal profile:


FWHM=20.22ps; rt1=6.58ps; rt2=6.67ps; FTmod=6.52%

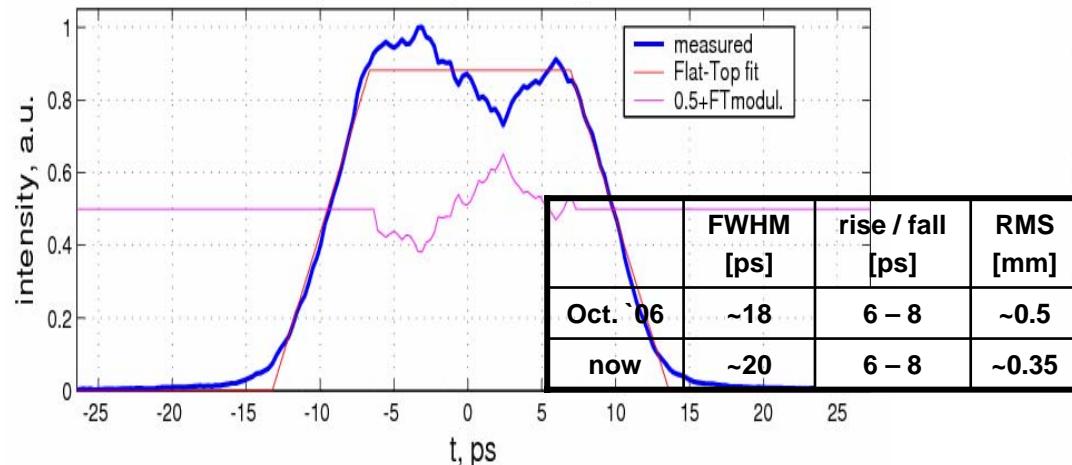

- transverse profile:

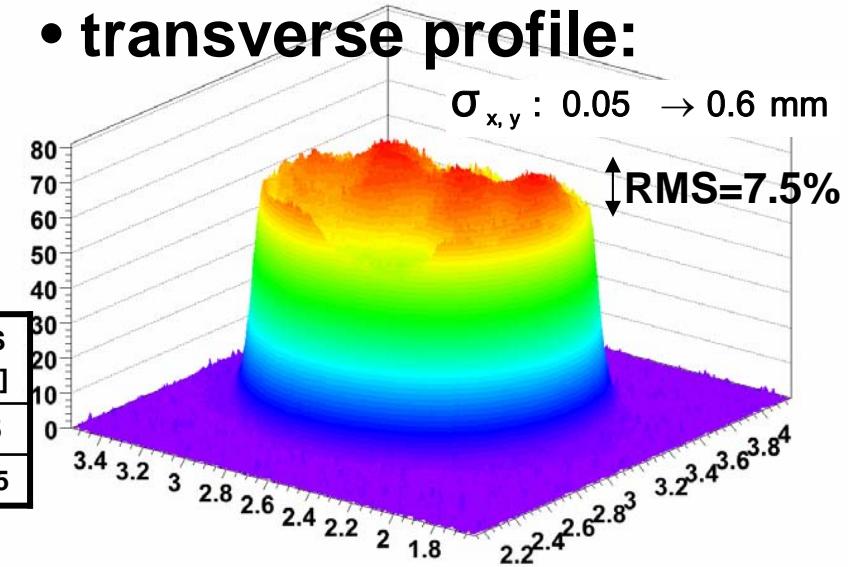


- energy stability:

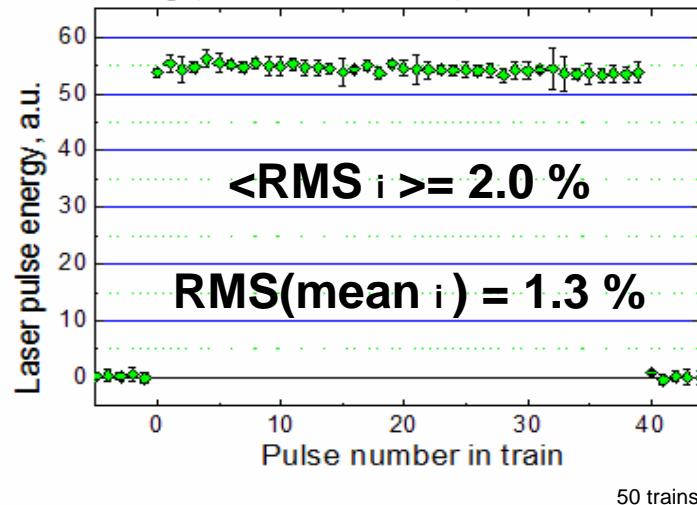

See poster  
WEPPH011

- pointing stability:

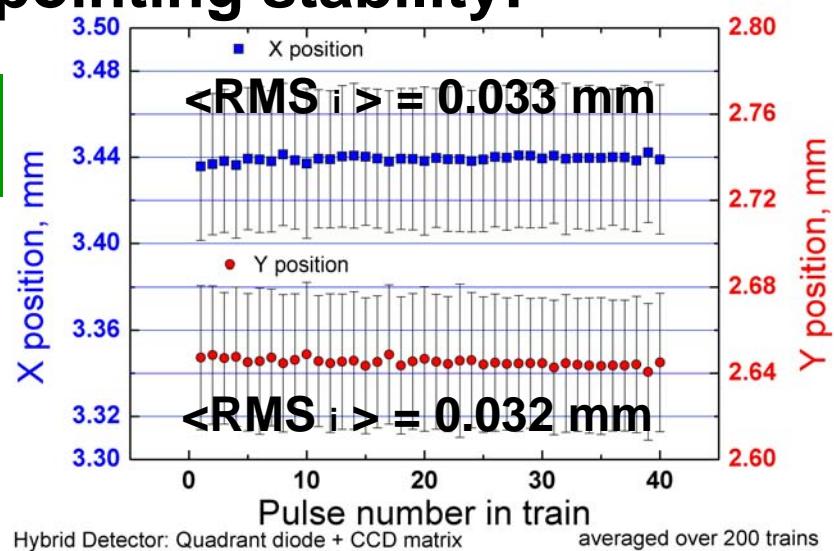


# Guns, Gradients, Dark Currents


- **Gun 3.1 –**

characterized @ ~40MV/m in Oct. '06  
→ spare gun for FLASH

- **Peak and average power:**

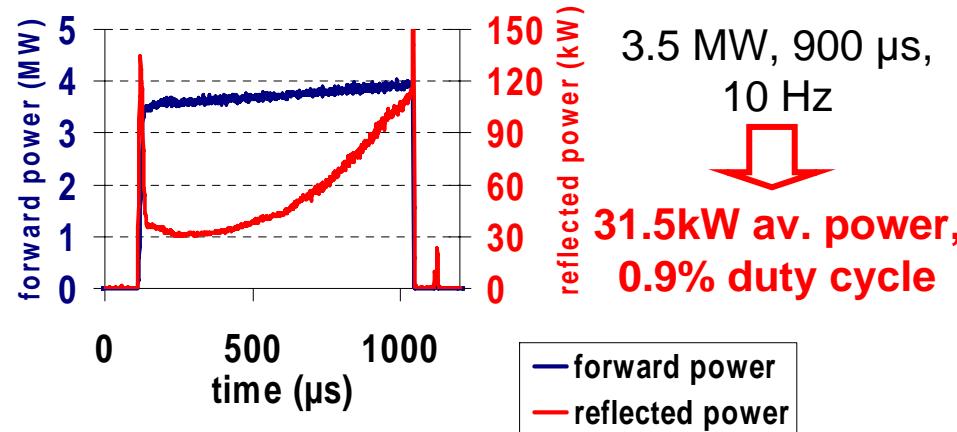


- **Dark current:**

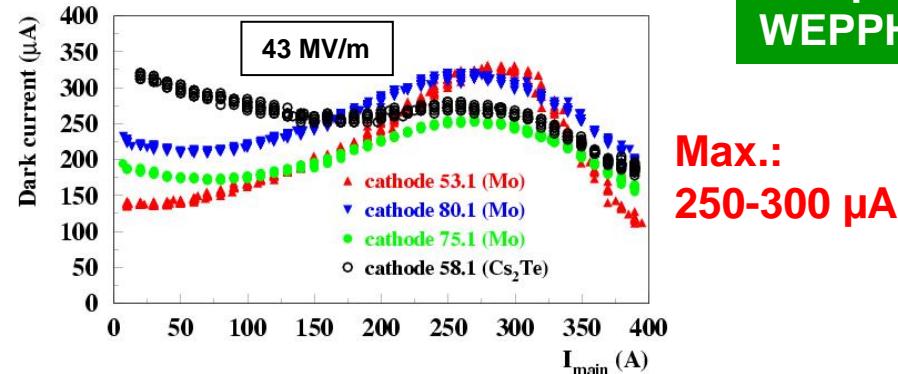


- **Gun 3.2 –**

characterized @ ~60MV/m in summer '07  
→ first experience with long RF at 60 MV/m


- **Peak and average power:**

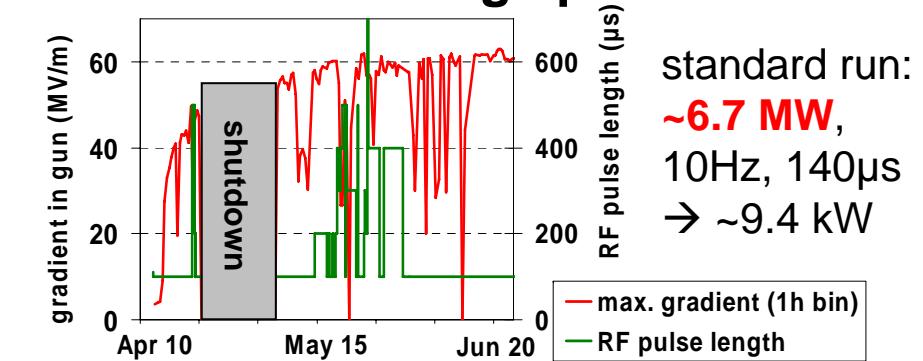

- **Dark Current:**

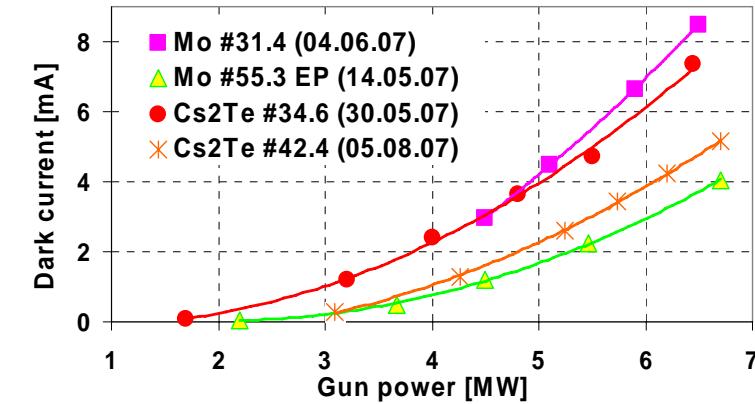

→ very high ! → possible reason: cavity fabrication error in cathode region


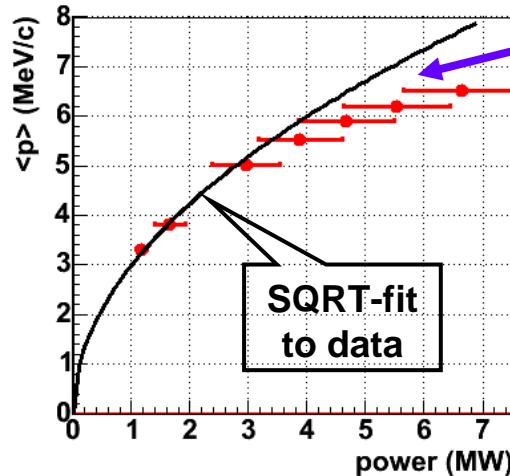


**Problem with maximum momentum:**


- measured momentum lower than expected from RF power readings
- possible reason:  
→ power measurements

For more details and bunch length measurements see poster WEPPH009

**Momentum and momentum spread downstream of the gun:**

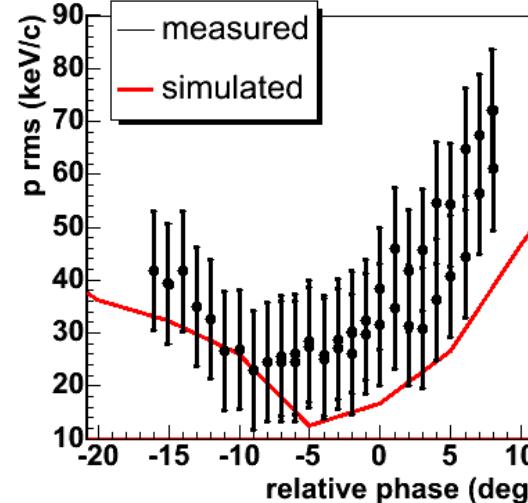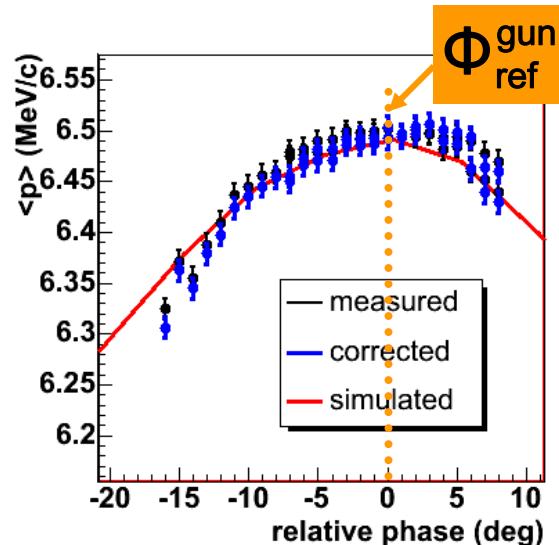

**Momentum and momentum spread downstream of the booster:**

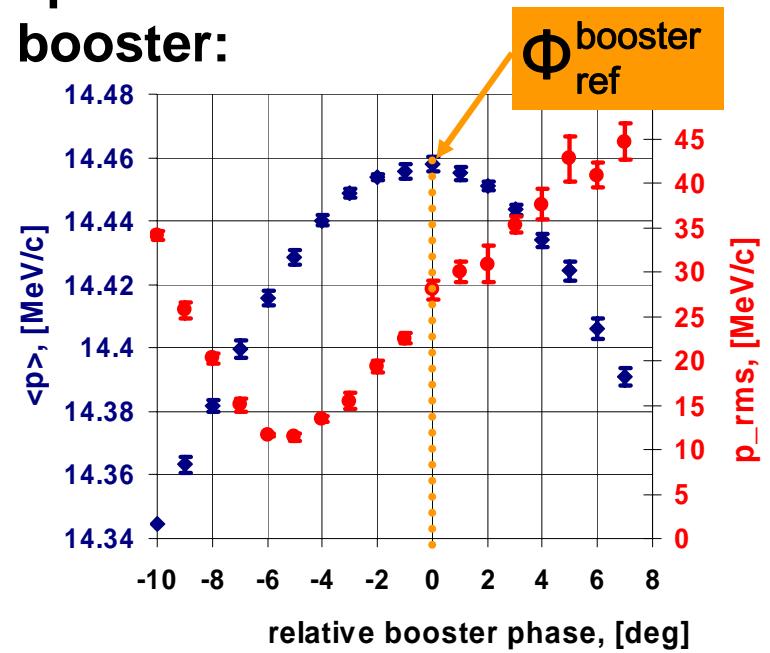

# Projected Emittance Measurements: → Slit Scan Technique

$$\mathcal{E}_{x,n} = \beta\gamma \cdot X_{rms} \cdot X'_{rms}$$



$X_{rms}$  - RMS size of full beam at EMSY station (e.g. z = 4.3m )

$$X'_{rms} = \frac{1}{L} \sqrt{\sum_{i=1}^n w_i \cdot (X_{rms}^{beamlet})_i^2 / \sum_{i=1}^n w_i} \quad \text{- uncorrelated local divergence}$$

$X_{rms}^{beamlet}$  - RMS size of the beamlet image

L - distance from slit location to screen for beamlets

See poster  
**MOPPH055**

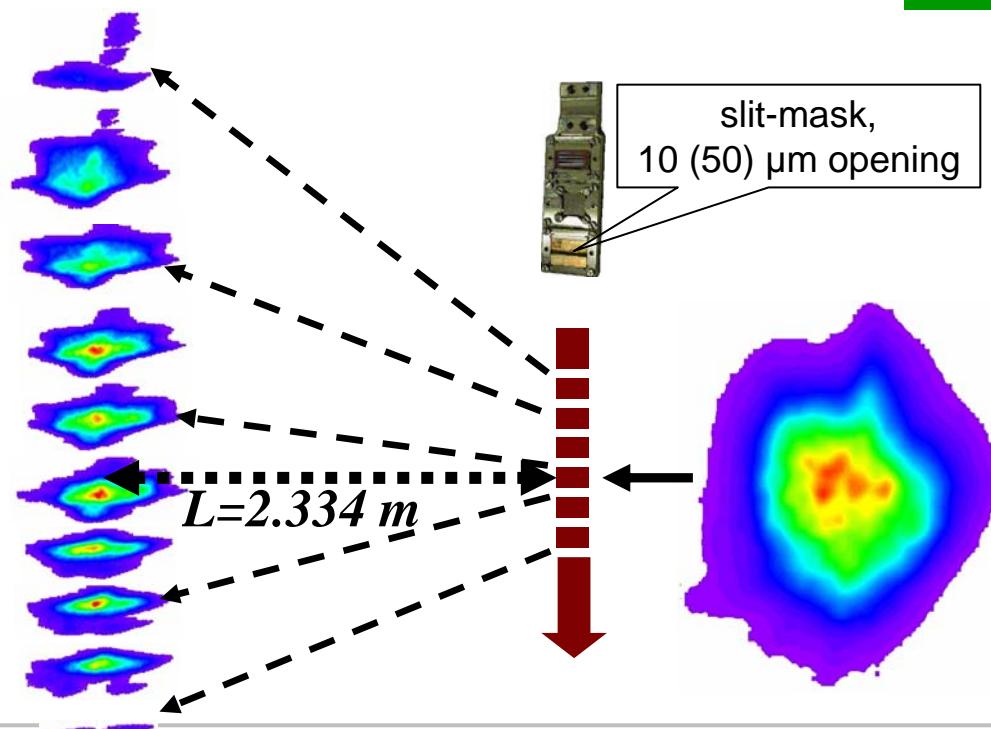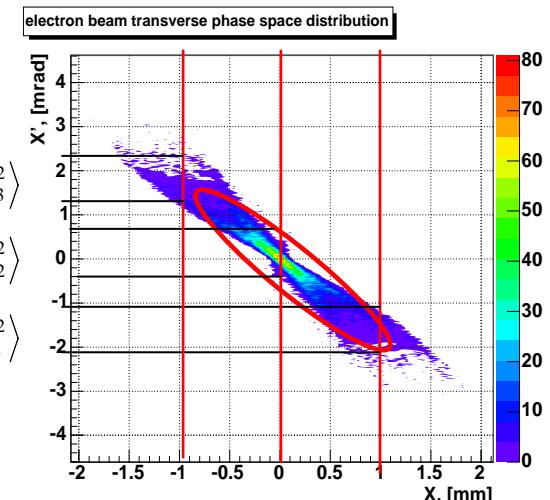

- **Current standard procedure:**
  - take 11 equidistant beamlets over the full beam size
  - use 10  $\mu\text{m}$  slit opening
- ultimate resolution (current setup):  
 $\rightarrow 36\mu\text{m} \times 15.4 \mu\text{rad}$
- use camera with 12 bit signal depth for beamlet measurements



Gun gradient:  $\sim 43\text{MV/m}$

Gun phase:  $\Phi^{\text{gun}} = \Phi_{\text{ref}}^{\text{gun}} - 2 \text{ deg}$

Momentum from gun:  $\sim 5.0 \text{ MeV/c}$

Booster phase:  $\Phi^{\text{booster}} = \Phi_{\text{ref}}^{\text{booster}} - 5 \text{ deg}$

Total beam momentum:  $12.8 \text{ MeV/c}$

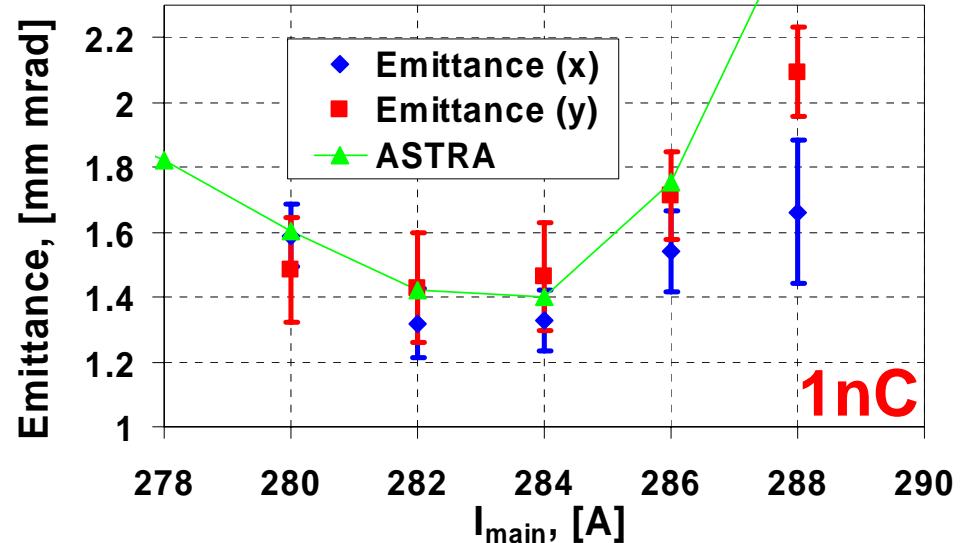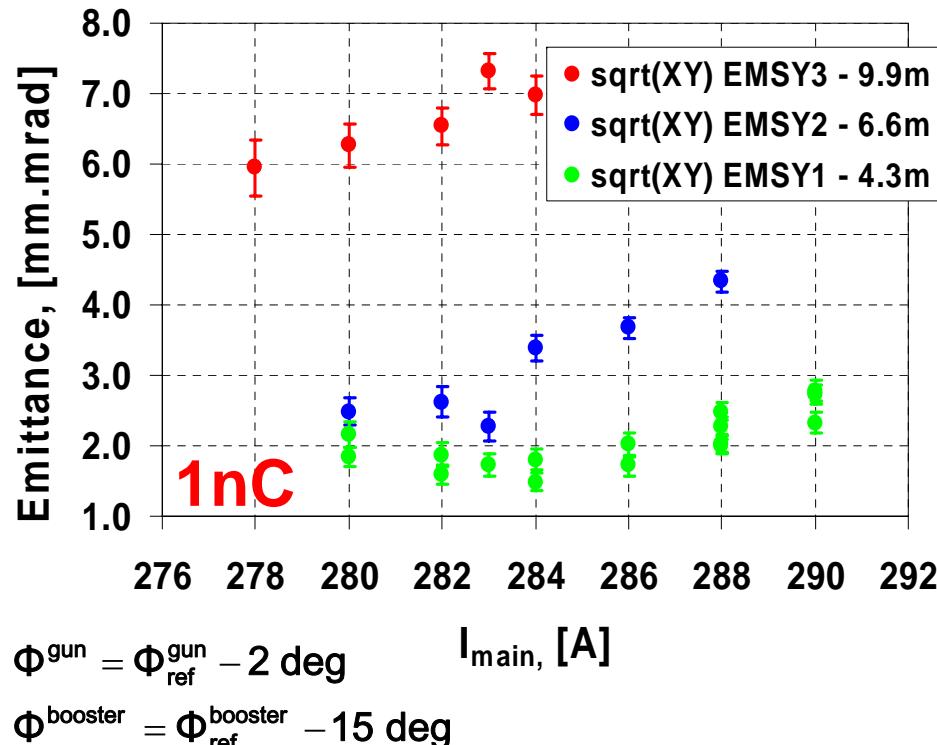

→ for 43 MV/m we obtained

$$\varepsilon_{x,n} = 1.32 \pm 0.11 \text{ mm mrad}$$




$$\varepsilon_{y,n} = 1.43 \pm 0.17 \text{ mm mrad}$$

@1nC

→ emittance strongly increases with distance from booster

See poster MOPPH055

# Expectations for 60 MV/m

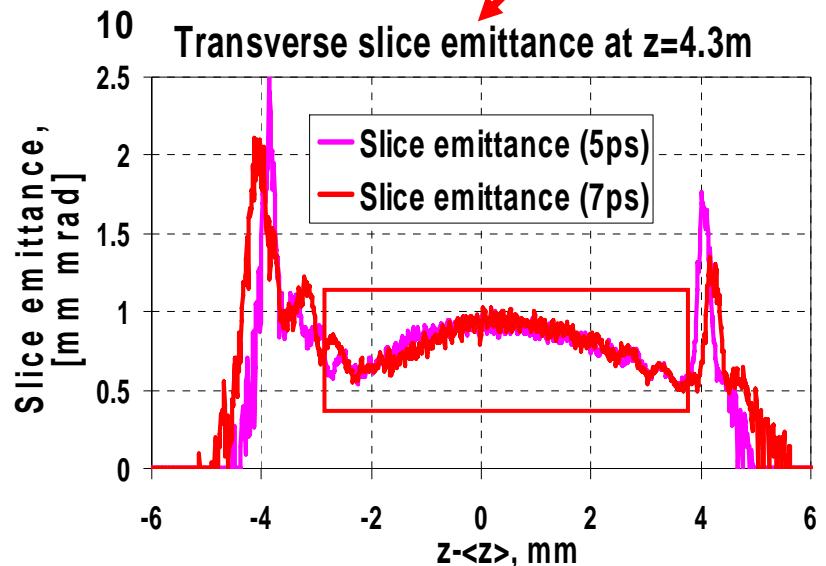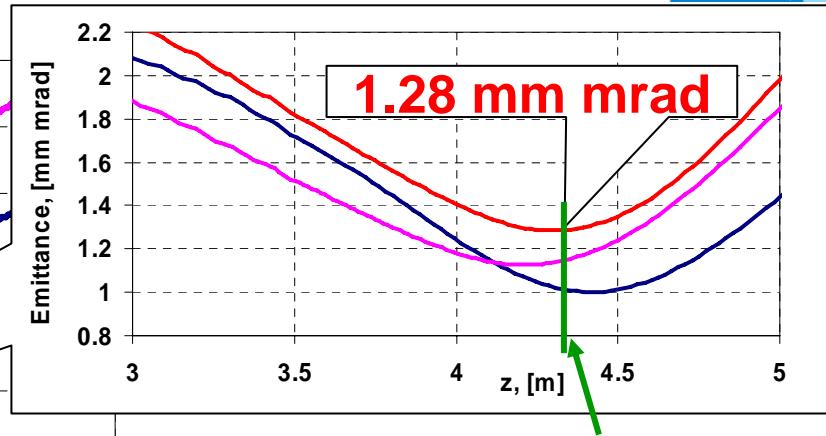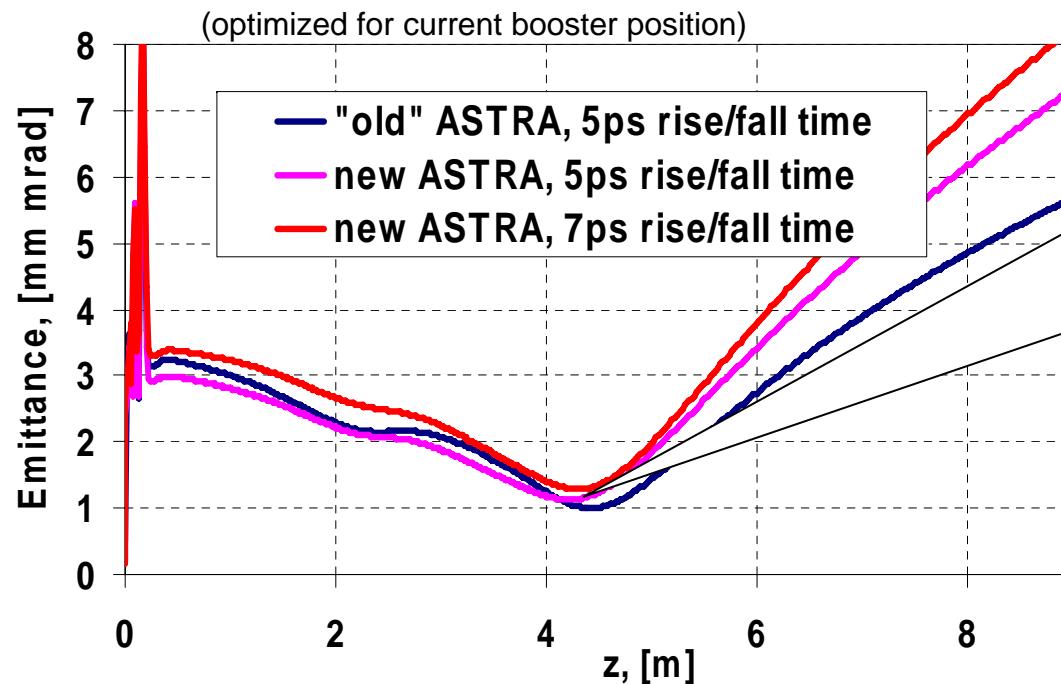


## What's new in new ASTRA (spring '07)?


- solved convergence problem of space charge routine for very short bunches  
→ important during emission,
- included new parameter to control time steps  
→ important when bunch just left cathode

# Emittance for 1 nC and 60 MV/m

preliminary analysis

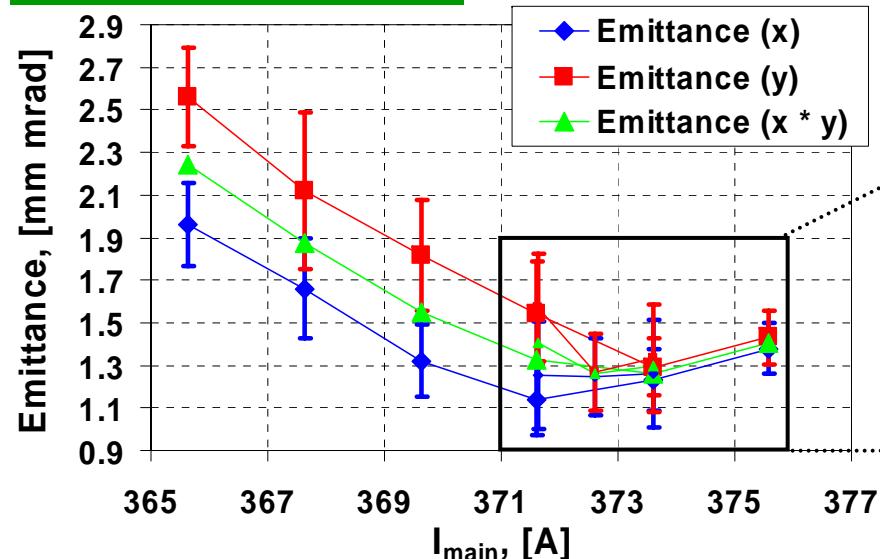

zoom  
→

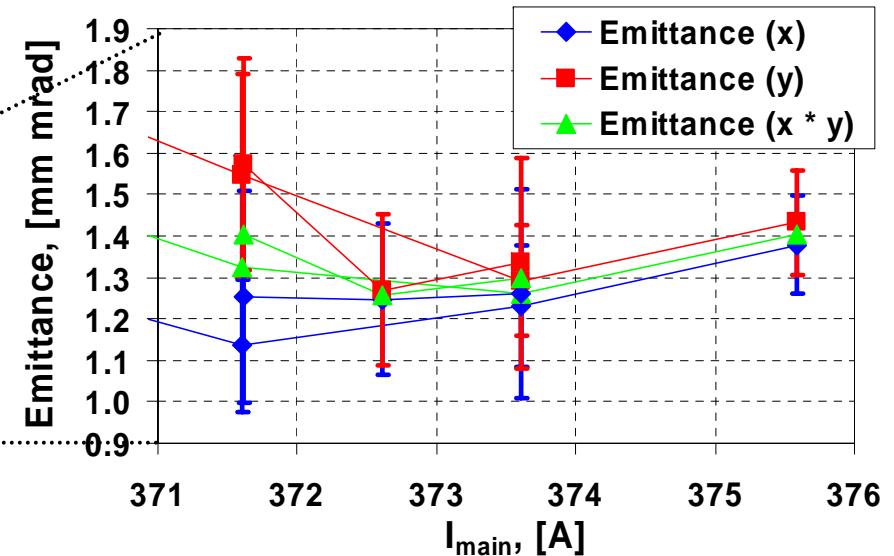

Cathode: # 90.1

Gun gradient: ~ 60 MV/m

Gun phase:  $\phi^{\text{gun}} = \phi^{\text{gun}}$

Momentum from gun: ~ 6.44 MeV/c

Booster phase:  $\phi^{\text{booster}} = \phi^{\text{booster}}$

Total beam momentum: 14.5 MeV/c

See poster MOPPH055

→ for ~60 MV/m we obtained

$$\begin{aligned} \epsilon_{x,n} &= 1.25 \pm 0.19 \text{ mm mrad} \\ \epsilon_{y,n} &= 1.27 \pm 0.18 \text{ mm mrad} \end{aligned}$$



@1nC

for 100 % RMS emittance !



→ good agreement with prediction from ASTRA

preliminary analysis

**x-x'-phase space distribution for the best emittance measurement,  
purely reconstructed from subsequent beamlet measurements:**

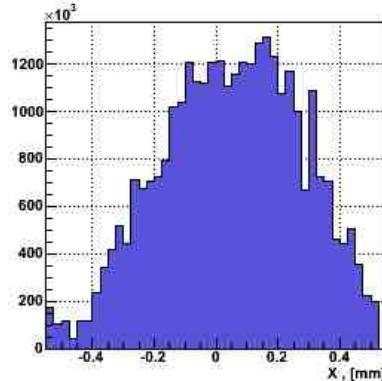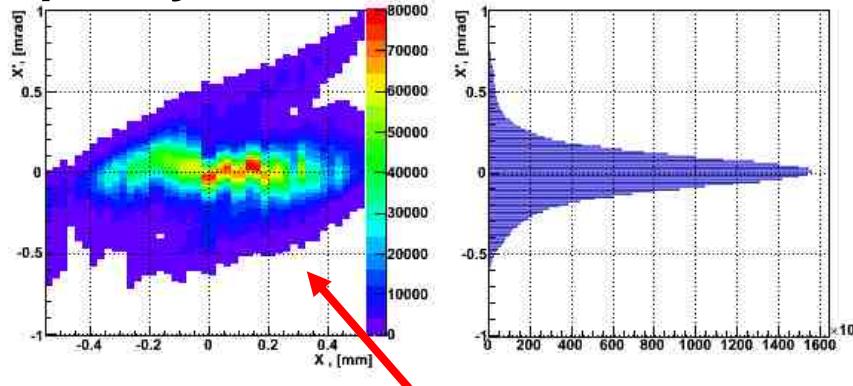

Emittance calculated  
purely from beamlet  
measurements,  
100 % of data  
 $\rightarrow \epsilon_n = 1.1 \text{ mm mrad}$

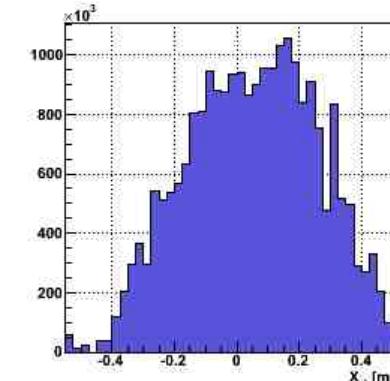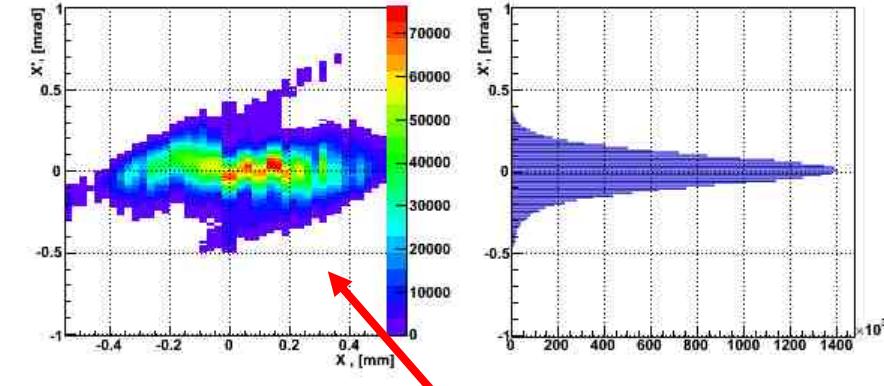

Cut at 5% of max.  
amplitude (i.e. 6.5%  
of "charge") [reasons:  
noise, gain, sensitivity,  
bit depth, ...]  
 $\rightarrow \epsilon_n = 0.69 \text{ mm mrad}$


**projected emittance is reduced by 37 % !!**

**ASTRA: - 5% in particles  $\rightarrow$  -38% in proj. emittance**


**For 95% RMS  $\rightarrow \epsilon_{x,y,n} \approx 0.8 \text{ mm mrad}$**

Reminder: This  $\epsilon_n \neq 1.25 \text{ mm mrad}$   
because the separately measured beam  
size at the slit position is NOT taken into  
account here.

Te 3d spectrum for **fresh** cathode #90.1

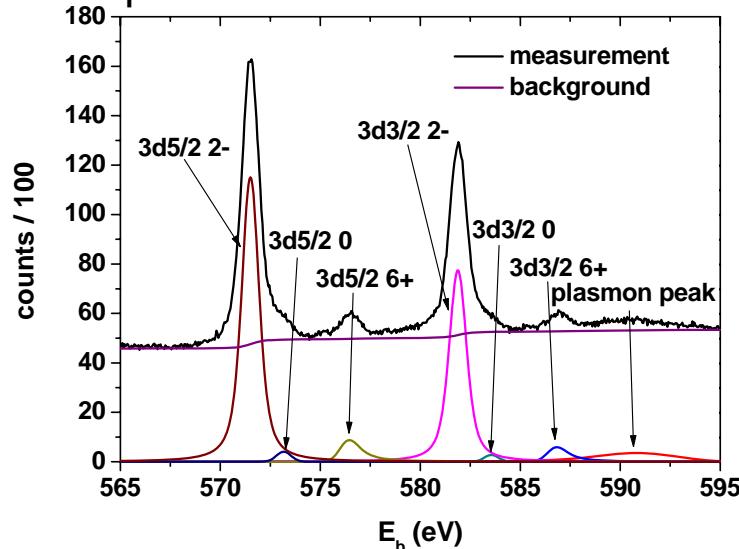

Te 3d spectrum for **used** cathode #92.1

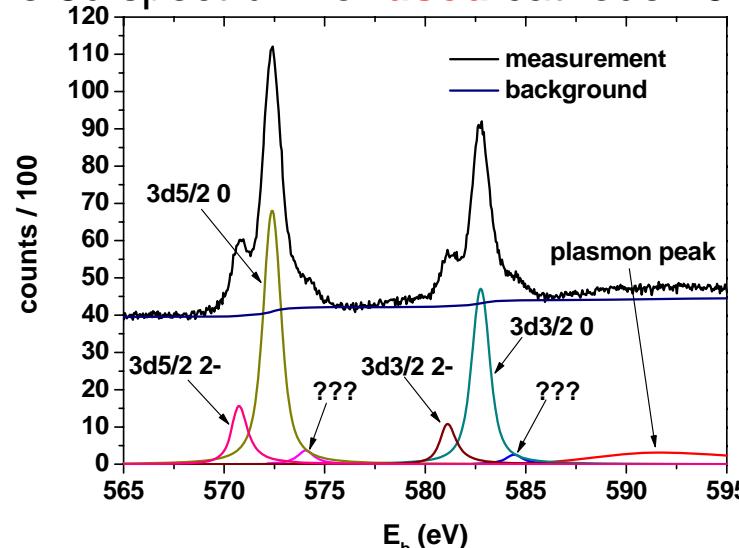

See poster WEPPH048

## fresh cathode:

- dominant peaks for both spin-orbit couplings corresponding to  $\text{Te}^{-2}$  ( $\text{Cs}_2\text{Te}$ )
- small amounts of  $\text{Te}^0$

## used cathode:

- dominant peaks for both spin-orbit couplings corresponding to  $\text{Te}^0$  (metallic tellurium)
- only small amounts of  $\text{Te}^{-2}$  ( $\text{Cs}_2\text{Te}$ )

## Confirmation from survey scan:

$\text{Te}^{+6}$  visible ( $\text{TeO}_3$ ) on fresh cathodes but no oxidized states on used cathodes

- **QE degradation during operation most probable related to change in chemical composition**
- **transition from  $\text{Cs}_2\text{Te}$  to metallic Te**


# Thermal emittance measurements

$$\mathcal{E}_{th} = \sigma_{cathode} \sqrt{\frac{2E_{kin}}{3m_0 c^2}}$$



$$\mathcal{E}_{meas} \approx \sqrt{\mathcal{E}_{th}^2 + \mathcal{E}_{SC}^2 + \mathcal{E}_{RF}^2}$$

measure  $\mathcal{E}_{th}$  vs.  $\sigma_{cathode}$  for low charge ( $\leq 6\text{pC}$ ) and short pulse length ( $\sigma_{laser} \approx 3\text{-}4\text{ps}$ ) →  $E_{kin}$

Expected  $E_{kin}$  for  $\text{Cs}_2\text{Te}$  cathode and 262 nm laser: **0.55 eV**  
(this does not consider: field on cathode, change of cathode properties during operation)

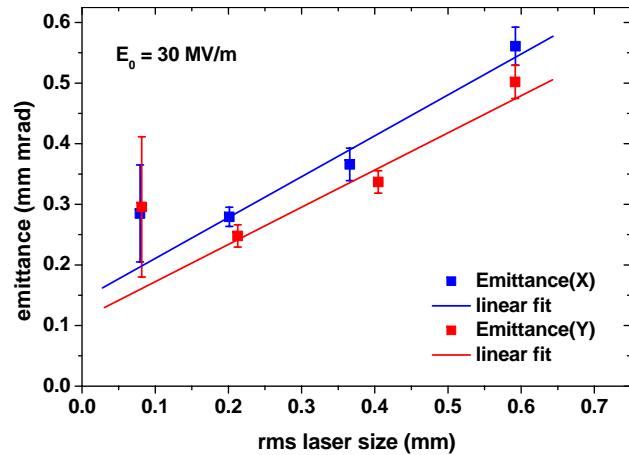

See poster  
**WEPPH012**

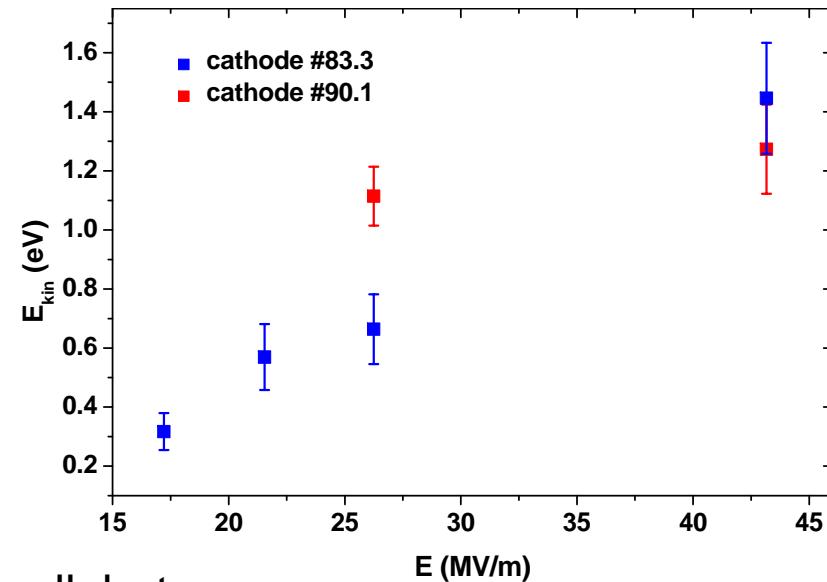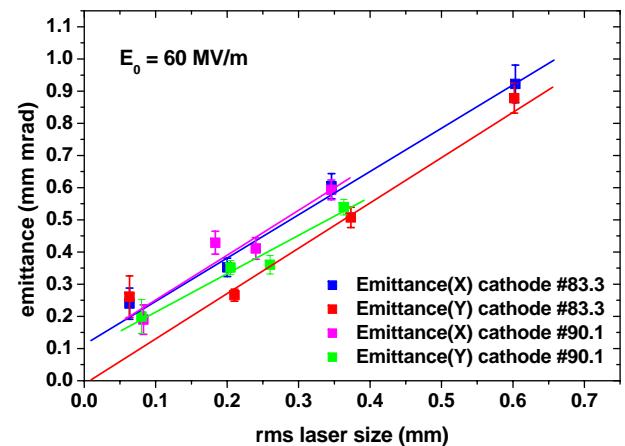


Error bars not small, but

- there is **increasing  $E_{kin}$**  with gradient at cathode !
- different **cathodes** can behave differently !
- **$E_{kin} \approx 1.4 \text{ eV} @ E_0 = 60 \text{ MV/m}$**  → 2 x larger than model  
→ for  $\sigma_{cathode} = 0.35\text{mm}$  →  $\mathcal{E}_{th} = 0.47 \text{ mm mrad (38\%)}$

# Future upgrades at PITZ

- this autumn:
- install improved **laser** system (20 ps FWHM, **rise/fall time  $\leq 2$  ps**)
  - install improved dispersive arm downstream of booster (HEDA1) → **slice emittance measurements**
  - condition **new gun cavity** to 60 MV/m
- 2008:
- install new **CDS booster** and **tomography section**
  - start experimental optimization for **European XFEL baseline parameters**

layout:

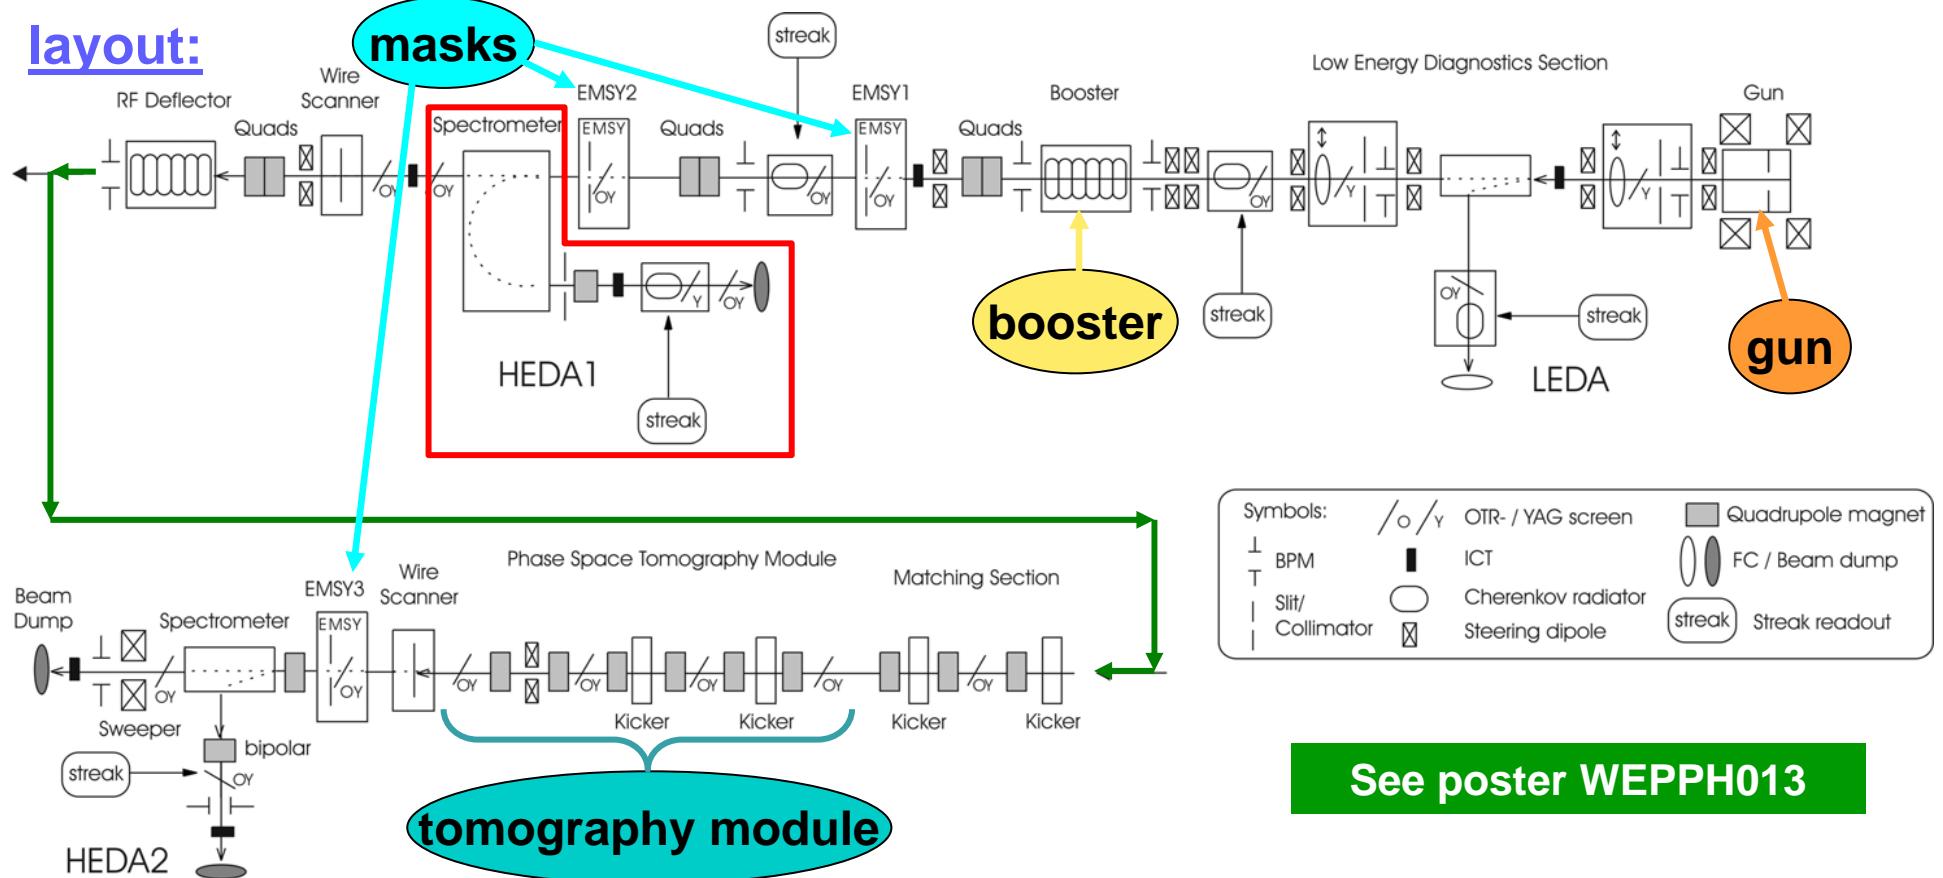

See poster WEPPH013

# Summary

- Gun3.1 characterized at ~**40 MV/m**:
  - operated with up to 3.5MW, **900μs RF**, 10Hz
  - $\epsilon_{x,n} = 1.32 \pm 0.11 \text{ mm mrad}$   
 $\epsilon_{y,n} = 1.43 \pm 0.17 \text{ mm mrad}$
  - **@1nC, (100% RMS)**
- Gun3.2 characterized at ~**60 MV/m**:
  - operated with up to **6.7MW**, 140  $\mu\text{s}$  RF, 10Hz
  - $\epsilon_{x,n} = 1.25 \pm 0.19 \text{ mm mrad}$   
 $\epsilon_{y,n} = 1.27 \pm 0.18 \text{ mm mrad}$
  - (for 95% RMS:  $\epsilon_{x,y,n} \approx 0.8 \text{ mm mrad}$ )
  - thermal emittance:  **$E_{\text{kin}} \approx 1.4 \text{ eV}$**
  - $\mathcal{E}_{\text{th}} = 0.47 \text{ mm mrad (38%)}$
- observed change of **chemical composition of  $\text{Cs}_2\text{Te}$**  cathodes using XPS
- upgrades at PITZ are ongoing → e.g. **new laser in 2007**