

BEAM DYNAMICS CALCULATIONS FOR THE ACCELERATION OF DIFFERENT IONS IN A HEAVY ION LINAC*

H. Deitinghoff, G. Parisi, A. Sauer

Institut für Angewandte Physik, Universität Frankfurt am Main, Germany

M. Pabst

Forschungszentrum Jülich GmbH, Germany

Abstract

Heavy ion linear accelerators are well suited as driver in heavy ion inertial fusion facilities. In present scenarios the acceleration of different ion species or the simultaneous acceleration of different isotopes in the same linac are discussed. Beam dynamics calculations have been performed to check the beam behaviour and the conditions for such a kind of operation in RFQ and DTL.

Introduction

Heavy ion inertial confinement fusion is considered to be an attractive method to create a future powerful source of energy. Several studies are underway to design a driver facility for the generation of the required very intense heavy ion beams for pellet ignition.

One possible way is an rf-linac / storage-ring approach [1,2], where the beam is accelerated in a long main linac to the final energy and then injected into the rings for storage and compression. In all parts severe limitations exist due to space charge effects and emittance growth.

While the first driver proposals dealt with the acceleration of only one ion species, like Bi^+ , recently the use of different ion species or isotopes has been suggested to overcome especially space charge limits.

In the proposal for a charge symmetric driver [3], the simultaneous acceleration of the four main isotopes of Pt, both positively and negatively charged, is foreseen to increase the current limit in the final transport channel by space charge neutralisation. The idea of telescoping of ion bunches [4] propagates the non-Liouvillian time overlap of bunches of ions with different masses but same momentum, which allows the use of the same final focusing channel.

In the latter proposal the ion species changes in the accelerator from macropulse to macropulse, which may allow the switching of the linac parameters from pulse to pulse (already routine operation for the UNILAC of GSI at low currents [5]), while in the case of the space charge neutralised driver the ion species is changing from micropulse to micropulse, i.e. only simultaneous acceleration is possible.

Proposed Driver Layout

In the main linac of the driver facility, heavy ion currents in the range of some hundreds of mA up to some A must be accelerated to meet the power requirements for pellet ignition. Limitations for the accumulation of such intense ion beams at low particle energies are the maximum current that can be extracted from a single ion source and the current transport capa-

bility of LEBT and RFQ. Therefore in all rf linac designs a funnelling scheme [6] is under consideration, in which the beams of 8 or 16 ion sources are bunched and pre-accelerated and then bent together in successive steps, where the rf frequency is doubled in each step.

In the MRTI – ITEP (Moscow) proposal [7] the linac starts with 4 ion sources producing positively charged Pt ions of the isotope masses $A = 192, 194, 196$ and 198 and another 4 sources for negatively charged Pt ions. The beams with identical current and emittances are bunched and accelerated by 4×8 Radio Frequency Quadrupoles (RFQs) and then merged into one main linac, consisting of Wideroe and Alvarez type Drift Tube Linacs (DTLs). It is proposed to design all RFQs for an average mass number 195; in this case, transmission and output emittances for the 4 isotopes accelerated with the same electrode voltage differ only slightly at low beam currents [8]. For a design current near the theoretical current limit, this is still investigated.

As another example, the beam behaviour for the 4 positively charged Pt isotopes has been examined for the first part of an Alvarez DTL, following the MRTI proposal. Again the linac parameters were chosen for the intermediate mass 195 (Table 1); the generation of the linac for particle dynamics calculations has been done with the code packages CLAS, GENLIN and ADAPT.

Table 1
Parameters for Alvarez-1 from MRTI [7].

	input	output
Energy	600 MeV	2500 MeV
Cell length ($\beta\lambda$)	32.42 cm	65.67 cm
Gap length ($\beta\lambda/5$)	6.484 cm	13.134 cm
Frequency	75 MHz	
E-field gradient	35 kV/cm	
Bore radius	1.44 cm	
Synchronous phase	-37 deg	
Total length	683.4 m	

The tank radius and the drift tube outer diameters were optimized with CLAS in order to get the right frequency for both the first and last cell of the linac. Then results were interpolated with GENLIN in order to get the features of all the intermediate cells. The quadrupole lengths were set to 92% of the tube lengths and their gradients were computed with ADAPT for the first 250 cells of the linac (86.9 m), corresponding to an energy range from 600.0 to 798.3 MeV. Each focusing period is formed by 5 lenses of the same sign fol-

* Work performed in Frankfurt in the framework of INTAS 94–1713.

lowed by 5 lenses of the opposite one (i.e. FFFFDDDDDD), in order to limit the maximum gradient, which is now between 34.2 and 28.5 T/m, smoothly decreasing from a quadrupole to the next one, though it was found that using the same value for all the 5 quadrupoles of the same sign within a period gives nearly identical output results.

For the beam input, the following parameters were used:

Table 2

Beam input parameters for Alvarez-1 from MRTI [7].

Horizontal beam size	0.91 cm
Vertical beam size	0.60 cm
Horizontal emittance	1.50 cm mrad
Vertical emittance	1.50 cm mrad
Bunch length	38.6 deg
Momentum spread (dp/p)	0.32%
Current	400 mA

The quoted emittances are full values, not normalized; rms normalized emittances may be obtained dividing by 5 and multiplying by $\beta\gamma$. The Twiss parameters $\beta_{x,y}$ are obtained from the emittances and the beam size values, assuming $\alpha_{x,y} = 0$. Similarly, the longitudinal emittance is the product of bunch length and momentum spread, while β_z is obtained from the emittance and the bunch length values, assuming $\alpha_z = 0$. Calculations were started at low current, that was then raised stepwise to pulse currents of 30–40 mA (total current 400–500 mA), which are presently available from heavy ion sources.

The acceptance of such a linac was computed running MAPRO for the first 250 cells only (due to limited storage and computing time), using the above input values. It was then possible to adjust $\alpha_{x,y}$ in order to match the acceptances and maximize the number of transmitted particles.

Preliminary Results

With the input Twiss parameters above, an input distribution for 2000 particles was generated, using a 4-dim waterbag random distribution in both transverse planes and, independently, a 2-dim waterbag distribution in the longitudinal one (Fig. 1). Then particle dynamics calculations were performed with MAPRO on the linac structure generated by CLAS, GENLIN and ADAPT, for the intermediate atomic mass $A = 195$ and for the 4 isotopes ($A = 192, 194, 196$ and 198) with positive charge only, where matching of the beam and reduction of emittance growth turned out to be rather time consuming.

Preliminary results show that it is possible to accelerate different isotopes in the considered part of the linac: for all masses, the transmission is higher than 97% and the emittance growth is similar, as shown in Table 3 (full emittance) and Table 4 (95% emittance).

The output emittances are given in Figures 2 to 4.

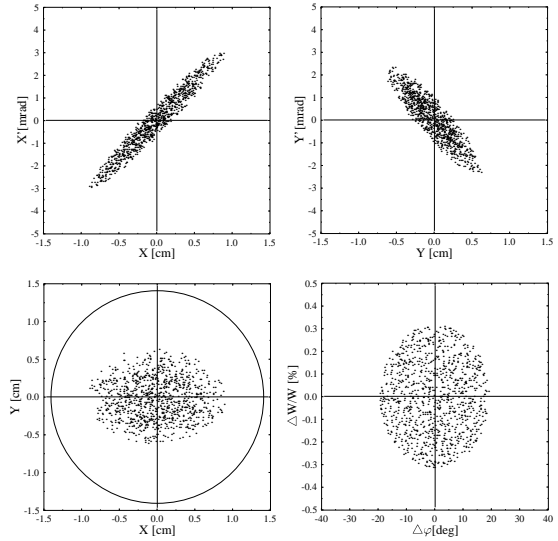


Fig. 1 Input emittances.

Table 3

Output parameters for Alvarez-1 from MAPRO.

A	Transmission	$\Delta\epsilon_x/\epsilon_x$	$\Delta\epsilon_y/\epsilon_y$	$\Delta\epsilon_z/\epsilon_z$
192	98.85%	54.1%	55.8%	-8.3%
194	98.80%	54.5%	59.5%	-9.3%
195	98.60%	59.2%	59.2%	-10.2%
196	98.10%	60.7%	60.5%	-11.1%
198	97.55%	64.5%	63.2%	-13.3%

Table 4

Output parameters for Alvarez-1 from MAPRO (for 95% emittance).

A	$\Delta\epsilon_x/\epsilon_x$	$\Delta\epsilon_y/\epsilon_y$
192	46.8%	48.1%
195	51.7%	50.8%
198	57.3%	55.3%

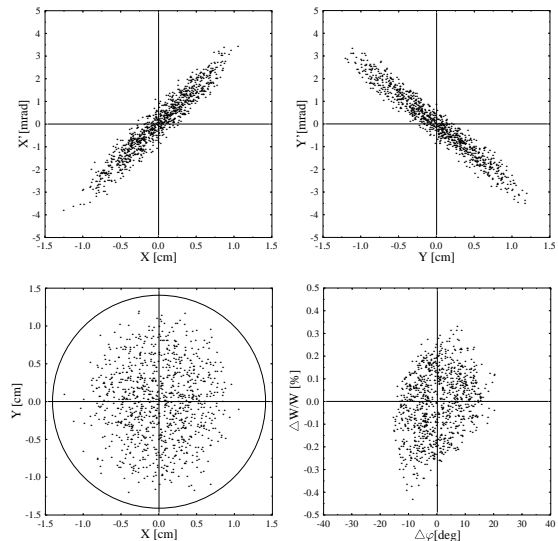


Fig. 2 Output emittances for A = 192.

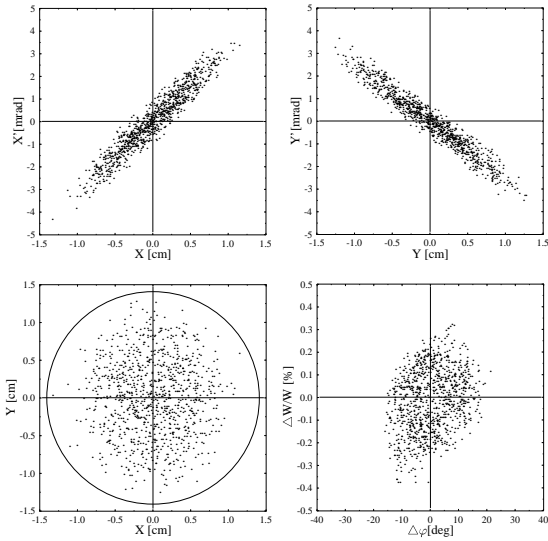


Fig. 3 Output emittances for A = 195.

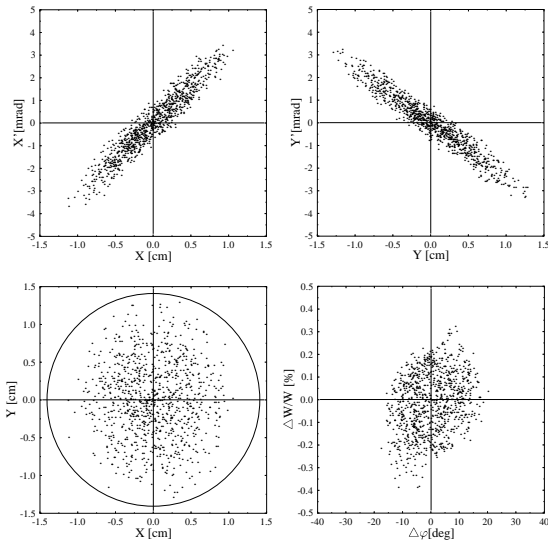


Fig. 4 Output emittances for A = 198.

Conclusions

The acceleration of different ions in the same linac with a fixed parameter setting is proposed in new heavy ion fusion driver design. For a perfect neutralisation of the beam current in the final focus transport line, beams of identical current and bunch dimensions must be delivered from the driver linac. In a first attempt, beam dynamics calculations indicated that variation of beam current and emittances within a few percentages can be achieved for the simultaneous acceleration of different masses. More work will be done for lower emittance growth and higher beam currents.

References

- [1] R. Badger et al., KfK -Rep. 3480 (1984).
- [2] I. Hofmann, Particle Accelerators Vols. 37–38 (1992).
- [3] D.G. Koshkarev, Il Nuovo Cimento Vol. 106 A, No. 11 (1993).
- [4] I. Hofmann, U. Oeftiger, 4th HIDIF-Meeting, GSI Darmstadt (1996).
- [5] N. Angert et al., Linac 90 LA-12004-C, LANL (1991).
- [6] J. Stovall et al., NIM-A278 (1989).
- [7] L.A. Yudin et al., Workshop of Driver Aspects for a Russian Heavy Ion Fusion Facility, ITEP, Moscow (1995).
- [8] H. Deitinghoff et al., Proc. EPAC 96, Barcelona (1996).