

Optimizing the PETRA IV girder by using bio-inspired structures

Simone Andresen

June 28th, 2018



Optimizing the PETRA IV girder

- 1 Introduction
- 2 Support study
- 3 Topology optimization
- 4 Bionic lattice structures
- 5 Conclusion

Simone Andresen



Slide 2

Outline

- 1 Introduction
- 2 Support study
- 3 Topology optimization
- 4 Bionic lattice structures
- 5 Conclusion


Optimizing the PETRA IV girder

- 1 Introduction
- 2 Support study
- 3 Topology optimization
- 4 Bionic lattice structures
- 5 Conclusion

Simone Andresen



Introduction

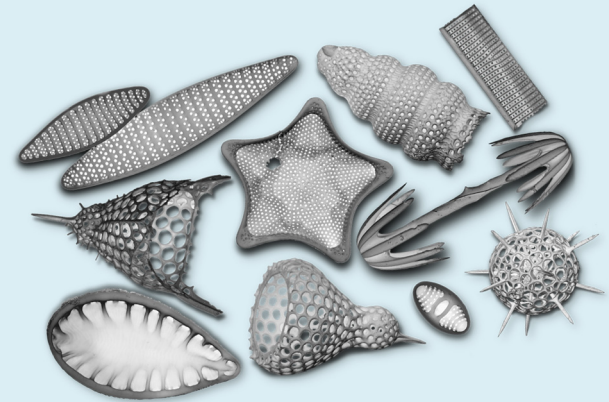



Alfred-Wegener-Institute

- Leading position in polar & marine science
- ~1000 employees
- Intensifies its activities in technology transfer



1 Introduction

2 Support study

3 Topology
optimization

4 Bionic lattice
structures


5 Conclusion

Simone Andresen



What is biomimetics?

- “bios” (life) + “mimesis” (to imitate)
- Solutions in nature are optimized
- Natural selection discards unnecessary things
 - Darwin (1895): “On the Origin of Species”
 - “Survival of the fittest”

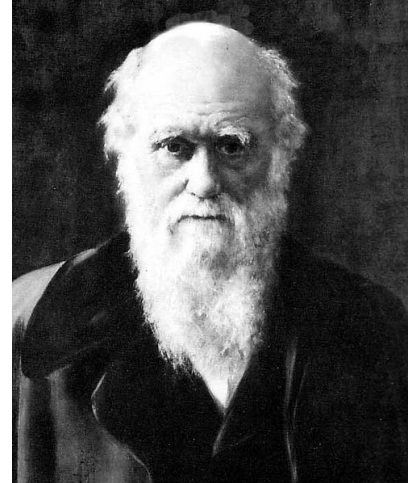

Charles Darwin (1)

- Learning from nature to develop solutions for technical problems

Why marine organisms as biological examples?

- 1 Introduction
- 2 Support study
- 3 Topology optimization
- 4 Bionic lattice structures
- 5 Conclusion

Simone Andresen



1 Introduction

2 Support study

3 Topology
optimization

4 Bionic lattice
structures


5 Conclusion

Simone Andresen



Why marine organisms as biological examples?

- 100,000 different species of diatoms with an enormous variety of shell structures are known
- Characteristics of the shell structures:
 - Lightweight
 - Very high stiffness
 - Expected to have positive impact on vibration characteristics

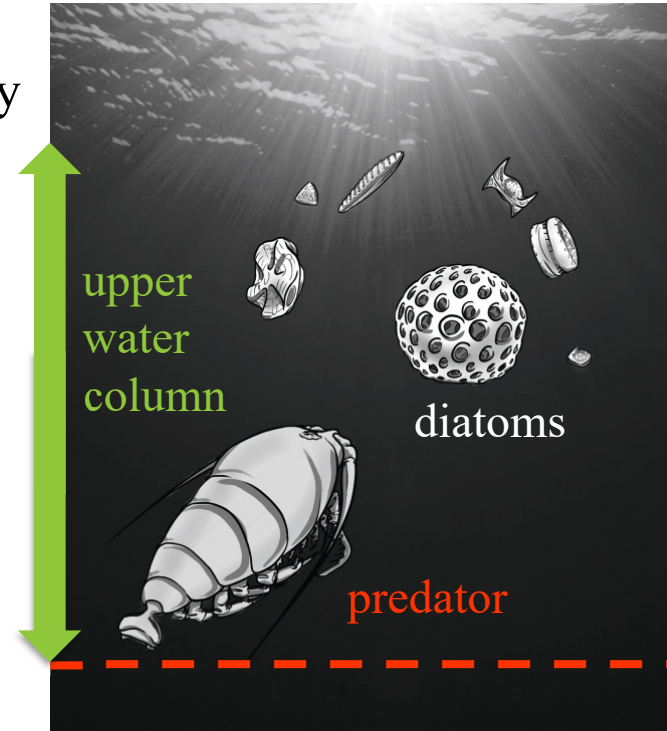

- 1 Introduction
- 2 Support study
- 3 Topology optimization
- 4 Bionic lattice structures
- 5 Conclusion

Simone Andresen




Why marine organisms as biological examples?


“Glass” shells (SiO_2)
resist a pressure of
approximately **700 t m⁻²**.



That is equal to 150
cars on a manhole
cover!

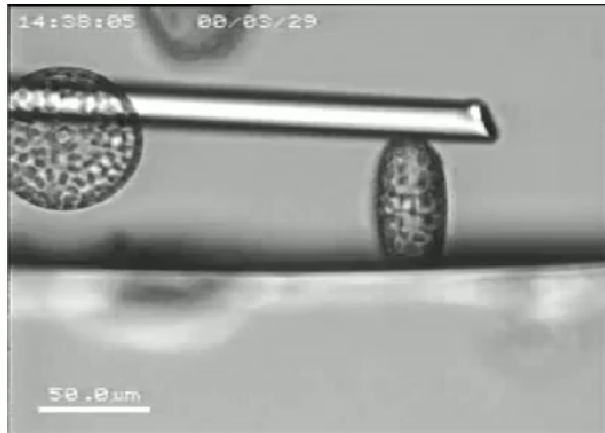

(2)

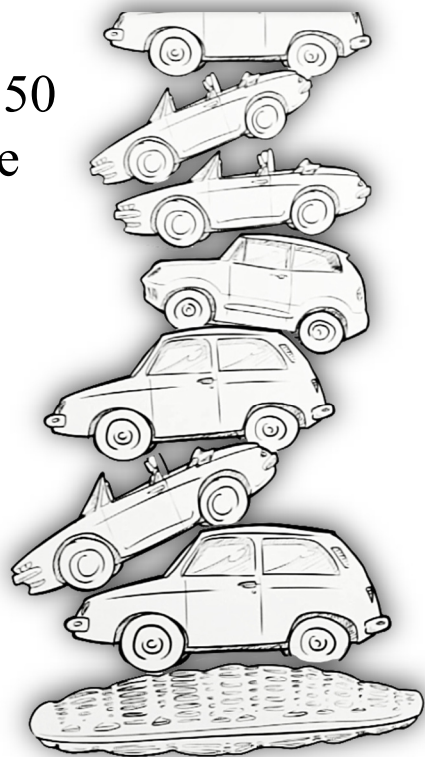

(Hamm et al. 2003, Nature 421, 841-843)


- 1 Introduction
- 2 Support study
- 3 Topology optimization
- 4 Bionic lattice structures
- 5 Conclusion

Simone Andresen



PETRA IV at DESY

PETRA III storage ring will be converted into an ultralow emittance synchrotron radiation source PETRA IV.

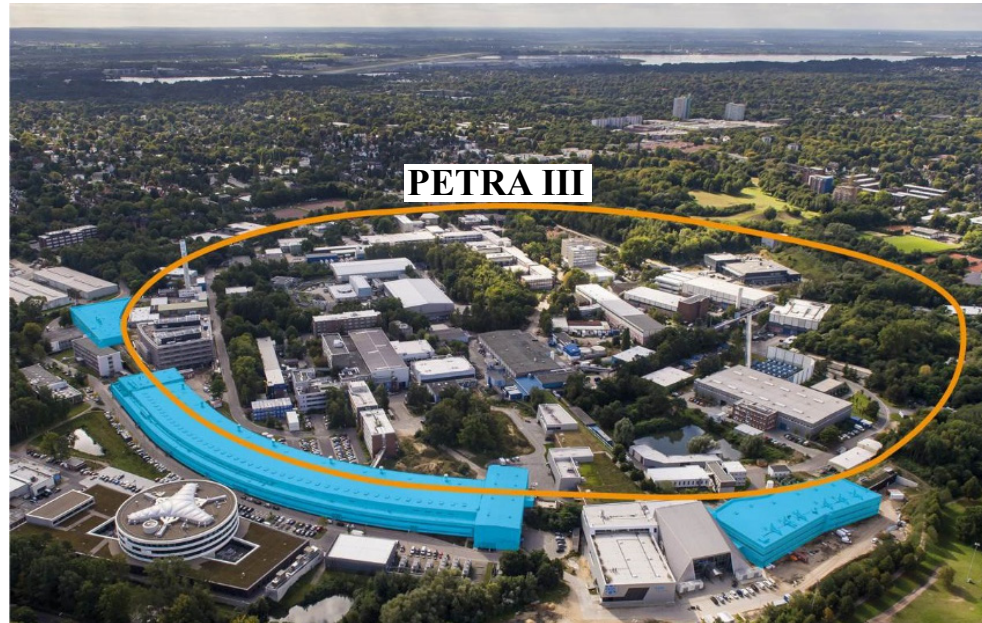

1 Introduction

2 Support study

3 Topology optimization

4 Bionic lattice structures

5 Conclusion

Simone Andresen



Project goals

- Systematic development of new girder designs considering several approaches using bio-inspired structures
- Goal: optimizing the PETRA IV girder
 - 1st natural frequency of more than 52 Hz
 - Maximal deflection (linear static): 0.5 mm
 - Maximal girder mass: 2,500 kg

Optimizing the PETRA IV girder

- 1 Introduction
- 2 **Support study**
- 3 Topology optimization
- 4 Bionic lattice structures
- 5 Conclusion

Simone Andresen



Slide 11

Support study



(3)

Optimizing the PETRA IV girder

- 1 Introduction
- 2 Support study
- 3 Topology optimization
- 4 Bionic lattice structures
- 5 Conclusion


Simone Andresen



Slide 12

Model assembly

- Starting with PETRA III girder
- Girder abstracted as a hollow cuboid (material: steel)
- Shell elements
- Three heavy magnets considered as point masses
- Software: Rhinoceros (Grasshopper) combined with the Solver OptiStruct (Altair)
- Support points were varied in a parameter study

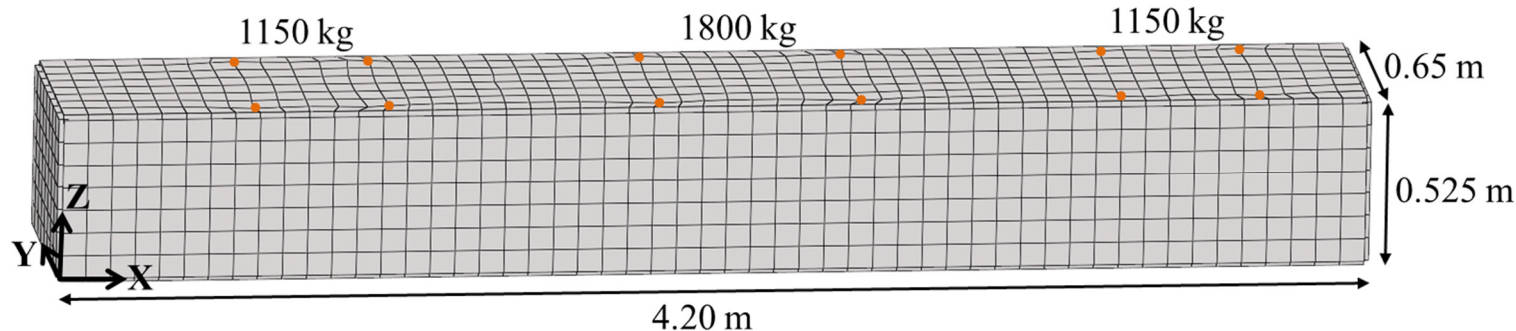

- 1 Introduction
- 2 **Support study**
- 3 Topology optimization
- 4 Bionic lattice structures
- 5 Conclusion

Simone Andresen



Parameter study

Parameter that were varied:

Number of support points

3, 4, 5 and 6

Location of support points

Lower girder surface
(Bessel points)

Upper girder edges
(close to the magnets)

Constraints at each support point: $X=Y=Z=R_x=R_y=R_z=0$


- 1 Introduction
- 2 Support study
- 3 Topology optimization
- 4 Bionic lattice structures
- 5 Conclusion

Simone Andresen



Considering the girder pedestals

Evaluating how the pedestals influence the natural frequency

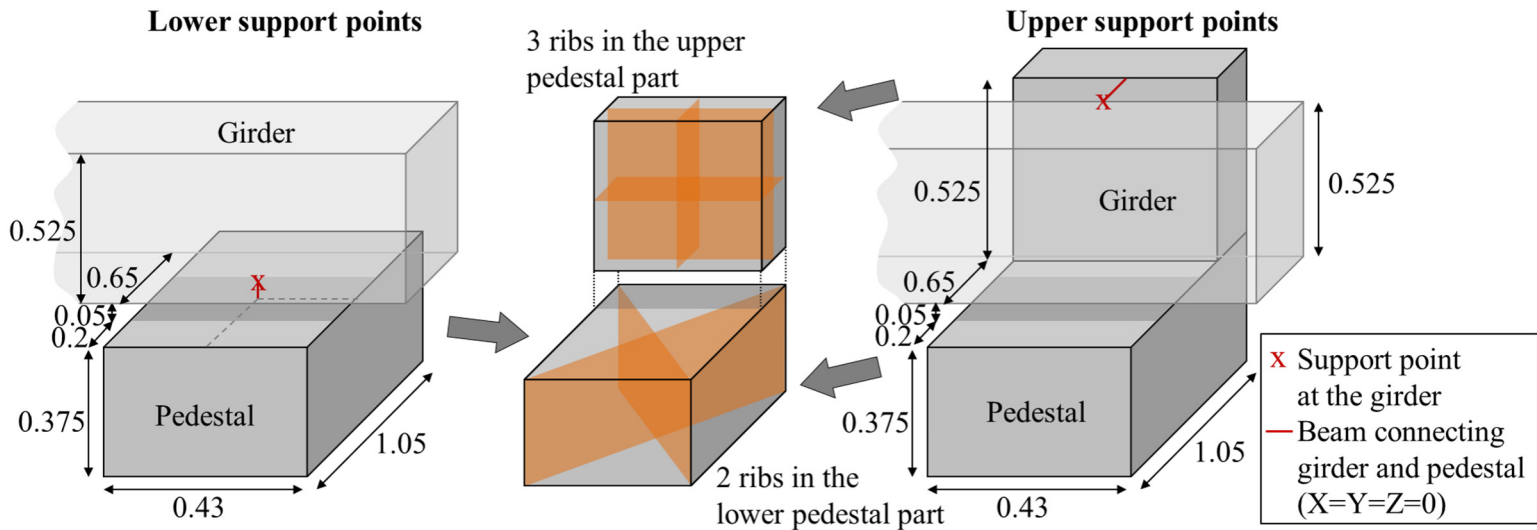


- 1 Introduction
- 2 Support study
- 3 Topology optimization
- 4 Bionic lattice structures
- 5 Conclusion

Simone Andresen




Results

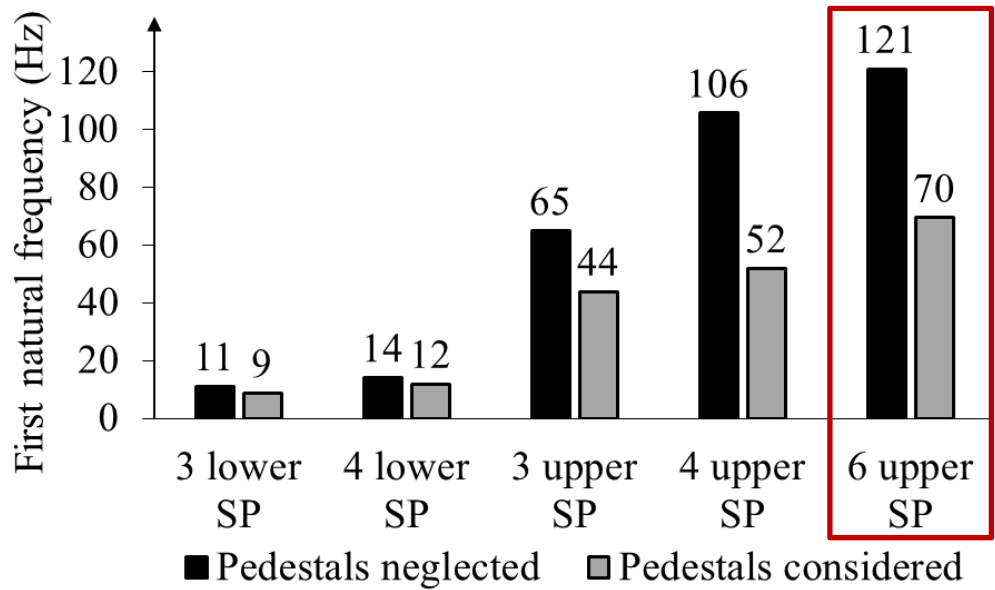

- 6 support points close to the magnets (load) will be considered (keeping in mind that the support is modeled as quite stiff in the simulations)

Results

- Best support point configuration:
6 support points at the upper girder edges

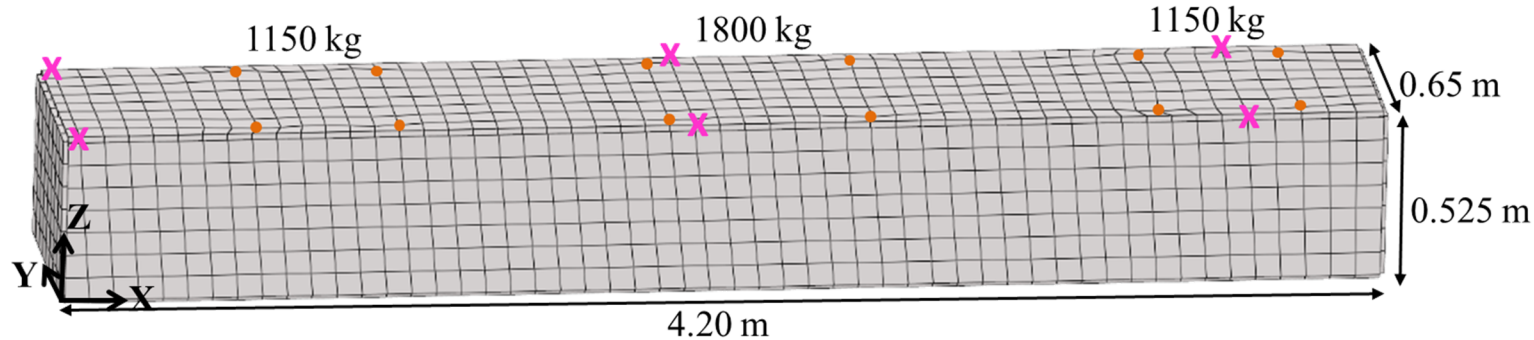

✕ Support point

● Point mass (magnet)

Optimizing the PETRA IV girder


- 1 Introduction
- 2 Support study
- 3 Topology optimization**
- 4 Bionic lattice structures
- 5 Conclusion

Simone Andresen



Slide 17

Topology optimization

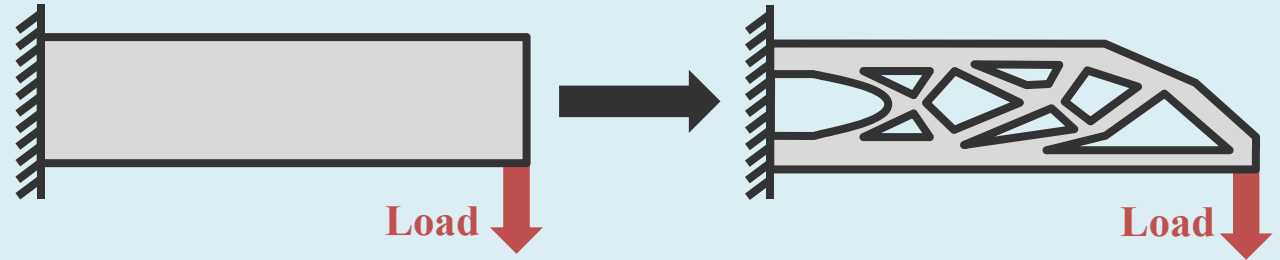

Optimizing the PETRA IV girder


- 1 Introduction
- 2 Support study
- 3 Topology optimization
- 4 Bionic lattice structures
- 5 Conclusion

Simone Andresen




Slide 18

Model assembly

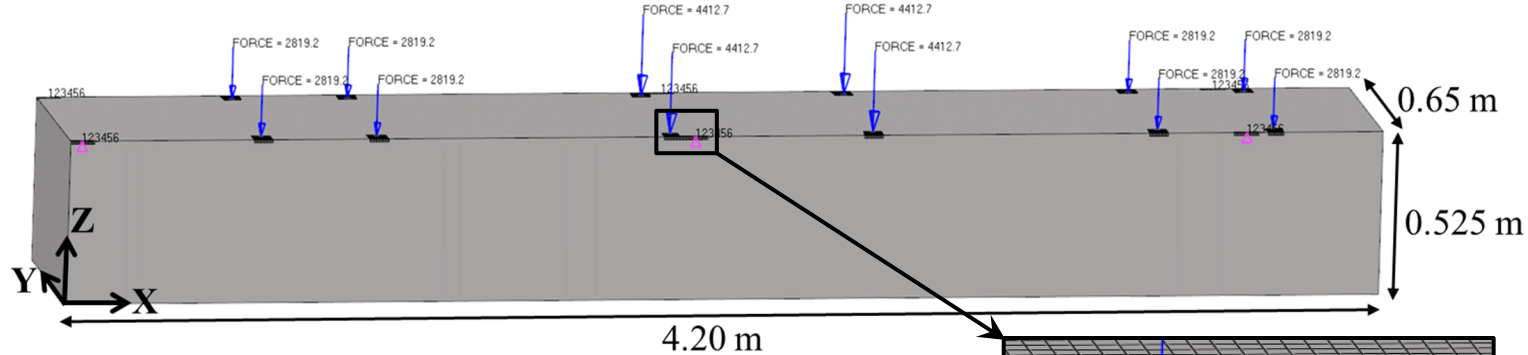

- Bright grey: design space, dark grey: non-design space
- Software: HyperWorks (Altair)
- Goal: Maximize stiffness
- Constraints: 1^{st} natural frequency > 100 Hz
Volume $< 10\%$ of design space volume

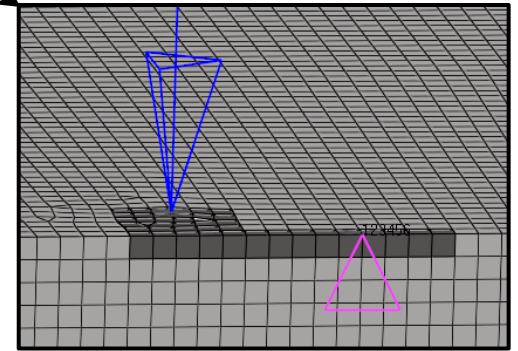


Fine 3D mesh

Optimizing the PETRA IV girder

- 1 Introduction
- 2 Support study
- 3 **Topology optimization**
- 4 Bionic lattice structures
- 5 Conclusion


Results

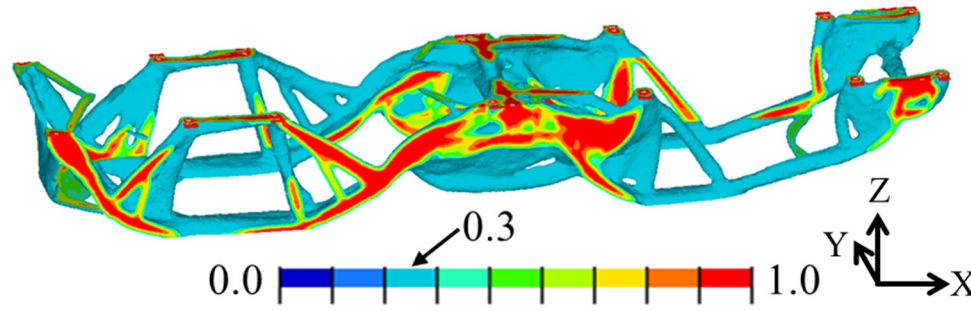

Topology optimization result

Artificial element density (densities > 0.3 are displayed)

Properties of the resulting structure:
1st natural frequency: 91 Hz - mass: 863 kg - maximal static deflection: 0.03 mm

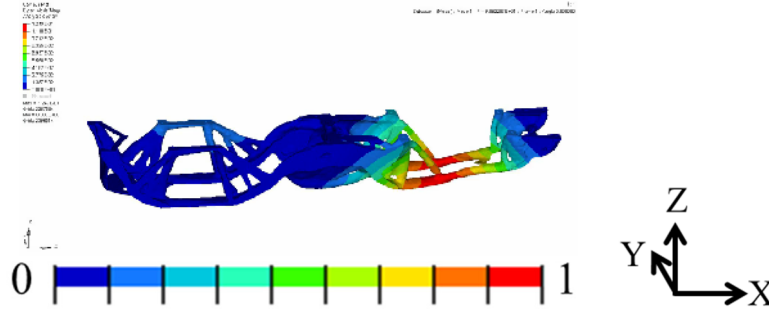

Modal analysis result

Normalized vibration amplitude of the 1st eigenmode

Simone Andresen




- 1 Introduction
- 2 Support study
- 3 Topology optimization**
- 4 Bionic lattice structures
- 5 Conclusion

Simone Andresen



Further optimization

Smoothing the topology optimization result, deriving curves from it, projecting them on the outer girder walls as ribs and varying the rib thicknesses in parameter studies.

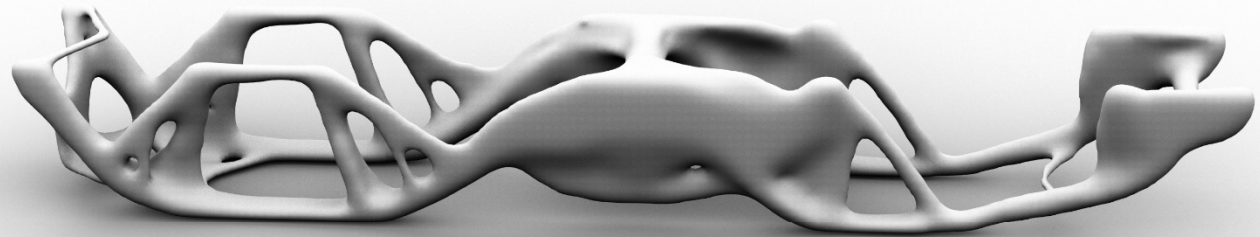


- 1 Introduction
- 2 Support study
- 3 Topology optimization**
- 4 Bionic lattice structures
- 5 Conclusion

Simone Andresen



Further optimization

Smoothing the topology optimization result, deriving curves from it, projecting them on the outer girder walls as ribs and varying the rib thicknesses in parameter studies.

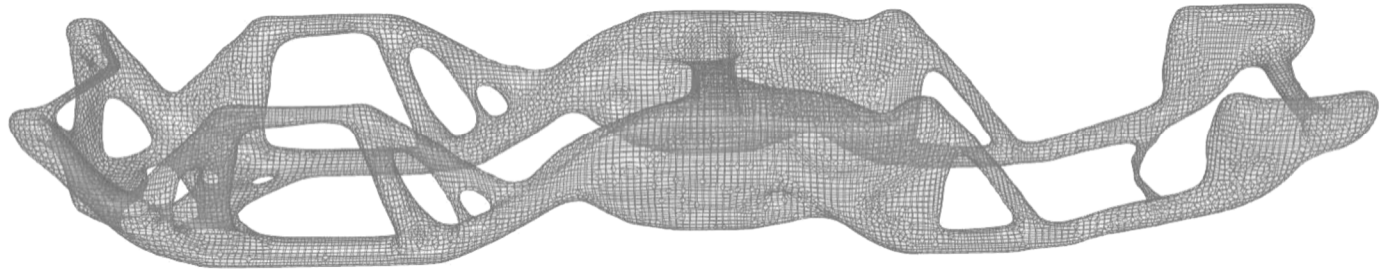


- 1 Introduction
- 2 Support study
- 3 Topology optimization**
- 4 Bionic lattice structures
- 5 Conclusion

Simone Andresen



Further optimization

Smoothing the topology optimization result, deriving curves from it, projecting them on the outer girder walls as ribs and varying the rib thicknesses in parameter studies.

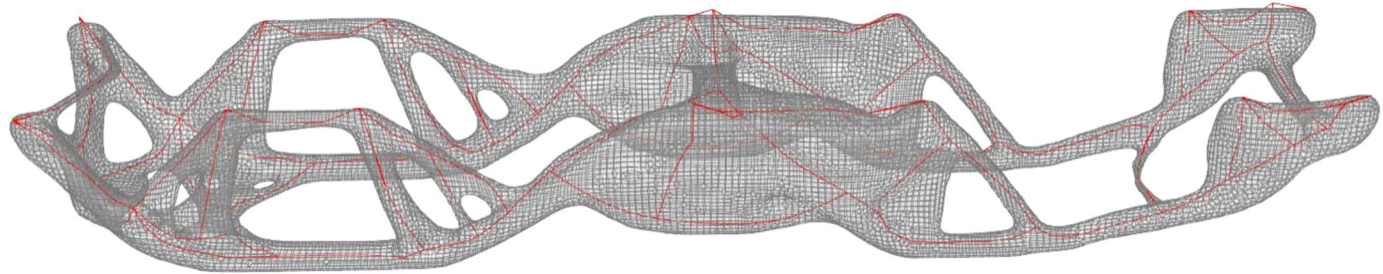


- 1 Introduction
- 2 Support study
- 3 Topology optimization**
- 4 Bionic lattice structures
- 5 Conclusion

Simone Andresen



Further optimization

Smoothing the topology optimization result, deriving curves from it, projecting them on the outer girder walls as ribs and varying the rib thicknesses in parameter studies.

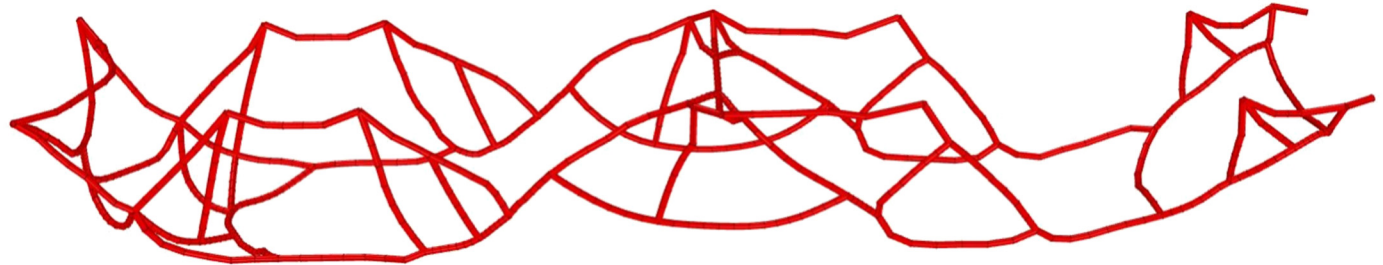


- 1 Introduction
- 2 Support study
- 3 Topology optimization**
- 4 Bionic lattice structures
- 5 Conclusion

Simone Andresen



Further optimization

Smoothing the topology optimization result, deriving curves from it, projecting them on the outer girder walls as ribs and varying the rib thicknesses in parameter studies.

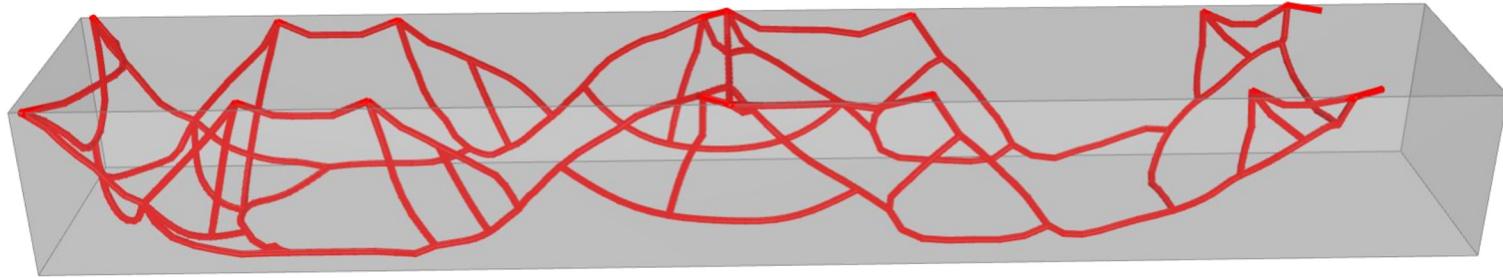


- 1 Introduction
- 2 Support study
- 3 Topology optimization**
- 4 Bionic lattice structures
- 5 Conclusion

Simone Andresen



Further optimization

Smoothing the topology optimization result, deriving curves from it, projecting them on the outer girder walls as ribs and varying the rib thicknesses in parameter studies.

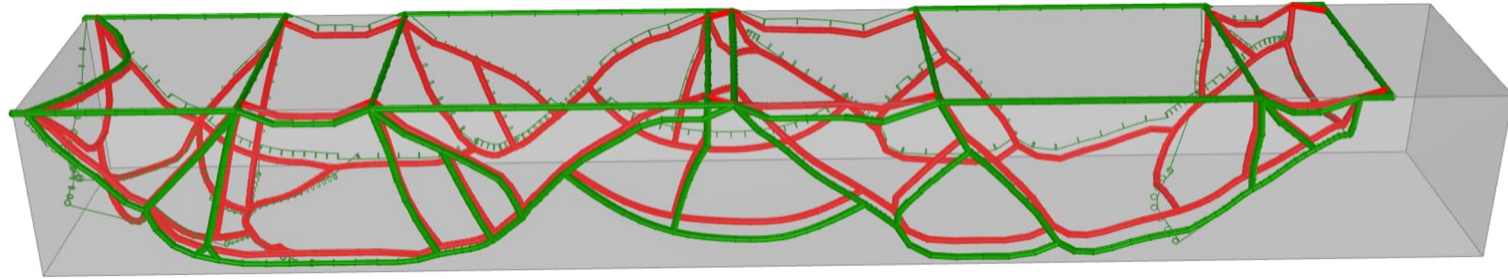


- 1 Introduction
- 2 Support study
- 3 Topology optimization**
- 4 Bionic lattice structures
- 5 Conclusion

Simone Andresen



Further optimization

Smoothing the topology optimization result, deriving curves from it, projecting them on the outer girder walls as ribs and varying the rib thicknesses in parameter studies.

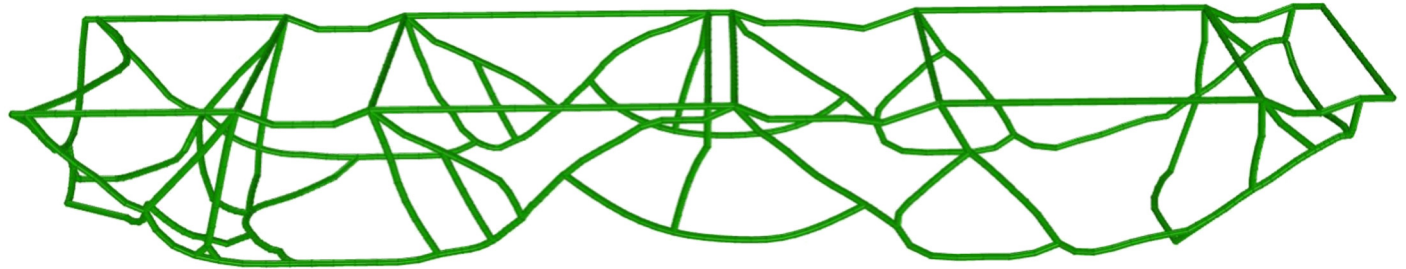


- 1 Introduction
- 2 Support study
- 3 **Topology optimization**
- 4 Bionic lattice structures
- 5 Conclusion

Simone Andresen



Further optimization: Results


Smoothing the topology optimization result, deriving curves from it, projecting them on the outer girder walls as ribs and varying the rib thicknesses in parameter studies.

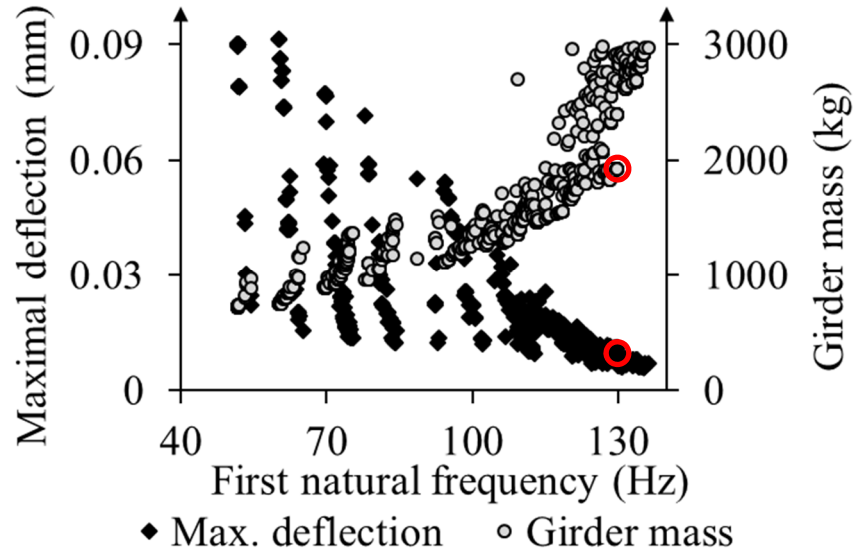

- 1 Introduction
- 2 Support study
- 3 Topology optimization
- 4 Bionic lattice structures
- 5 Conclusion

Further optimization: Results

Smoothing the topology optimization result, deriving curves from it, projecting them on the outer girder walls as ribs and varying the rib thicknesses in parameter studies.

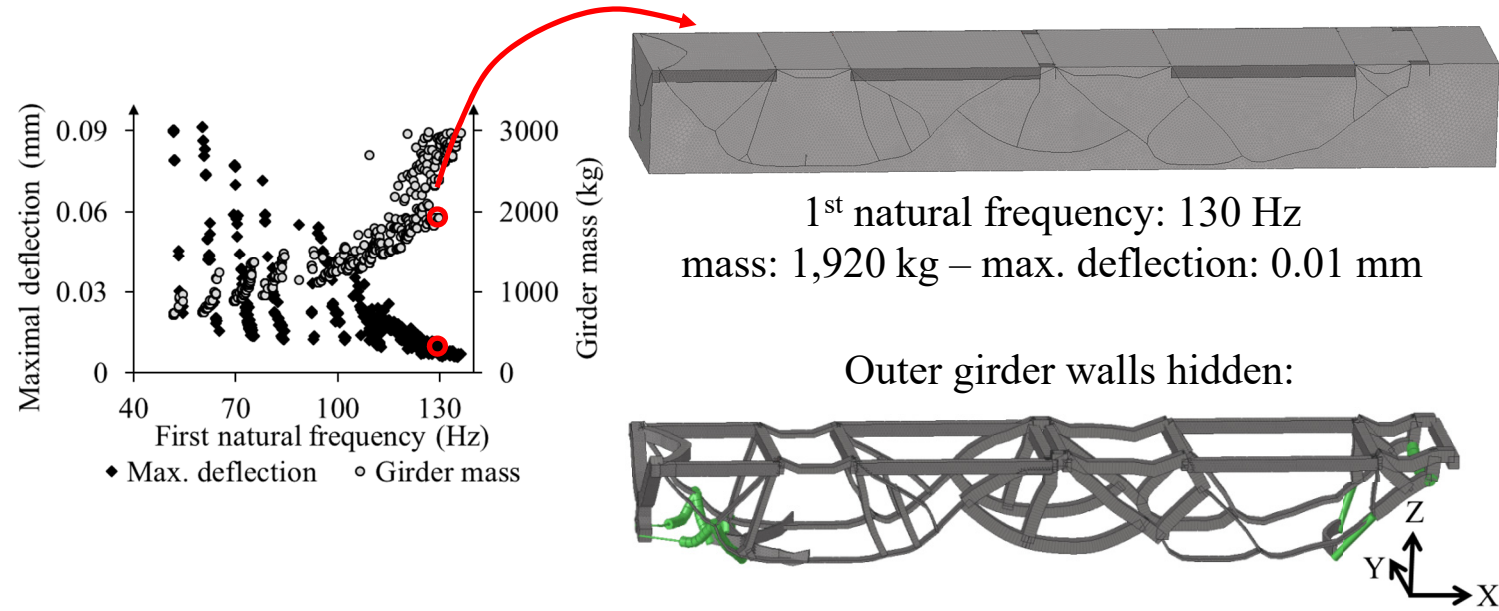


Optimizing the PETRA IV girder

- 1 Introduction
- 2 Support study
- 3 Topology optimization
- 4 Bionic lattice structures**
- 5 Conclusion

Simone Andresen




Bionic lattice structures

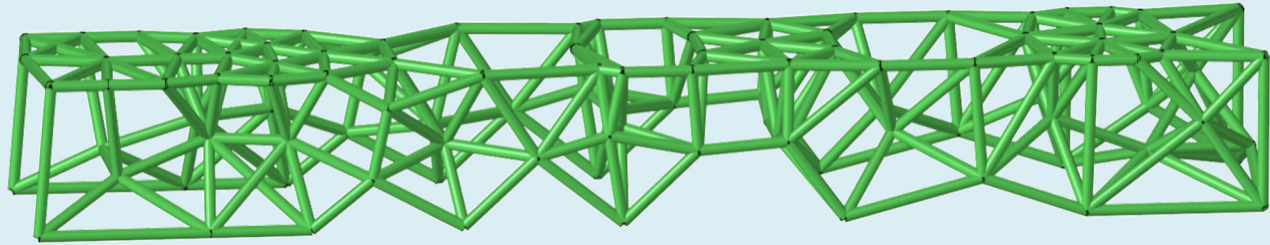

Model assembly

- Construction of lattices inside the hollow girder

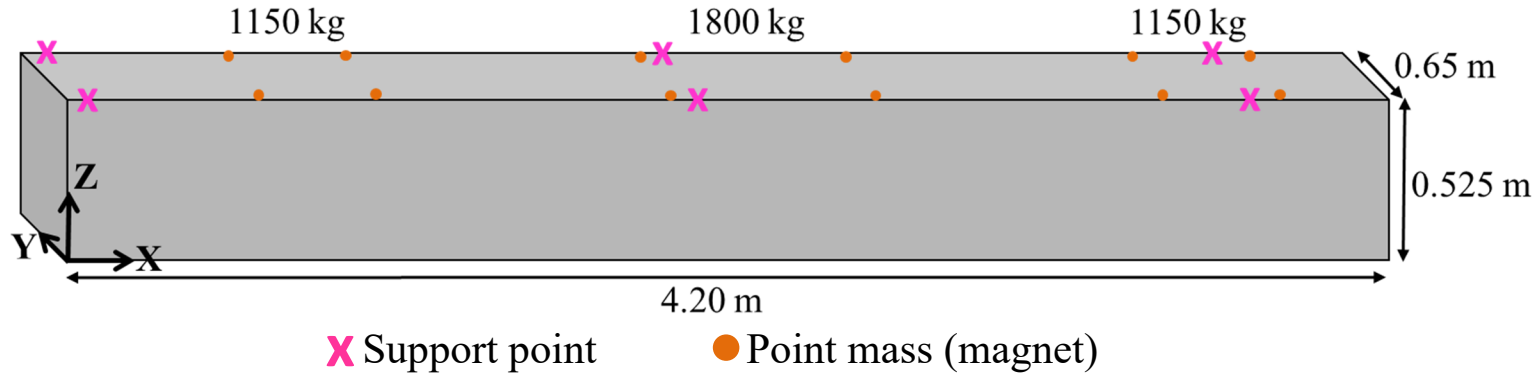

- Boundary conditions, material properties and loads were analogous to the previous studies.
- Lattice parameters were varied to develop different structures and find the best parameter combination.


- 1 Introduction
- 2 Support study
- 3 Topology optimization
- 4 Bionic lattice structures**
- 5 Conclusion

Simone Andresen




Generating bionic lattice structures

Lattice structures were built by connecting neighboring points.

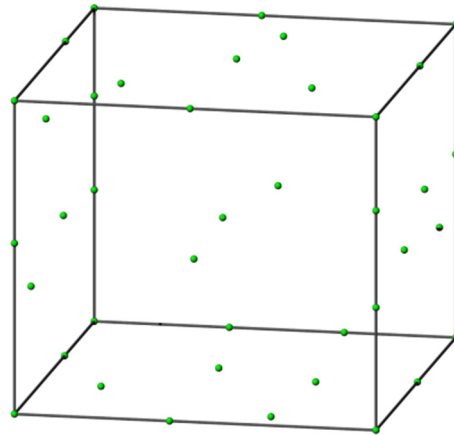

Point distribution
inside a volume

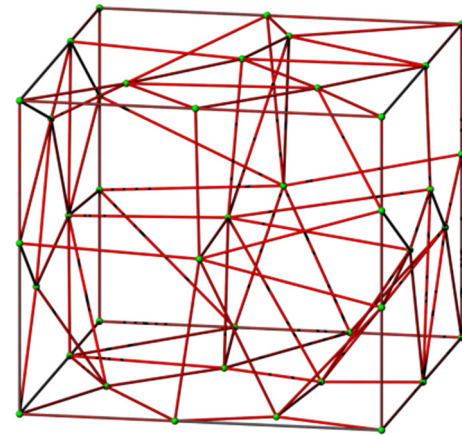

Connecting each point
with several neighboring points


- 1 Introduction
- 2 Support study
- 3 Topology optimization
- 4 Bionic lattice structures**
- 5 Conclusion

Simone Andresen



Generating bionic lattice structures

Lattice structures were influenced by attractors.

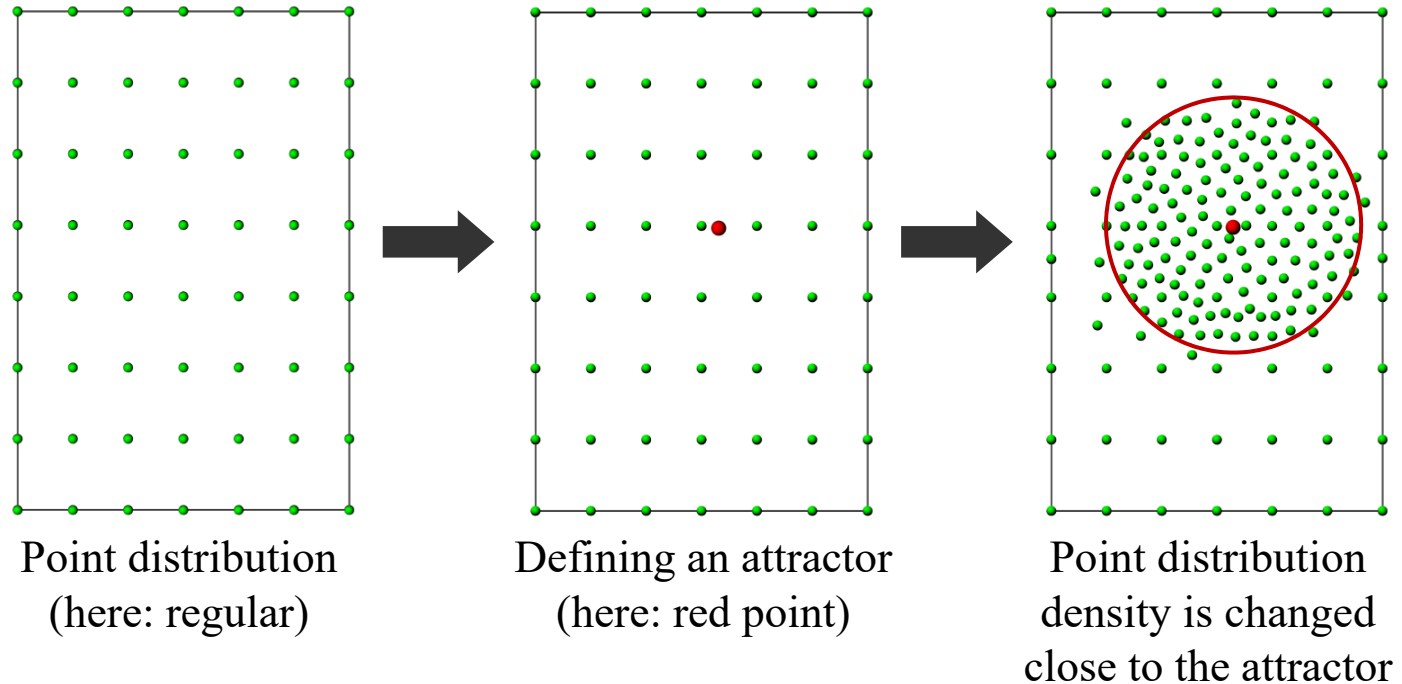

Optimizing the PETRA IV girder

- 1 Introduction
- 2 Support study
- 3 Topology optimization
- 4 Bionic lattice structures
- 5 Conclusion

Simone Andresen



Slide 33



Results

High potential of bionic lattice structures:

Natural frequency can be increased by leaving the stiffness and/or mass constant.

One mass oscillator (1 DOF):



$$f = \frac{1}{2\pi} \sqrt{\frac{c}{m}}$$

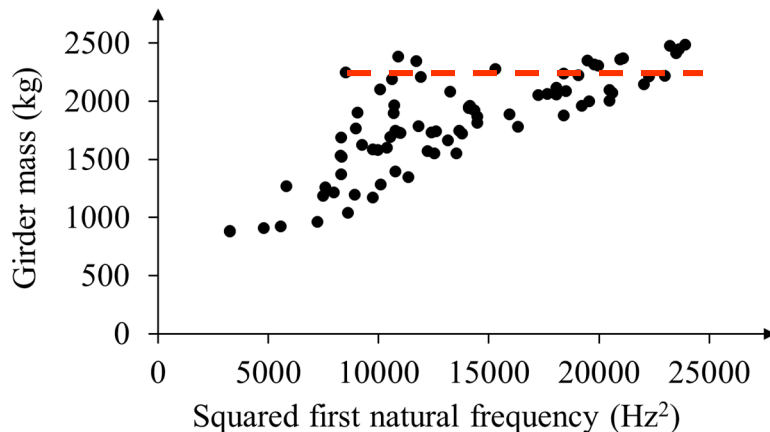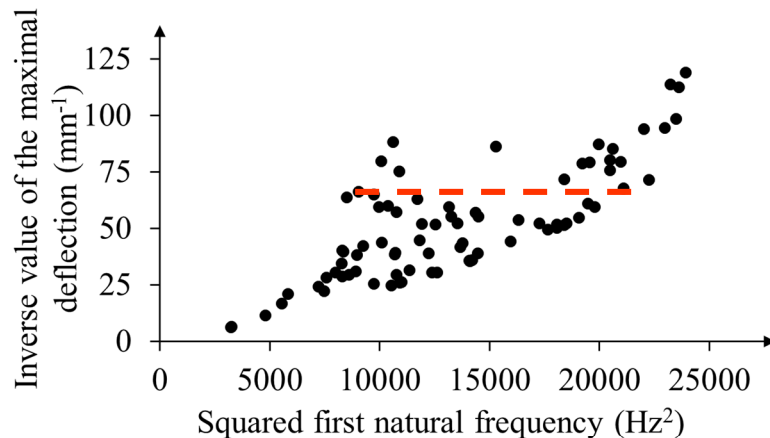

Results

Best girder structure (pedestals are included)

- 1st natural frequency: 70 Hz
- Girder mass: 2489 kg
- Maximal deflection (linear static): 0.02 mm

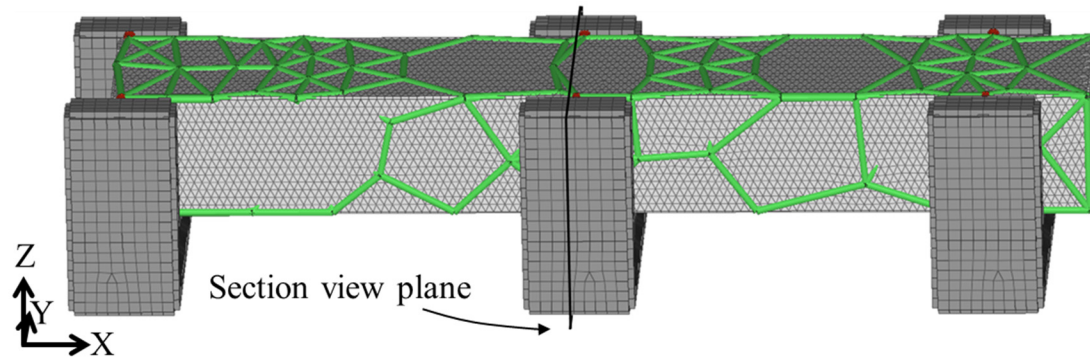

Optimizing the PETRA IV girder

- 1 Introduction
- 2 Support study
- 3 Topology optimization
- 4 Bionic lattice structures
- 5 Conclusion**

Simone Andresen



Slide 35

Conclusion



(4)

- 1 Introduction
- 2 Support study
- 3 Topology optimization
- 4 Bionic lattice structures
- 5 **Conclusion**

Simone Andresen



Conclusion

- Support point number and location have a huge impact on the girder properties.
- Pedestals should have a high stiffness.
- Topology optimizations in combination with further optimizations to find optimal rib thicknesses leads to promising girder designs.
- The use of bionic lattice structures also allows the development of girder designs with high natural frequencies and stiffness.

Images

- 1 Introduction
- 2 Support study
- 3 Topology optimization
- 4 Bionic lattice structures
- 5 Conclusion

Simone Andresen



- (1) <http://www.charles-darwin-jahr.at/index.php?m=viewarticle&ar=76> (06/22/2018)
- (2) https://www.google.com/url?sa=i&rct=j&q=&esrc=s&source=images&cd=&ved=2ahUKEwjhrcT7u-TbAhUJGuwKHY5GCegQjxx6BAgBEAI&url=https%3A%2F%2Fwww.bild.de%2Fratgeber%2Fevergreen%2Fverkehrsordnungswidrigkeit%2Falltagsfrage_gullideckel-48699678.bild.html&psig=AOvVaw0CmhRN6iVYW9WBXEEzcuN3&ust=1529660609455012 (06/21/2018)
- (3) <https://www.dreamstime.com/stock-illustration-cartoon-boy-asking-question-image52969173> (06/21/2018)
- (4) <http://posandnegaimpactsofsofnetsites.blogspot.com/2014/12/conclusion.html> (06/19/2018)

Thank you very much for your attention

Simone Andresen

Alfred Wegener Institut, Helmholtz-Zentrum für Polar- und Meeresforschung
Research section Bionic Lightweight Design

Bussestr. 27, 27570 Bremerhaven, Germany

Tel: +49 471 4831 2827

E-Mail: simone.andresen@awi.de



ALFRED-WEGENER-INSTITUT
HELMHOLTZ-ZENTRUM FÜR POLAR-
UND MEERESFORSCHUNG



HELMHOLTZ
RESEARCH FOR GRAND CHALLENGES