



A Linear Accelerator for Proton Therapy.

V. Paramonov, A. Durkin, A. Kolomiets


*Institute for Nuclear Research of the RAS,
Moscow, Russia*

RuPAC-2021, Alushta, Crimea, Russia

26 September – 2 October 2021

Accelerators for Proton Therapy

LIGHT is the mostly advanced linac project for today

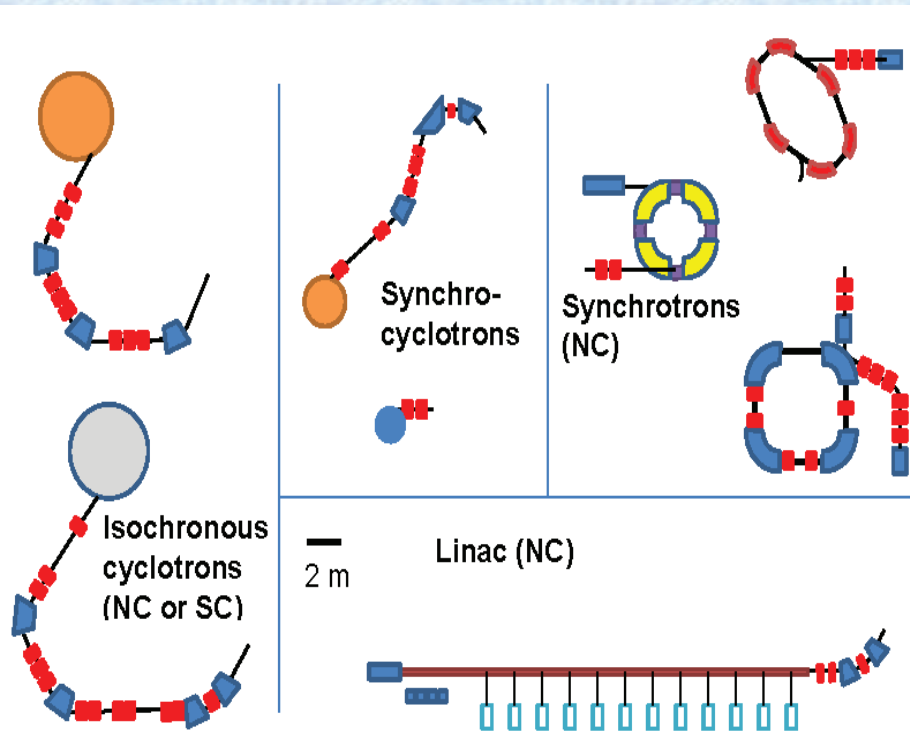

LIGHT (Linac for Image Guided Hadron Therapy)

25 m

750 MHz Radio Frequency Quadrupole (RFQ)

3 GHz Side Coupled Drift Tube Linac (SCDTL)

3 GHz Coupled Cavity Linac (CCL)

- Active energy modulation → no absorber and degrader
- Pulsed beam at 200 Hz → intensity and energy modulation in 5 ms
- Small beam emittance → small magnets aperture
- Almost no losses! → reduced shielding

→ beam suited for 3D spot scanning

A. Degiovanni,
HG2018 Workshop,
Shanghai, China

Linac benefits

A. Degiovanni, NAPAC 2016.

Cornerstones for the design.


- 1. - wide functionality for both practical and research proton medicine;*
- 2. – operational reliability, conservative systems parameters proven in long-term operation;*
- 3. – the concept of a high-frequency multi-cavity low-current pulsed linac;*
- 4. – pencil-like beam;*
- 5. – mutual optimization, balance and feasibility of solutions for beam dynamics, accelerating and focusing elements;*
- 6. - cost reduction, size reduction;*
- 7. - the use of technologies and elements confidently mastered by the high-tech industry (or with guaranteed parameters upgrade);*
- 8. - one button start with a minimal wake-up time,*
- 9. – to be installed in regional PT centers.*

Our development assistants.

- 1. - long-term experience in the operation and modernization of operating multi cavity linear proton accelerators;*
- 2. - accumulated experience in understanding and managing interrelated processes in the accelerator;*
- 3. - long-term experience in the development of both equipment for linear accelerators and projects for both national and foreign laboratories.*

Linac scheme.

A classical proton linac scheme with some non classical proposals and operating modes.

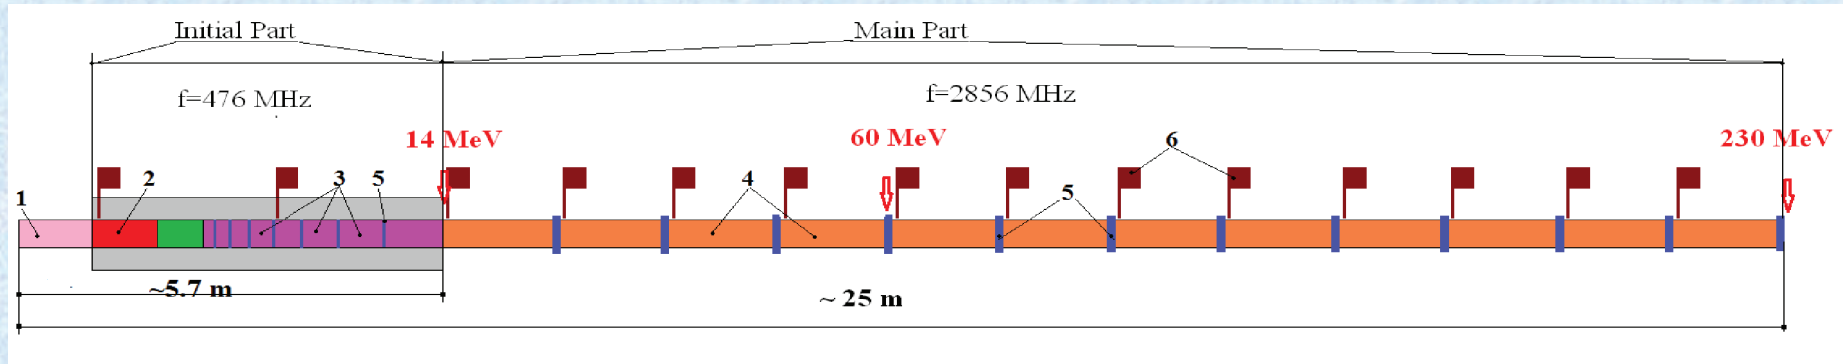

1 - proton source, 2 – RFQ, 3 – DTL, 4 – TW structure, 5 – focusing elements, 6 – RF sources.

Functional purpose and particular features

Proton source - 60 kV pulsed proton beam with peak current up to 3 mA and emittance $0.1 \pi \text{ mm mrad}$. Formation is not possible. Beam collimation is possible.

RFQ - pre-acceleration, bunches formation with small longitudinal emittance.


Initial Part - acceleration, collimation (below 7 MeV) and conservation of longitudinal emittance.

Main Part - main acceleration, energy regulation, traveling wave structure.

RFQ

Main RFQ parameters.

<i>Parameter</i>	<i>Value</i>
<i>Frequency, MHz</i>	476
<i>Voltage, kV</i>	75
<i>Input energy, MeV</i>	0.06
<i>Output energy, MeV</i>	1.56
<i>E_{max}/E_k</i>	1.57
<i>Length</i>	1.48λ

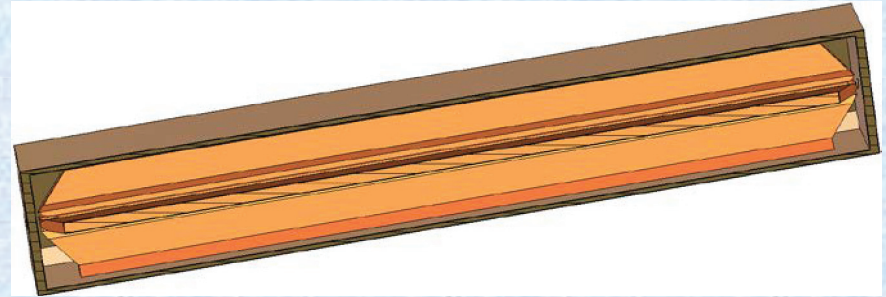


Particles distribution at RFQ output.

Low longitudinal emittance of the output bunches.


Accelerating Structure in the Initial Part

Low Q high Ze accelerating structure -, 11 IH DTL cavities





DTL 1,



DTL 6,

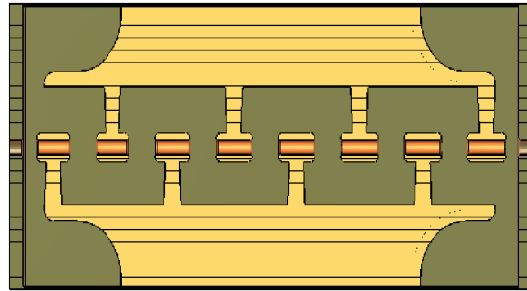

DTL 11.

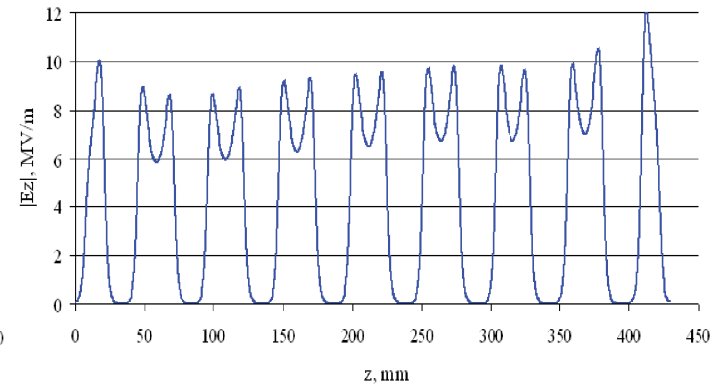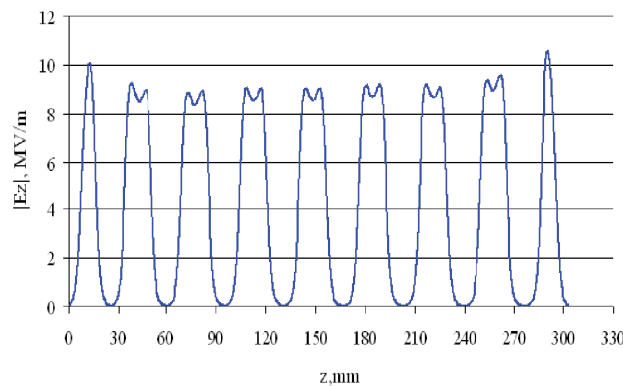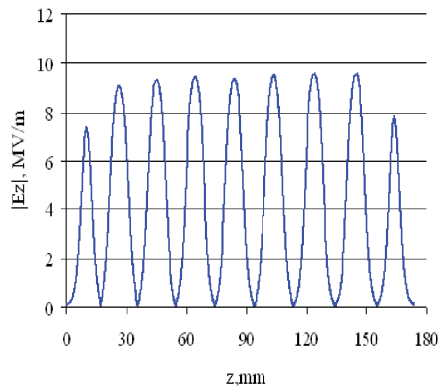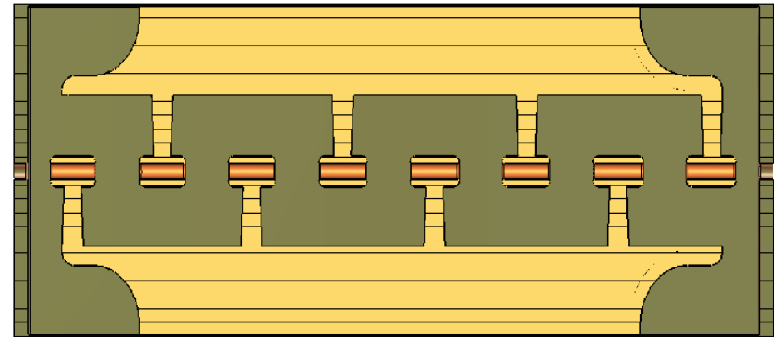

E_{smax}/E_k 0.96 -1.5

RF sources for the Initial Part

Pulsed RF sources, frequency 476 MHz, RF pulse length 80 μ s, duty cycle ~250, full reflected power.

Cavity	Pimp
RFQ	124
DTL 1	15
DTL 2	18
DTL 3	22
DTL 4	25
DTL 5	33
DTL 6	35
DTL 7	38
DTL 8	43
DTL 9	48
DTL 10	55
DTL 11	62

Твердотельные ВЧ усилители НИИТФА





RFA202-250P
202 МГц, 250кВт
Лаб. Резерфорда)



Прототип 352 МГц,
100кВт

Продукт:

- Замена электронных ламп (клистронов, тетродов, и пр.)
- Мощность: до 2МВт Частота: 1 ... 1500 МГц

Преимущества:


- Надёжность: >80 тыс.ч. благодаря «горячей замене» модулей
- Компактность: размеры в 1.5 раза меньше конкурентов
- Масштабируемость: единая архитектура для 10 ... 2000 кВт

Перспективы

- Усилители для медицины: ПЭТ циклотроны, протонно-ионная терапия, МРТ
- Усилители для промышленного сектора и ТВ: CO₂ лазеры, генераторы плазмы, ТВ трансмиттеры



RFA23-2CW 23МГц, 2кВт
(Лаб. TRIUMF)




Вариант компактного исполнения
1300 МГц 32 кВт CW

G.B. Sharkov, LaPLAZ, Moscow, 2021


*The total pulsed RF power ~520 kW,
the total average RF power ~ 2 kW.*

As the result at Initial Part output we expect:

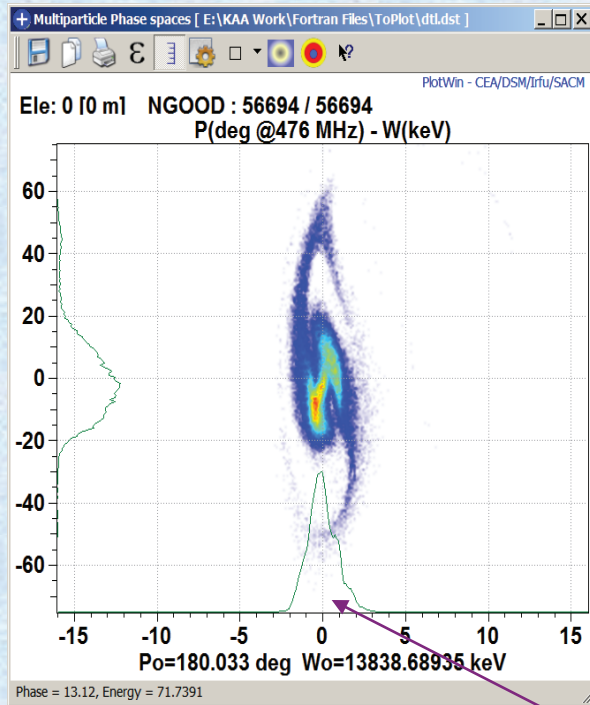


$$\epsilon_z (\text{rms}) = 14.3709 \pi \cdot \text{deg} \cdot \text{keV}$$

$$\epsilon_z (98.41\%) = 100.5962 \pi \cdot \text{deg} \cdot \text{keV}$$

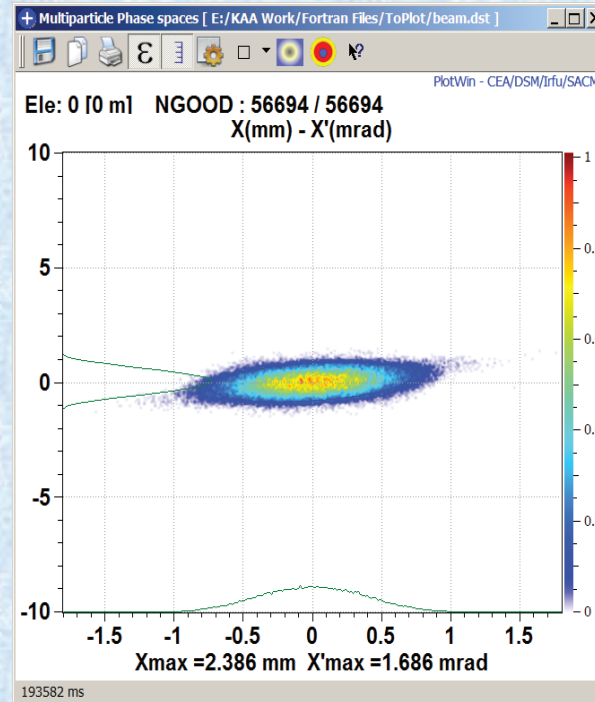

$$\epsilon_x (\text{rms}) = 0.0258 \pi \cdot \text{mm} \cdot \text{mrad}$$

$$\epsilon_x (96.41\%) = 0.1032 \pi \cdot \text{mm} \cdot \text{mrad}$$

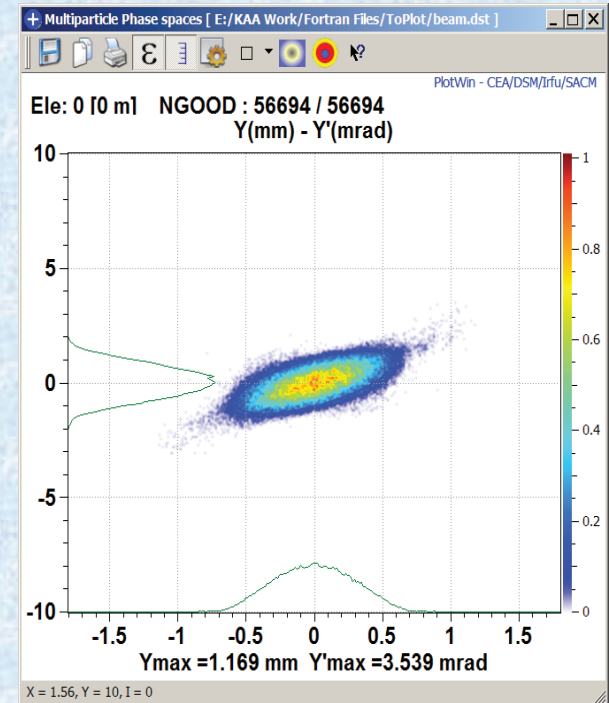

$$\epsilon_y (\text{rms}) = 0.0258 \pi \cdot \text{mm} \cdot \text{mrad}$$

$$\epsilon_y (96.41\%) = 0.1032 \pi \cdot \text{mm} \cdot \text{mrad}$$

Transmission

Longitudinal emittance rise

Transversal emittance rise

The phase length of the bunch of ~

is extremely small for such proton energy;

A frequency jump of 6 times is possible!

(MEBT-1 + DTL)

(DTL/RFQ)

(DTL/RFQ)


99.1%;

1.20;


1.01;

4 degrees -

Accelerating Structure in the Main Part

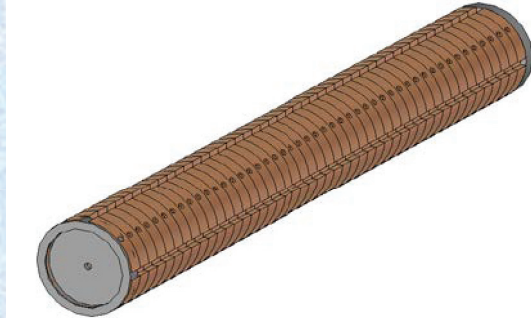


TW structure

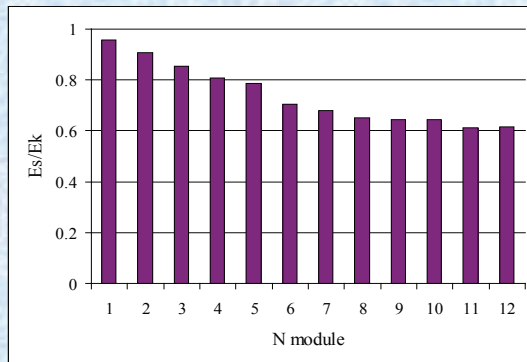

Esmax/Ek ratio

1. – frequency 2856 MHz;
2. -traveling wave accelerating structure;
3. – constant gradient mode;
4. - 12 accelerating modules;
5. – application (as accelerating) backward ($n = -1$, at the beginning) and direct ($n = 0$, further) field harmonics;
6. the simple shape of magnetically coupled cells,
7. short filling time;
8. average accelerating rate (over the structure) of 13.2 MV/m;
9. moderate surface field;
10. sufficient vacuum conductivity.



Cell

Mastering the level of surface treatment with NC equipment and reliable operation in the future.

RF sources for Main Part

We need in total 144 MW of pulse RF power (average 240 kW) .

Klystrons:

<i>Parameter</i>	<i>Mastered</i>	<i>Wishes</i>
<i>Frequency, MHz</i>	2856	2856
<i>Output power, MW</i>	>5.5	12
<i>Pulse length, mks</i>	7-16	7-16
<i>Duty cycle</i>	>240	>600
<i>Efficiency</i>	>40%	>55%?
<i>Voltage, kV</i>	<55	< 65?

Modulators, promising development: Modular compact solid-state modulators for particle accelerators. Journal of Physics: Conf. Series 941 (2017) 012095



https://toriy.ru/upload/iblock/e49/KIU_268.pdf

*From experience of INR 600 MeV proton linac operation, we like MBK (KIU 40). But 24 klystrons looks extra. We have wishes, (realistic *)*

Yu. Paramonov, private communications.

**Upgrade is possible.
A. Zavadtsev, private
communications.**


Focusing Elements and Lattice

PMQ lenses with SmCo5 magnets.

Due to a small aperture of $r < 4$ mm the high focusing gradient can be achieved up to 260 T/m (simulations).

*Initial Part,
PMQ doublets,
 $76 \text{ T/m} < G < 120 \text{ T/m}$*

*Main Part,
PMQ,
 $G < 215 \text{ T/m}$*

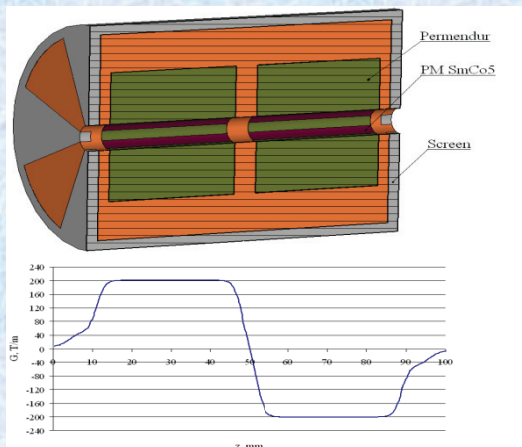


For details see A. Durkin et. al., LaPLAZ 2021, Moscow, v.2, p. 311

Reserve is sufficient. Not so easy, but possible.

A. Picardi et. al., PRAB, 23, 020102 (2020)

Energy regulation

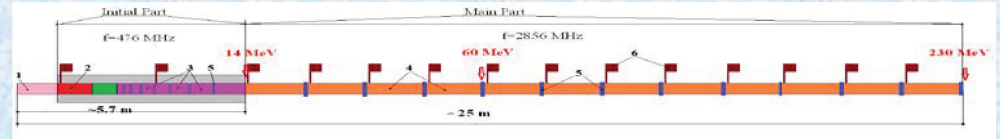

Modules 7-12 off


The maximal energy changing time is from one RF pulse to another. The simplest option is manipulation with a RF phase in one module (subsequent ones are disabled).

Modules 11-12 off

All time the beam envelope along the Main Part is within 1.0 mm.


Last module – much more flexible.

Another options for energy regulations are under study.

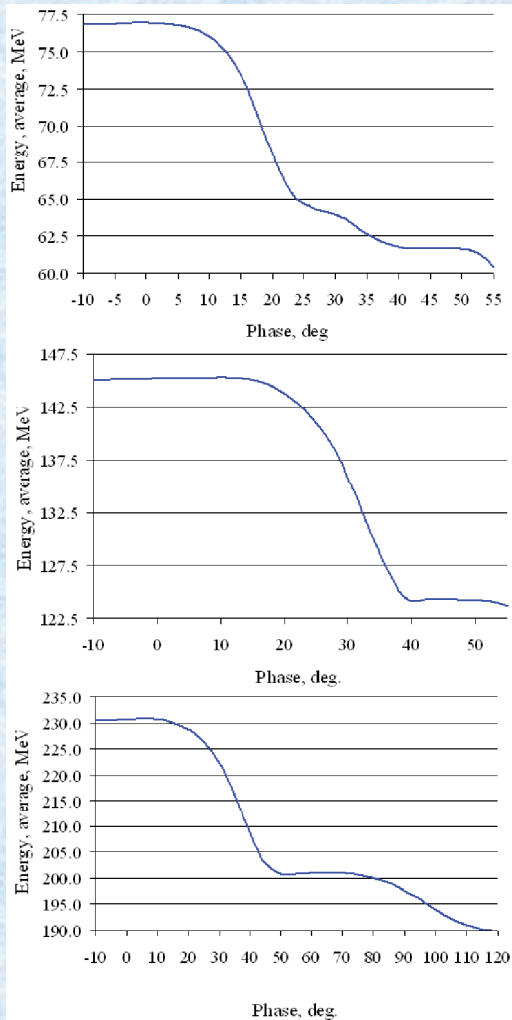



Front – end simulations

Beam portraits in phase space


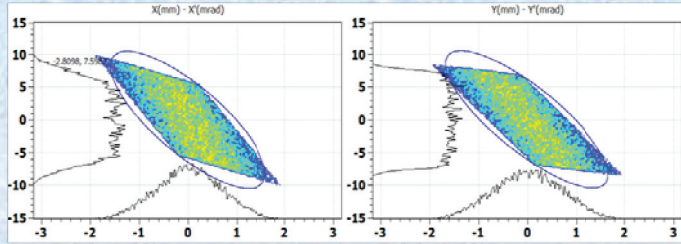


Pencil-like
beam



RFQ input

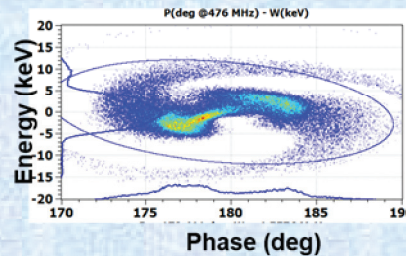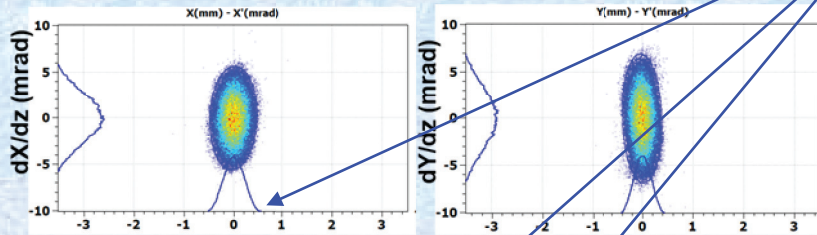

RFQ output

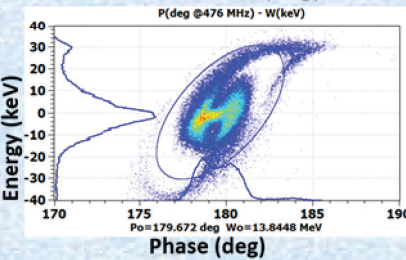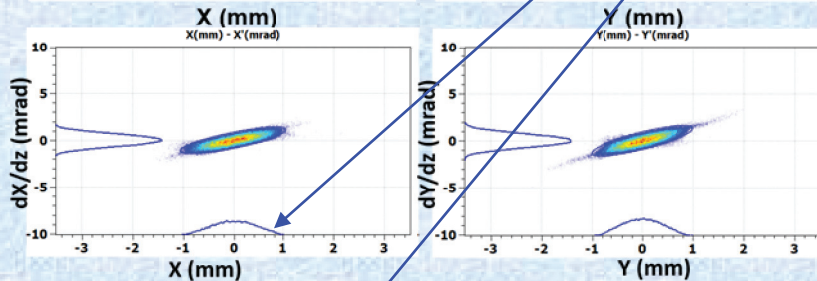

DTL output

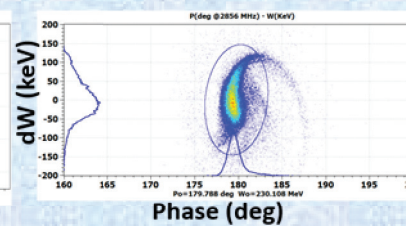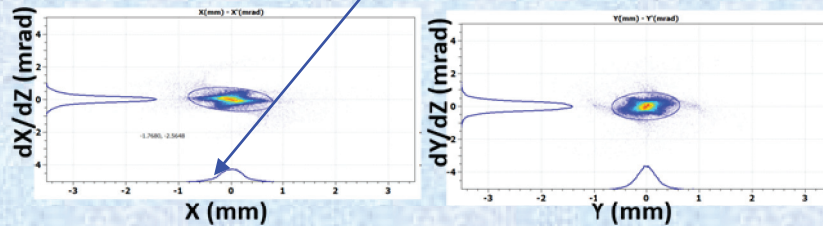

TW output


Main features

- | | |
|---|--|
| <i>1. Output proton energy, max, MeV -</i> | <i>230,</i> |
| <i>2. Total length, m</i> | <i>~25.5,</i> |
| <i>3. Pulsed operation, repetition rate,</i> | <i>~50 Hz,*</i> |
| <i>4. RF pulse length, μs,</i> | <i>up to 16,</i> |
| <i>5. Energy regulation, range, MeV</i> | <i>60-230,</i> |
| <i>6. Time for energy change, ms,
from RF pulse to pulse)</i> | <i><20 (maximal –</i> |
| <i>7. Pulse beam current, mA</i> | <i>up to 1.6, *,**</i> |
| <i>8. Number of protons in the bunch,</i> | <i>up to $2.1 \cdot 10^7$</i> |
- * - to be defined at the stage of technical development;*
- ** - the concept works to the current up to 3 mA.*

Radiation effect estimates.

Poster MOPSC01 for details.

For estimations – water
phantom $10*10*10\text{ cm}^3$




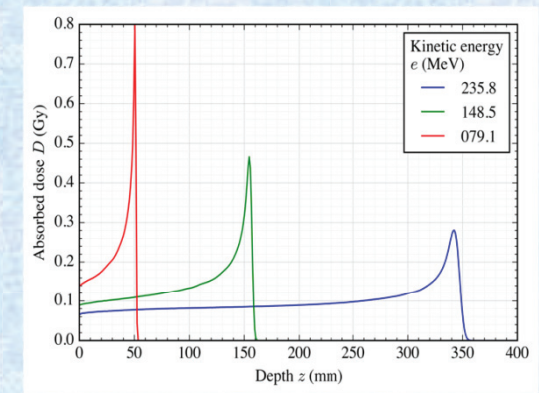


Mode

Therapy

FLASH

Ultra FLASH

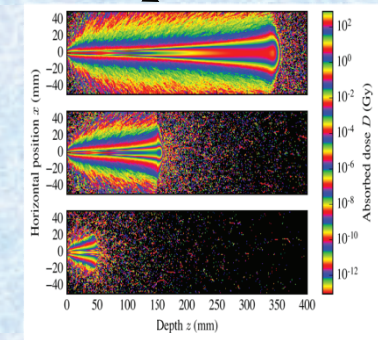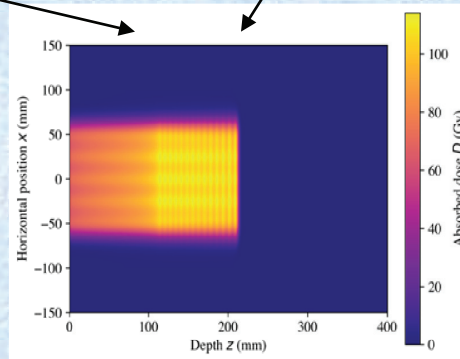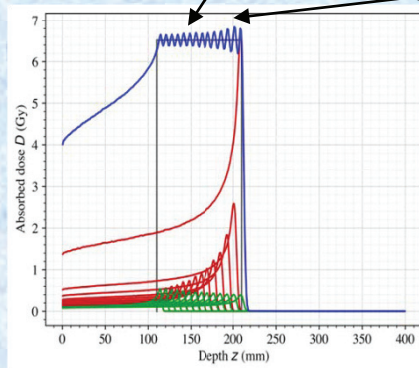

Spot scanning
direct beam,
reduced current,
 $t \sim 15\text{ sec.}$,

Fluffy spot
1.6 mA beam
 $t \sim 0.5\text{ sec.}$,

Restricted volume
direct beam, one pulse,
 $t \sim 15\text{ }\mu\text{s}$

SUMMARY

- 1. The physical substantiation of a proton linac for use in proton therapy is presented.*
- 2. The functional capabilities of the linac ensure its use in both practical and research medicine.*
- 3. To provide broad functionality, both traditional solutions are optimized and new proposals for accelerator systems are justified.*
- 4. Conservative, long-term proven system parameters ensure reliable stable operation.*
- 5. For the construction of the accelerator equipment, the **mastered** level of technologies and the characteristics of the equipment, **achieved** in the **national** high-tech industry are sufficient. The feasibility of the desired improvements is **beyond doubt**.*
- 6. In terms of a **complete set** of functional, economic and operational parameters, the proposed linac surpasses both cyclic facilities and advanced foreign competitors.*

ACKNOWLEDGEMENTS

*The authors are very grateful colleagues from INR ,
especially*

*L. Kravchuk, S. Akulinichev and A. Feschenko,
for their support of the work, useful discussions and
recommendations.*

*The authors also thank DESY PITZ group for the opportunity
provided in the framework of the collaboration to carry out
part of the calculations for illustrative drawings
using CST software.*

Thank You for attention!