

FIRST ACCELERATION OF HEAVY ION BEAMS WITH A SUPERCONDUCTING CONTINUOUS WAVE HIM/GSI CW-LINAC*

M. Basten[†], M. Busch, H. Podlech, M. Schwarz, IAP Goethe-Universität Frankfurt, Germany
 K. Aulenbacher¹, W. Barth, F. Dziuba, V. Gettmann, T. Kürzeder, M. Miski-Oglu, Helmholtz Institute Mainz, Germany, also GSI Helmholtzzentrum für Schwerionenforschung, Darmstadt, Germany
 M. Heilmann, A. Rubin, A. Schnase, S. Yaramyshev, GSI Helmholtzzentrum für Schwerionenforschung, Darmstadt, Germany
¹ also Johannes Gutenberg-Universität Mainz, Germany

Abstract

In the future a new superconducting (sc) continuous wave (cw) high intensity heavy ion Linac should provide ion beams with a max. beam energy above the coulomb barrier for the Super Heavy Element (SHE) program at GSI Helmholtzzentrum für Schwerionenforschung. As a first step a newly developed superconducting 15-gap Crossbar H-cavity (CH-cavity) operated at 217 MHz has been successfully tested with heavy ion beam up to the design beam energy of 1.85 MeV/u for the first time. The design energy gain of 3.5 MV within a length of less than 70 cm has been validated with heavy ion beams of up to 1.5 μ A. The measured beam parameters showed excellent beam quality, while a dedicated beam dynamics layout provides beam energy variation between 1.2 and 2.2 MeV/u. The beam commissioning is a milestone of the R&D work of Helmholtz Institute Mainz (HIM) and GSI in collaboration with Goethe University Frankfurt (GUF) and the first step towards a sc heavy ion cw-Linac with variable beam energy. The first tests under cryogenic conditions of the next two CH-cavities have already been started at GUF in a vertical cryostat. The results of the first successful heavy ion beam acceleration with a superconducting CH-cavity will be presented.

INTRODUCTION

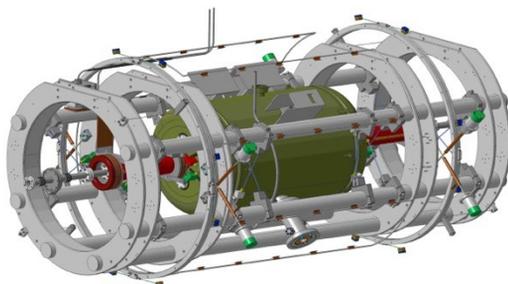


Figure 1: Demonstrator CH-cavity (CH0) with two solenoids inside the support frame.

The design and construction of cw high intensity Linacs is a crucial goal of worldwide accelerator technology development [1]. Above all, compactness of a particle accelerator is a beneficial demand for the development of

*Work supported by the BMBF, project number 05P15RFBA, MYRTE which is funded by the European Commission under Project-ID 662186 and Helmholtz International Center for FAIR.

[†]Basten@iap.uni-frankfurt.de

high intensity cw proton and ion Linacs [2]. The study and investigation of the design, operation and optimization of a cw-Linac, as well as progress in elaboration of the superconducting technology [3] is of high relevance.

For the HIM/GSI cw-Linac HELIAC (HElmholtz Line- ar ACcelerator) several superconducting CH cavities operated at 217 MHz are used to provide acceleration of ions with a mass to charge ratio of up to 6 to beam energies between 3.5 MeV/u and 7.3 MeV/u, while the energy spread should be kept smaller than ± 3 keV/u. For proper beam focusing superconducting solenoids have to be mounted between the CH cavities. The general parameters are listed in Table 1 [4]. R&D and prototyping (demonstrator project) [5] in preparation of the proposed HELIAC is assigned to a collaboration of GSI, HIM and GUF. The demonstrator setup is located in straightforward direction of the GSI-High Charge State Injector (HLI).

Table 1: Design Parameters of the cw-Linac

Mass/charge		6
Frequency	MHz	216.816
Max. beam current	mA	1
Injection energy	MeV/u	1.4
Output energy	MeV/u	3.5 – 7.3
Output energy spread	keV/u	± 3
Length of acceleration	m	12.7
Sc CH-cavities	#	9
Sc solenoids	#	7

The demonstrator comprises a 15 gap sc CH-cavity (CH0) embedded by two superconducting solenoids; all three components are mounted on a common support frame (see Fig. 1) [6]. The beam focusing solenoids consist of one main Nb₃Sn-coil and two compensation coils made from NbTi that shield the maximum magnetic field of 9.3 T within a longitudinal distance of 10 cm down to 30 mT. The solenoids are connected to LHe ports inside the cryostat by copper tapes allowing dry cooling. The sc CH structure CH0 is the key component and offers a variety of research and development [7].

PREPARATION OF RF-CAVITY AND SUPPLY SYSTEM

The sc 15 gap CH-cavity is directly cooled with liquid helium, supported by a helium jacket made from titanium. The first performance test of the cavity was conducted without helium jacket at GUF in a vertical cryostat with low RF power after high pressure rinsing (HPR) at the vendor Research Instruments GmbH (RI). Gradients up to 7 MV/m could be achieved. After the final assembly of the helium vessel and further HPR preparation at RI, the cavity was tested in a horizontal cryostat at GSI. As depicted in Fig. 2, the cavity showed improved performance due to an additional HPR treatment. The initial design quality factor Q_0 has been exceeded by a factor of four, a maximum accelerating gradient of $E_a = 9.6$ MV/m at $Q_0 = 8.14 \times 10^8$ has been achieved [8-10]. Prior beam commissioning of the cavity, the RF power couplers [11-12] were tested and conditioned with a dedicated test resonator [13].

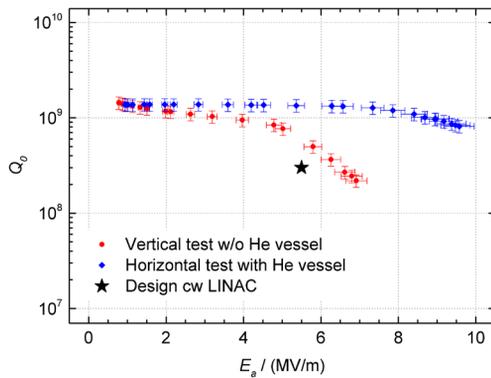


Figure 2: RF-testing of CH-demonstrator cavity - improved performance (add. HPR), low field emission rate, high field gradient, therm. quenching beyond 9.6 MV/m.

For this the couplers were equipped with sensors to control the temperature of the ceramic windows and Langmuir probes to detect multipacting currents. First conditioning [14] has been performed up to 5 kW with pulsed power and up to 2 kW in cw-mode. Further increase of the forward cw-RF power results in a temperatures rise of more than 80°C at the ceramic window, potentially sufficient to damage the coupler. During the operation, the "cold" coupler window has been anchored to the liquid nitrogen supply tube by copper ribbons. The power couplers as well as three frequency tuners, developed at IAP [15] and manufactured at GSI have been integrated in the RF-cavity in a clean room of class ISO4. Furthermore, the CH-cavity and both solenoids were assembled on a string. After leak testing of the accelerating string the complete cold mass was integrated [16] into the cryostat outside of the clean room.

DEMONSTRATOR-BEAM DYNAMICS

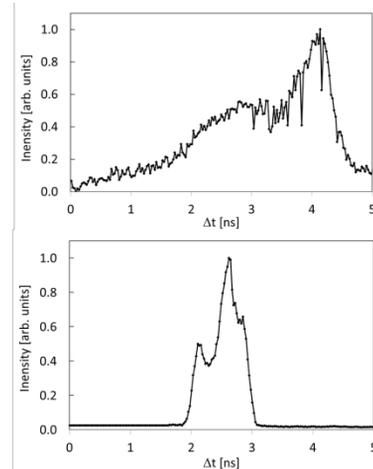


Figure 3: Bunch shape measurement for HLI beam at 1.366 MeV/u (top) and at same energy for matched case with rebuncher R1 and R2 (down).

The beam dynamics layout behind the HLI at 1.4 MeV/u has been simulated in advance. In a preparing beam test run, it could be confirmed, that the room temperature focusing quadrupoles (triplet and two duplets) and two rebuncher cavities are sufficient to provide for full 6D-matching to the demonstrator [17]. At the same time, the input beam is axially symmetric for further solenoid focusing due to especially chosen gradients, while bunch length (see Fig. 3) and momentum spread are matched as well.




Figure 4: Layout of matching line to the Demonstrator and beam diagnostics test bench; QT/QD = quadrupole triplet/duplet, R = rebuncher, X/Y = beam steerer, G = SEM-grid, T = current transformer, P = phase probe, BSM = bunch shape monitor, EMI = emittance meter.

The transport line (see Fig. 4) provides also for beam instrumentation. Moreover, beam transformers, Faraday cups, SEM-profile grids, a dedicated emittance meter, a bunch structure monitor and phase probe pickups (beam energy measurements applying time of flight) provide for proper beam characterization behind the demonstrator.

The beam dynamics layout of the sc cw-Linac is based on the EQUUS (EQUidistant mULTigap Structure) concept, as proposed in [18]. It features high acceleration efficiency with longitudinal and transversal stability, as well as a straightforward energy variation by varying the applied RF-voltage or the RF-phase of the amplifier. Highly charged ions with a mass-to-charge ratio of maximum 6 will be accelerated from 1.4 MeV/u up to 3.5 - 7.3 MeV/u. Energy variation while maintaining a high beam quality is the core issue with respect to beam dynamics, simulated using advanced software [19-20] and previously developed algorithms [21-23]. The constant

Content from this work may be used under the terms of the CC BY 3.0 licence (© 2018). Any distribution of this work must maintain attribution to the author(s), title of the work, publisher, and DOI.

cell length inside an EQUUS designed cavity is fixed for a higher (geometrical) β compared to the injection beam energy (constant- β structure). As a consequence of constant- β structure leads to a sliding movement in longitudinal phase space. Trajectory and energy gain depend strongly on the initial phase at the first gap centre and the difference between particle energy and design energy. The corresponding transversal emittance evolution has been measured in a broad range with small emittance growth. Beam dynamics behind the HLI has been carried out with the LORASR code (see Fig. 5) [24]. The quadrupole triplet and duplets provide for an axially symmetric input beam for further solenoid focusing. The beam is matched to the demonstrator in the 6d phase space.

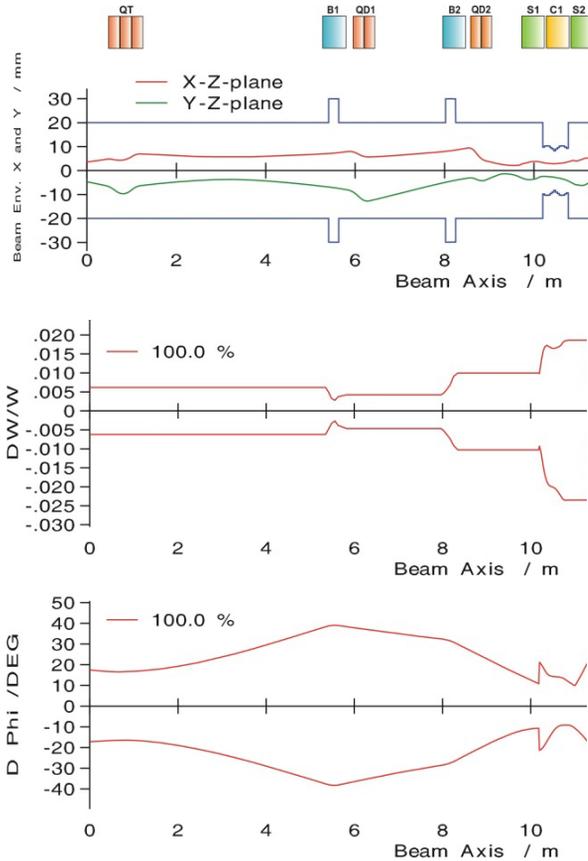


Figure 5: Beam envelopes (matching the demonstrator).

FIRST BEAM ACCELERATION

At June 2017, after successful RF-testing of the sc RF-cavity in 2016, set up of the matching line to the demonstrator and a short commissioning and ramp up time of some days, the CH0-cavity first time accelerated heavy ion beams (Ar^{11+}) with full transmission up to the design beam energy of 1.866 MeV/u ($\Delta W_{\text{kin}} = 0.5 \text{ MeV/u}$) [25], as shown in Fig. 6. For the first beam test the sc cavity was powered with 10 Watt of net RF power, providing an accelerating voltage of more than 1.6 MV inside a length of 69 cm. Further on the design acceleration gain of 3.5 MV has been verified and even exceeded by accelera-

tion of beam with high rigidity ($A/q = 6.7$). As summarized in Table 2, argon and helium ion beams with different charge state from an Electron Cyclotron Resonance ion source ($^4\text{He}^{2+}$, $^{40}\text{Ar}^{11+}$, $^{40}\text{Ar}^{9+}$, $^{40}\text{Ar}^{6+}$) were accelerated at HLI with the demonstrator. For longitudinal beam matching the rebuncher settings were adapted according to the mass-to-charge ratio A/q , as well as the acceleration voltage.

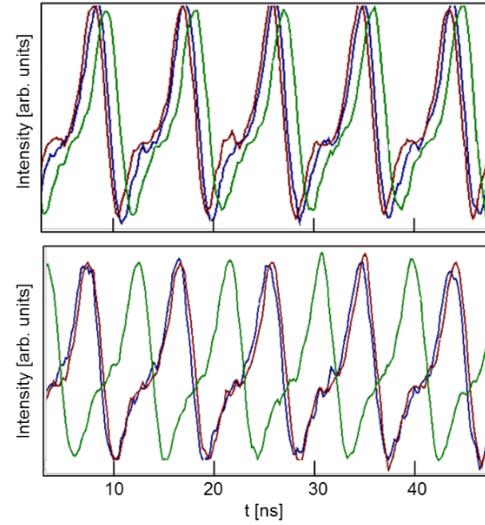


Figure 6: First RF-acceleration with the 216.816 MHz-CH-cavity; measured Ar^{11+} -phase probe signals from HLI beam at 1.366 MeV/u (top), HLI-RF-frequency is 108.408 MHz ($T = 9.224 \text{ ns}$). By acceleration up to the nominal beam energy (down), the coarse time of flight between blue and red signal is slightly reduced. The time of flight for the fine measurement between red and green signal is significantly shifted, according to the beam energy of 1.866 MeV/u.

Table 2: RF- Parameters for Matched Case

	He^{2+}	Ar^{11+}	Ar^{9+}	Ar^{6+}
A/q	2.0	3.6	4.4	6.7
$U_{\text{Reb1,eff.}}$ [kV]	8.3	15.0	18.3	27.9
$U_{\text{Reb2,eff.}}$ [kV]	22.7	40.8	49.9	75.9
$E_{\text{acc,CH}}^*$ [MV/m]	1.8	3.2	3.9	5.9
U_0 [MV]	1.2	2.2	2.7	4.0

* $E_{\text{acc}} = \text{transit time factor} \times \text{total accelerating voltage} / (n \times 0.5 \times \beta \lambda)$

A maximum average beam intensity of 1.5 μA has been achieved, limited only by the beam intensity of the ion source and maximum duty factor (25%) of the HLI, while the CH-cavity was operated in cw-mode. All presented measurements were accomplished with high duty factor beam and maximum beam intensity from the HLI.

SYSTEMATIC BEAM INVESTIGATIONS

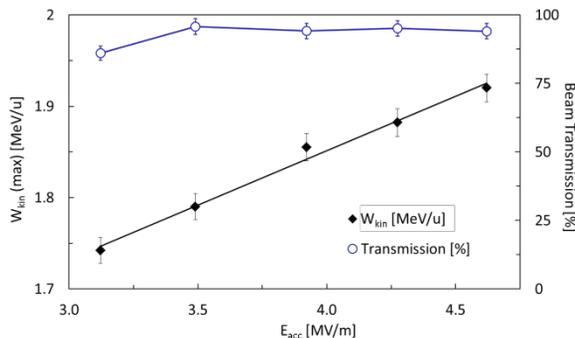


Figure 7: Acceleration of an Ar^{9+} -beam; maximum achieved beam energy and transmission as function of the (eff.) accelerating gradient [25].

A full measured 2D-scan of beam energy and beam transmission for a wide area of different accelerating fields and RF-phases has been performed. The linear increase of beam energy with ramped accelerating gradient (as shown in Fig. 7) could be observed for different RF-phase settings, while the beam transmission is kept above 90%. In general these measurements confirm impressively the EQUUS beam dynamics, featuring effectively beam acceleration up to different beam energies without particle loss and significant beam quality degradation. As measured with helium beam, for lighter ions a maximum beam energy of up to 2.2 MeV/u could be reached with the demonstrator cavity, but with reduced beam quality.

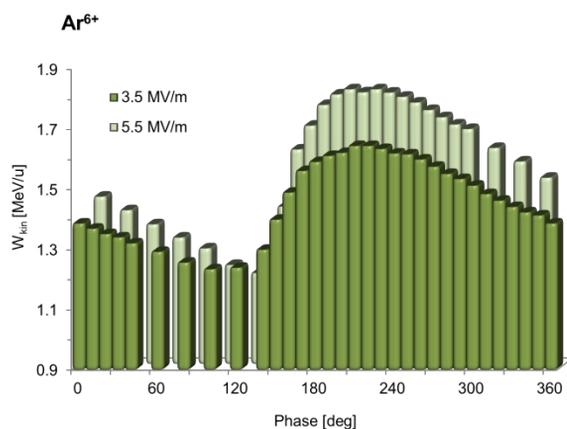


Figure 8: Phase-scan of Ar^{6+} -beam energy for 3.5 MV/m and 5.5 MV/m [25].

With Ar^{6+} -beam ($A/q = 6.7$), an energy gain above 0.5 MeV/u could be reached with an accelerating gradient of 6 MV/m. As an example, Fig. 8 shows a fully measured 360° phase scan for two different accelerating gradients (3.5 MV/m and 5.5 MV/m). All individual data as well as the characteristic shapes of the phase scans are in good agreement according to the accelerating gradient. For an increased gradient the maximum beam energy at an RF-phase of 210° boosts as well, while the minimum

beam energy at 130° could be decreased down to 1.2 MeV/u. The bunch length detected with a bunch shape monitor (BSM) [26-27] was measured as very sensitive to RF-phase changes. A change of RF-phase by 30° only, leads to a significant change of bunch length (by more than a factor of four), while the beam transmission is not affected. For further matching to another CH-cavity, the adjustment of the beam energy setting by changing the RF-amplitude is more favourable - compared to changing the RF-phase - as no significant bunch shape change could be observed.

PHASE SPACE MEASUREMENTS

At first the beam quality has been characterized by measuring the phase space distribution for different energies [25]. The measured emittance of the argon beam, delivered by the HLI, is adequately low. The total 90% horizontal beam emittance is measured for 0.74 μm , while the vertical emittance is 0.47 μm only. All measurements have been performed without solenoidal field, therewith any additional emittance degradation effects by different beam focusing could be avoided. The measured (normalized) beam emittance growth at full beam transmission is sufficiently low: 15% (horizontal plane) and 10% (vertical plane). Selective measurements at other RF-amplitudes and -phases, as well as for other beam rigidities confirmed the high (transversal) beam performance in a wide range of different parameters.

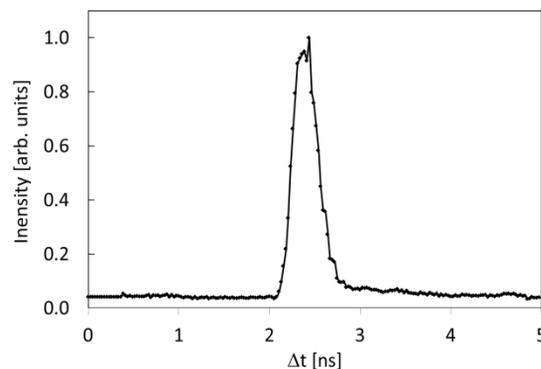


Figure 9: Bunch shape of Ar^{9+} -beam fully matched after acceleration to 1.85 MeV/u [25].

Besides beam energy measurements the bunch shape for the matched case was measured with the Feschenko monitor [27] (see Fig. 9). As shown, an impressive small minimum bunch length of about 300 ps (FWHM) could be detected, sufficient for further matching to and acceleration in future RF-cavities.

ADVANCED R&D

Up to now, the reference design for the cw-Linac dates back to [4]. Meanwhile many experiences have been gained in design, fabrication and operation of sc CH-cavities and the associated components. In this context, a revision of the Linac layout was recommended. Opti-

Content from this work may be used under the terms of the CC BY 3.0 licence (© 2018). Any distribution of this work must maintain attribution to the author(s), title of the work, publisher, and DOI.

mized cavity layouts [28] resulted in modified voltage distributions. Furthermore, the layout - now with three CH-cavities and a sc rebuncher (see Fig. 10) [29] per cryo module - has been specified with more details. It features high acceleration efficiency with longitudinal and transversal stability, as well as a straightforward energy variation. Highly charged ions with a mass-to-charge ratio of maximum 6 will be accelerated from 1.4 MeV/u up to 3.5- 7.3 MeV/u. High beam quality and beam energy variation is the core feature of the cw-Linac to be noticed especially at beam dynamics layout [19-21, 23, 30-32].

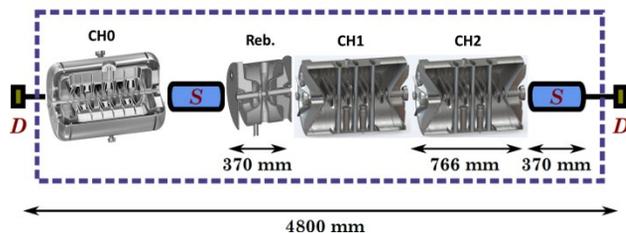


Figure 10: Advanced cryo module layout containing demonstrator CH0 cavity, two short CH cavities, a rebuncher and two solenoids.

Meanwhile the next two CH cavities CH1 and CH2 have already been constructed and CH1 has already been tested under cryogenic conditions (see Table 3). After a fast cooldown with 1.8 K/min, to avoid hydrogen related Q-disease and several days of RF conditioning, all multipacting barriers could permanently be surmounted and the RF performance of the cavity could be determined. Fig. 11 shows the resulting Q_0 vs. E_a curve of the vertical test without helium vessel [33]. The Q-value dropped from $Q_0^{\text{low}} = 1.02 \cdot 10^9$ at low field levels down to $Q_0^{\text{high}} = 2.43 \cdot 10^8$ at a maximum gradient of $E_a = 9$ MV/m. This corresponds to a total voltage of $U_{\text{eff}} = 3.32$ MV inside the cavity. The design Q-value of $3 \cdot 10^8$ is reached at an accelerating gradient of $E_a = 8.52$ MV/m, which is 55% above the design gradient of $E_a = 5.5$ MV/m. Field emission started at field gradients above $E_a = 5$ MV/m; the Fowler-Nordheim plot resulted in a field enhancement factor of about 80 [33].

Table 3: Main Results of the First RF Test of CH1 [33]

Q_0^{low}		$1.02 \cdot 10^9$
R_{BCS}	$n\Omega$	12.6
R_{mag}	$n\Omega$	9.78
R_0	$n\Omega$	26.02
E_a	MV/m	9
U_{eff}	MV	3.32
Q_0^{high}		$2.43 \cdot 10^8$

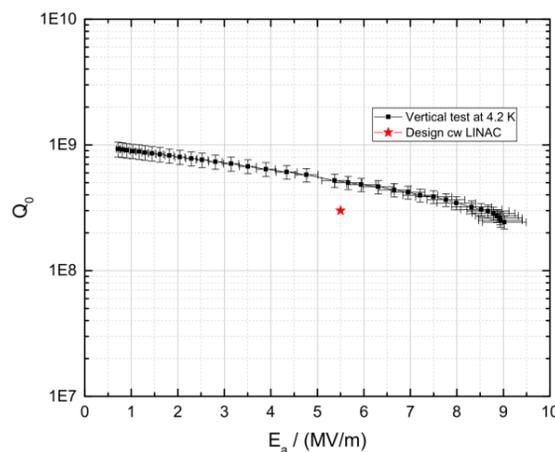


Figure 11: RF-testing of CH1 in a vertical cryostat without helium vessel; a maximum field gradient E_a of 9 MV/m has been measured.

SUMMARY

An advanced cw-Linac approach, based on a standard cryomodule equipped with three CH-cavities and a sc-rebuncher, demonstrates the high capabilities due to energy variation preserving the beam quality, as shown in the first beam test. The design acceleration gain of the first sc CH-cavity was achieved with heavy ion beams even above the design mass to charge ratio at full transmission and maximum available beam intensity [34]. The beam quality was measured as excellent in a wide range of different beam energies, This new design could provide beam acceleration for ions with different mass-to-charge ratio even above the design beam energy, featuring the ambitious GSI-user program, while the GSI-UNILAC is upgraded for short pulse high current FAIR-operation. [35]. The achieved demonstrator beam commissioning confirms the capabilities of the applied EQUUS beam dynamics design and is a major milestone paving the way to the cw-Linac HELIAC. First extensive tests under cryogenic conditions with CH1 showed promising results with an accelerating gradient of up to $E_a = 9$ MV/m and low field emission rates [33] confirming the optimized cavity layout [28].

ACKNOWLEDGEMENTS

Successful beam testing could not be accomplished without strong support of highly committed people from different GSI-departments. The beam test is a milestone of the R&D work of HIM and GSI in collaboration with GUF preparing a superconducting heavy ion cw Linac.

REFERENCES

- [1] C. Prior, Overview of High Intensity Accelerator Projects, Proceedings of HB'10, Morschach, Switzerland, pp. 6-10 (2010).
- [2] S.M. Polozov *et al.*, Beam dynamics study and electro-dynamics simulations for the cw RFQ, Proceedings of IPAC2017, Copenhagen, Denmark, pp. 1333-1336 (2017).
- [3] R. Laxdal, Physica C-Superconductivity and its Applications, Volume: 441, Issue: 1-2, Pages: 13-20, (2006), doi: 10.1016/j.physc.2006.03.096
- [4] S. Minaev *et al.*, "Superconducting, energy variable heavy ion linac with constant β , multicell cavities of CH-type", Phys. Rev. ST Accel. Beams 12, 120101, (2009). doi: 10.1103/PhysRevSTAB.12.120101
- [5] W. Barth *et al.*, "A superconducting CW-LINAC for heavy ion acceleration at GSI", EPJ Web of Conferences, vol. 138, article number 01026, (2017). doi: 10.1051/epjconf/201713801026
- [6] F. Dziuba *et al.*, "First Cold Tests of the Superconducting cw Demonstrator at GSI", in *Proc. of RuPAC'16*, St. Petersburg, Russia, Oct. 2016, paper WECBMH0, pp. 83-85.
- [7] T. Kürzeder *et al.*, Infrastructure for Superconducting CH-Cavity Preparation at HIM *Proc. of IPAC'18*, Vancouver, Canada, 2018, Paper WEPML045, p.p.2796-2799, doi: 10.18429/JACoW-IPAC2018-WEPML045
- [8] F. Dziuba *et al.*, First Performance Test on the Superconducting 217 MHz CH Cavity at 4.2 K, Proceedings of LINAC'16, East Lansing, MI, USA, pp. 953-955 (2016).
- [9] F. Dziuba *et al.*, First Cold Tests of the Superconducting cw Demonstrator at GSI, Proceedings of RuPAC'16, St. Petersburg, Russia, p. 83-85 (2016).
- [10] F. Dziuba *et al.*, "RF Commissioning of the Superconducting 217 MHz CH Cavity for Heavy Ions and First Beam Operation", Proc. of LINAC2018, paper THPO073, this conference.
- [11] M. Heilmann *et al.*, High power RF coupler for the cw-linac demonstrator at GSI, in proceedings of IPAC'17, Copenhagen, Denmark, pp. 990-992 (2017).
- [12] J. List *et al.*, "High Power Coupler R&D for Superconducting CH-cavities", Proc. of LINAC2018, paper THPO107, this conference
- [13] M. Busch *et al.*, Update on the sc 325 MHz CH-cavity and power coupler processing, proceedings of LINAC'16, East Lansing, MI, USA, pp. 913-915 (2017).
- [14] F. Dziuba *et al.*, "Performance tests of the superconducting 217 MHz CH cavity", in *Proc of SRF'17*, Lanzhou, China, 2017, paper TUPB024.
- [15] M. Amberg *et al.*, The fast Piezo-based frequency tuner for sc CH-cavities, Proceedings of LINAC'14, Geneva, Switzerland, pp. 214-216 (2014).
- [16] V. Gettmann *et al.*, "Commissioning of a superconducting cw heavy ion Linac@GSI", in *Proc of SRF'17*, Lanzhou, China, 2017, paper MOPB094.
- [17] M. Schwarz *et al.*, "Beam Dynamics for the sc cw heavy ion Linac at GSI", in *Proc of IPAC'15*, Richmond, VA, USA, 2015, p. 3742-3744.
- [18] M. Miski-Oglu *et al.*, "Steps towards superconducting cw-Linac for heavy ions at GSI", in *Proc of SRF'17*, Lanzhou, China, 2017, paper MOPB024.
- [19] R. Tiede *et al.*, "LORASR Code Development", in *Proc of EPAC'06*, Edinburgh, Scotland, 2006, pp. 2194-2196.
- [20] S. Yaramyshev *et al.*, Nucl. Instr. Meth. Phys. Res., Sect. A, vol. 558/1 (2006), pp. 90-94. doi: 10.1016/j.nima.2005.11.018
- [21] S. Yaramyshev *et al.*, "An advanced procedure for longitudinal beam matching for sc cw heavy ion linacs", in *Proc of HB'16*, Malmö, Sweden, 2016, pp. 571-574.
- [22] M. Schwarz *et al.*, "Beam Dynamics Simulations for the New Superconducting CW Heavy Ion Linac at GSI", in *Proc of SRF'17*, Lanzhou, China, 2017, paper MOPB005.
- [23] S. Yaramyshev *et al.*, "Virtual charge state separator as an advanced tool coupling measurements and simulations", Phys. Rev. ST Accel. Beams 18, 050103, (2015). doi: 10.1103/PhysRevSTAB.18.050103
- [24] W. Barth *et al.*, "Advanced superconducting cw heavy ion linac R&D", in *Proc of IPAC'13*, Shanghai, China, 2013, pp. 3770-3772.
- [25] W. Barth *et al.*, "First heavy Ion Beam Test with a superconducting multi gap CH-cavity", Phys. Rev. ST Accel. Beams 21, 020102, (2018). doi: 10.1103/PhysRevAccelBeams.21.020102
- [26] T. Sieber *et al.* 2018 Bunch Shape Measurements at the GSI cw-Linac Prototype, *Proc. of IPAC'18*, Vancouver, Canada, may 2018, paper WEPAK006 pp.2091-2094, doi: 10.18429/JACoW-IPAC2018-WEPAK006
- [27] A.V. Feschenko, "Technique and instrumentation for bunch shape measurements", in *Proc of RuPAC'12*, St. Petersburg, Russia, Oct. 2016, pp. 181-185, paper FRXOR01.
- [28] M. Basten *et al.*, "First measurements of the next sc CH-cavities for the new superconducting cw heavy ion LINAC@GSI", Proc. of SRF2017, TUPB022
- [29] M. Gusarova *et al.*, Multipactor discharge in superconducting accelerating CH cavities, IOP Conf. Series: Journal of Physics: Conf. Series 1067 (2018) 082007 doi: 10.1088/1742-6596/1067/8/082007
- [30] S. Yaramyshev *et al.* 2018 Advanced approach for beam matching along the multi-cavity sc cw Linac at GSI, IOP Conf. Series: Journal of Physics: Conf. Series 1067 (2018) 052005 doi: 10.1088/1742-6596/1067/5/052005
- [31] M. Schwarz *et al.*, "Further steps towards the superconducting CW-linac for heavy ions at GSI", in *Proc. of IPAC'16*, Busan, South Korea, May 2016, paper MOPOY023, p. 896-898.
- [32] S. M. Polozov *et al.*, "Beam dynamics study and electro-dynamics simulations for the cw RFQ", in *Proc. of IPAC'17*, Copenhagen, Denmark, May 2017, paper TUPAB013, pp. 1333-1336.
- [33] M. Basten *et al.*, "Cryogenic Tests of the superconducting beta=0.069 CH-cavities for the HELIAC-project", Proc. of LINAC2018, paper THPO072
- [34] W. Barth *et al.*, Superconducting CH-Cavity heavy ion beam testing at GSI, IOP Conf. Series: Journal of Physics: Conf. Series 1067 (2018) 052007 doi: 10.1088/1742-6596/1067/5/052007
- [35] W. Barth *et al.*, "High brilliance uranium beams for the GSI FAIR", Phys. Rev. ST Accel. Beams 20, 050101, (2017). doi: 10.1103/PhysRevAccelBeams.20.050101